


MODEL: BF-P2000(W-A)

400V | 1500rpm | 50Hz

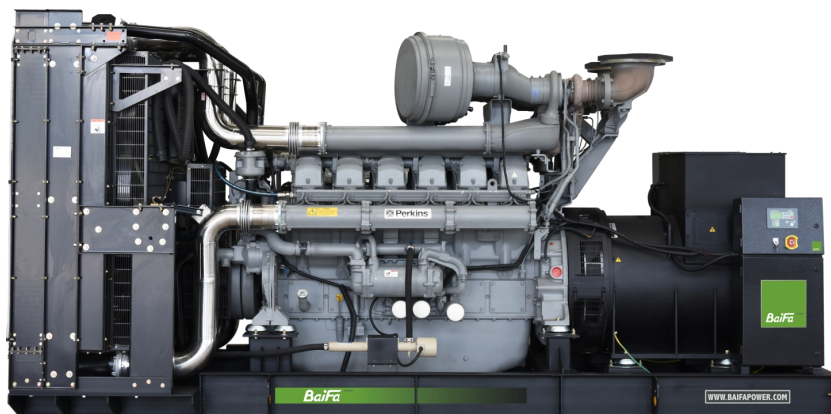

ESP Standby Power	2000 kVA	PRP Prime Power	1850 kVA
ENGINE	Perkins	ALTERNATOR	STAMFORD
	4016-61TRG1		S7L1D-F4

GENERAL FEATURES

Engine: Perkins 4016-61TRG1	Alternator: single bearing, IP23, insulation class H
50°C radiator, fans are driven by belt, with safety guard	Dry type air filter, fuel filter & oil filter
Vibration damper	Standard control panel
24V charging alternator	Exhaust bellows, elbows, flange & muffler
Lead-acid batteries, rack and cables	User manual

MODEL: BF-P2000(W-A)

400V | 1500rpm | 50Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	2624	1600kW/2000kVA	1480kW/1850kVA
415/240	50	3	0.8	2782	1600kW/2000kVA	1480kW/1850kVA
400/230	50	3	0.8	2887	1600kW/2000kVA	1480kW/1850kVA
380/220	50	3	0.8	3039	1600kW/2000kVA	1480kW/1850kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: BF-P2000(W-A)**400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Perkins 4016-61TRG1
----------------------	---------------------

Air intake system	Turbocharged
-------------------	--------------

Fuel system	Direct Injection
-------------	------------------

Cylinder arrangement	16 in V
----------------------	---------

Displacement	61.123L
--------------	---------

Bore and stroke	160×190 mm
-----------------	------------

Compression ratio	13:1
-------------------	------

Rated speed	1500rpm
-------------	---------

Max. Standby power at rated speed	1774kW
-----------------------------------	--------

Governor type	Electronic
---------------	------------

Exhaust System

Exhaust gas flow	400 m ³ /min
------------------	-------------------------

Exhaust temperature	425°C
---------------------	-------

Max back pressure	4kPa
-------------------	------

Air Intake System

Max intake restriction	3.7kPa
------------------------	--------

Combustion air flow	165 m ³ /min
---------------------	-------------------------

Air flow required for radiator	2600 m ³ /min
--------------------------------	--------------------------

Comprehensive Solutions For

POWER GENERATION



MODEL: BF-P2000(W-A)

400V | 1500rpm | 50Hz

Fuel System

Fuel consumption @ 100% (Prime Power) Load	194 g/kWh	370 L/h
Fuel consumption @ 75% (Prime Power) Load	192 g/kWh	278 L/h
Fuel consumption @ 50% (Prime Power) Load	192 g/kWh	191 L/h

Oil System

Total oil capacity	213L
Oil consumption	0.52g/kWh
Oil sump capacity	157-213L

Cooling System

Coolant capacity	350L
Max water temperature	98°C



MODEL: BF-P2000(W-A)**400V | 1500rpm | 50Hz****ALTERNATOR SPECIFICATION**

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	1900kVA
Alternator Efficiency	95.8%

MODEL: BF-P2000(W-A)**400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	


MODEL: BF-P2000(W-A)

400V | 1500rpm | 50Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		


DIMENSIONS & WEIGHT

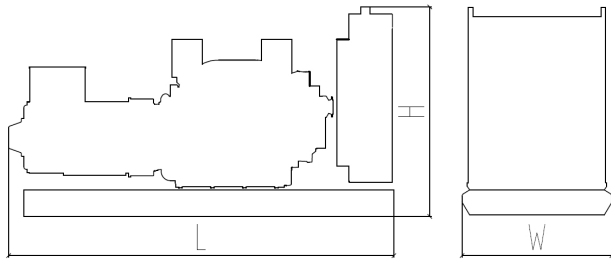

Standard Configuration (open type)

Overall Dimensions: 5710×2775×3350 mm

Weight: 13500 kg

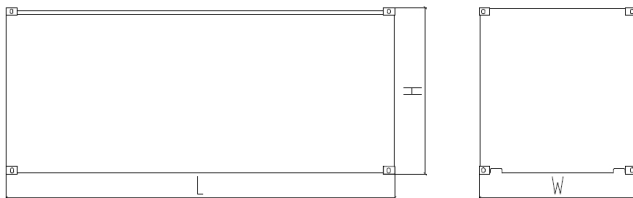

Soundproof Type (standard 40'ft HQ container)

Overall Dimensions: 12192×2438×2896 mm

Weight: 23500 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.
WEBSITE: WWW.BAIFAPOWER.COM
EMAIL: MARKETING@BAIFAPOWER.COM
TEL: +86-510-85342633

Comprehensive Solutions For
POWER GENERATION

