DC/DC Converter FW1-XXXXB3 Series



Typical Features

- ◆ Fixed input voltage, Isolated & regulated output, 1W
- ◆ High Efficiency up to 79%
- Small compact SIP packing
- No external component required
- ◆ Isolation Voltage 3000VDC
- ◆ Operating Temperature: -40°C~+85°C
- ◆ Plastic Case, meet UL94 V-0 standard

AIPULNON AIPULNON FW1-XXSXX83 80HS

Test Condition: Unless otherwise specified, data in the datasheet should be tested under the conditions of inputting nominal voltage, pure resistance rated load and $Ta=25^{\circ}C$

Application Field

It could be widely used for instrument, communication, pure digital circuit, general low frequency analog circuit, relay drive circuit, data exchange circuit, etc.

Typical Product List

ypical i loudet										
Model	Input Voltage Range (VDC)		Output Voltage/Current (Vo/lo)		Input Current(mA) Nominal Voltage		Max. Capacitiv e Load	Ripple & Noise (Max.)	Efficiency (%)full load, inpu nominal voltage	
	Nominal	Range	Voltage (VDC)	Current(mA) MAX./Min.	Full load	No Load	uF	mVp-p	Min.	Тур
			. ,		Тур.	Тур.				
FW1-05S3V3B3		4.75 - 5.25	3.3	303	290	30	3000	100	67	69
FW1-05S05B3	5		5	200	279	29	3000	100	69	7
FW1-05S12B3			12	83	256	23	3000	100	76	7
FW1-05S15B3			15	67	256	30	3000	100	75	7
FW1-05S24B3			24	42	276	40	3000	100	71	7:
FW1-12S05B3	12	11.4 - 12.6	5	200	109	10	3000	100	75	7
FW1-12S12B3			12	83	104	10	3000	100	77	79
FW1-12S15B3			15	67	103	11	3000	100	72	74
FW1-24S05B3	24	22.8 - 25.2	5	200	57	7	3000	100	72	74
FW1-24S12B3			12	83	60	11	3000	100	74	7
FW1-24S15B3			15	67	53	8	3000	100	75	7
FW1-24S24B3			24	42	63	13	3000	100	65	6

Note:

In order to ensure the converter can work reliably with high efficiency, the minimum load should not less than 10% rated load when it is used. If the needed power is indeed small, please parallel a resistor at the output side, the resistance recommended equal to 10% nominal power.

 Guangzhou Aipu Electron Technology Co., Ltd
 Add: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, CN.

 Email: market@aipu-elec.com
 Tel: 86-20-84206763
 Fax: 86-20-84206762
 HOTLINE: 400-811-8032
 Website: http://en.aipulnion.com/

 Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation.
 Version: A/4
 Date:2021-08-16
 Page 1 of 5

DC/DC Converter FW1-XXXXB3 Series



nput Specifications								
Item	Working Conditions	Mii	n.	Тур		Max.	Unit	
Input Quarabact Valtage	5Vdc Input-012Vdc Input-024Vdc Input-0					9		
Input Overshoot Voltage (1Second.max.)						18	Vdc	
· · · · ·			7	-		30		
Input Filter	Capacitor Filter							
Output Specifications								
Item	Working Conditions		Min.	Тур.	Мах	ζ.	Unit	
Output Power			0.1		1		W	
Output Voltage Accuracy	Nominal input, Full load			±2	±3		%	
Load Regulation	10% ~ 100% nominal load				1.0			
Line Regulation	Input Voltage Change±1%				±0.2	5		
Ripple & Noise①	Nominal input,full load, 20MHZ bandwidth			75	100)	mVp-p	
Temperature Drift Coefficient	100% Full Load				±0.0	3	%/°C	
Output Short Circuit Protection②	Contir			ous, self-reco	overy			
NOTE:①Ripple & Noise tested by t	twisted-pair method.							
General Specifications								
Switching Frequency	Typical			100KHz (Typ.)				
Operating Temperature	Refer to Temperature Derating Curve			-40°C ~ +85°C				
Storage Temperature				-55℃ ~ +125℃				
Shell temperature rise during work	Within Temperature Derating Curve			25°C(Typ.)				
Relative Humidity	No condensing			5%~95%				
Case Material				Black flame-retardant heat-resistant Plastic(UL94 V				
Pin Withstand Soldering Temp	Distance to case 1.5mm, 10S			300℃ MAX				
Isolation Voltage	Test 1 minute, leakage current< 0.5mA			3000Vdc				
Isolation Capacitor	Input/Output,100KHz/0.1V			20 pF (Typ.)				
	MIL-HDBK-217F@25℃			35X10⁵Hrs				
MTBF				2.1g(Typ.)				
MTBF Product Weight				25PCS				
	Tube(525*18*10n	nm)				25PCS		

 Guangzhou Aipu Electron Technology Co., Ltd
 Add: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, CN.


 Email: market@aipu-elec.com
 Tel: 86-20-84206763
 Fax: 86-20-84206762
 HOTLINE: 400-811-8032
 Website: http://en.aipulnion.com/

 Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation.
 Version: A/4
 Date:2021-08-16
 Page 2 of 5

DC/DC Converter FW1-XXXXB3 Series



Packing Dimension

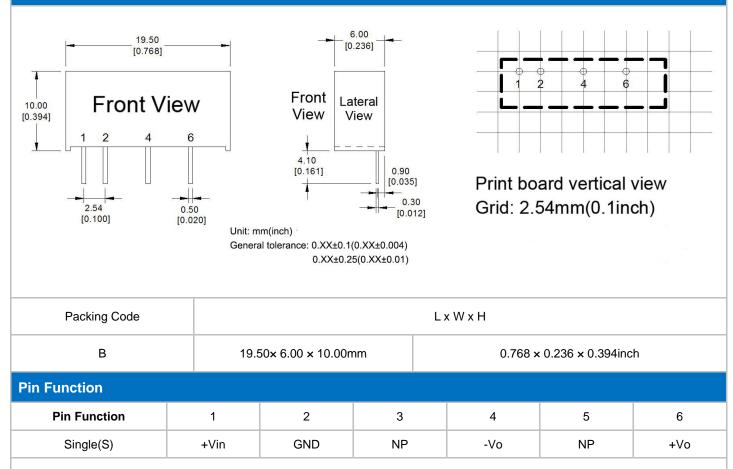


Note: if the definition of pin is not in accordance with the model selection manual, please refer to the label on actual item.

Ripple& Noise Test: (Twisted Pair Method 20MHZ bandwidth)

Test Method:

a.12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.

b. Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

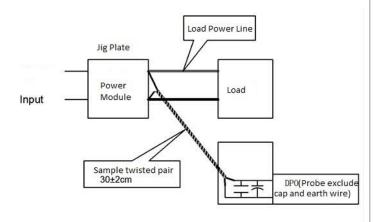


 Guangzhou Aipu Electron Technology Co., Ltd
 Add: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, CN.

 Email: market@aipu-elec.com
 Tel: 86-20-84206763
 Fax: 86-20-84206762
 HOTLINE: 400-811-8032
 Website: http://en.aipulnion.com/

 Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation.
 Version: A/4
 Date: 2021-08-16
 Page 3 of 5

CE RoHS

Temperature Curve

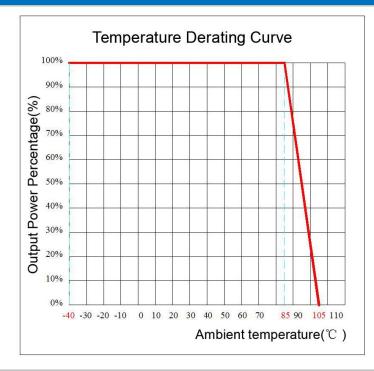

Design and Application Circuit Recommended


1. Output load requirements

a. In order to ensure the converter can work reliably with high efficiency, the minimum load should not less than 10% rated load when it is used. If the needed power is indeed small, please parallel a resistor at the output side, the resistance equal to 10% nominal load.

b. The maximum capacitive load is tested under nominal input full load, and cannot exceed the maximum capacitive load of output terminal under operation, otherwise it will cause it difficult to start up and damage the product.

2. Recommended circuit

In order to ensure the input/output ripple and noise decreased, capacitor filter net could be connected to input and output terminal, application circuit as below photo 1; choosing suitable filter capacitor is very important, start-up problems may be caused by too large capacitance. To ensure the modules running safely and reliably, the recommended capacitive load values as shown in Table 1. (But for the actual output power of application circuit is less than 0.5W, suggest not to connect external capacitor)

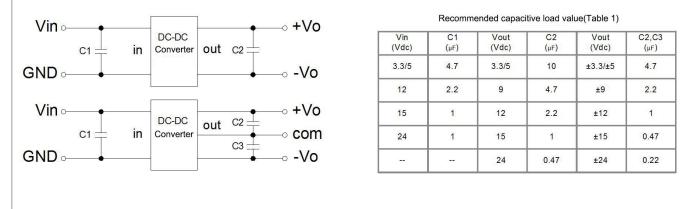

 Guangzhou Aipu Electron Technology Co., Ltd
 Add: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, CN.


 Email: market@aipu-elec.com
 Tel: 86-20-84206763
 Fax: 86-20-84206762
 HOTLINE: 400-811-8032
 Website: http://en.aipulnion.com/

 Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation.
 Version: A/4
 Date: 2021-08-16
 Page 4 of 5



3. Output regulated voltage and over voltage protection circuit

The simplest device to protect output regulated voltage, over voltage and over current is to cascade a linear regulator with overheat protection at input or output terminal, and connect a capacitor filter net(see below picture), filter capacitive value recommended see table 1, Linear regulator is chosen according to the actual voltage, current needed in working, or choose our NW series products.

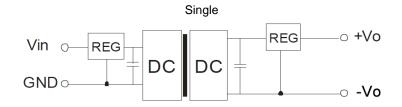

Note:

1. This product cannot be used in parallel, and do not support hot-plugging;

2.If the product works below the minimum required load, it cannot guarantee that the product performance meets all performance indicators in this manual;

3. All index testing methods in this datasheet are based on our Company's corporate standards

4. The product specification may be changed at any time without prior notice.