





FARIED

1 Color | 1 Size | 1 Finish

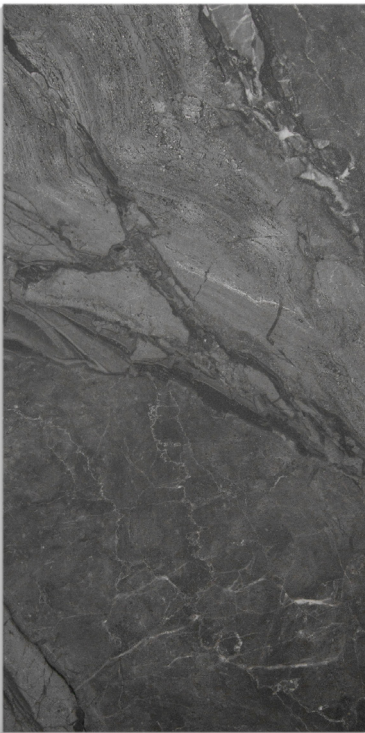

Grey

COLOR

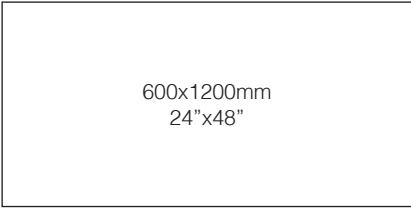

SIZE

SIZE: 600x1200mm/24”x48”

SURFACE: Anti-slip + Shiny

Grey

Y12693







PACKING

Weight shown here may slightly vary depending on the production









Size Formate	Thickness Espesor	Box Caja			Pallet Paleta			Container/20' 24000Kg	Container/20' 27000Kg
cm	mm	pieces	m²	kg	boxes	m²	kg	m²/ sq.m	m²/ sq.m
60x60	9.5	4	1.44	30	40	57.6	1220	1127.52	1271.52
80x80	10	3	1.92	45	32	61.44	1460	1002.24	1130.88
60x120	11	2	1.44	35	56	80.64	1980	974.88	1097.28
inch	inch	units	ft²	lb	boxes	ft²	lb	ft²	ft²
23 5/8 x23 5/8	3/8	4	15.50	66.14	40	620.00	2689.64	12136.52	13686.53
31 1/2 x 31 1/2	3/8	3	20.67	99.21	32	661.33	3218.75	10788.02	12172.69
23 5/8 x 47 1/4	7/16	2	15.50	77.16	56	868.00	4365.15	10493.52	11811.02

TECHNICAL FEATURES

This chart is for tiles with water absorptioin less than 0.5%, which is classified as impervious

Technical features		Standard	Standard requirement	Average value
	Length and width	ISO 10545–2	± 0.6%	± 0.3%
	Thickness		± 5%	± 2%
	Straightness of sides		± 0.5%	± 0.2%
	Rectangularity		± 0.5%	± 0.2%
	Surface flatness		± 0.5%	± 0.2%
	Water absorption	ISO 10545–3	≤0.5%	≤0.1%
	Breaking strength	ISO 10545–4	≥1300n	≥1500n
	Modulus of rupture		≥35N/mm²	≥39N/mm²
	Abrasion resistance	ISO 10545–6	≤175 mm²	Class 4
	Chemical resistance	ISO 10545–13	min class B	GLA
	Frost resistance	ISO 10545–12	required	Resistant
	Stain resistance	ISO 10545–14	min Class 3	Class 5
	Thermal shock resistance	ISO 10545–9	test method available	Resistant

This chart is for tiles with water absorption between 0.5% and 3%, which is classified as vitreous

Technical features		Standard	Standard requirement	Average value
	Length and width	GB/T 3810.2	± 0.6%	± 0.3%
	Thickness		± 5%	± 2%
	Straightness of sides		± 0.5%	± 0.3%
	Rectangularity		± 0.5%	± 0.3%
	Surface flatness		± 0.5%	± 0.3%
	Water absorption	GB/T 3810.3	0.5% < E ≤3%	E<1.8%
	Breaking strength	GB/T 3810.4	≥1100n	≥1500n
	Modulus of rupture		≥30N/mm²	≥35N/mm²
	Abrasion resistance	GB/T 3810.6	≤175 mm²	Class 4
	Chemical resistance	GB/T 3810.13	indicated by the manufacturer	GLA
	Frost resistance	GB/T 3810.12	required	Resistant
	Stain resistance	GB/T 3810.14	min Class 3	Class 5
	Thermal shock resistance	GB/T 3810.9	test method available	Resistant



Made in China

MITO Ceramics belongs to Meiyitao (Fujian) High-tech Construction Materials Co., Ltd
www.mitoceramics.com | hello@mitoceramics.com | +86 13615963688

