


MODEL: B39-6

NO.: 301020003-00046

Container Color	
■	Cover:Black C
□	Bottom:White C

Plane Chart:

Unit:mm Terminal type:G1

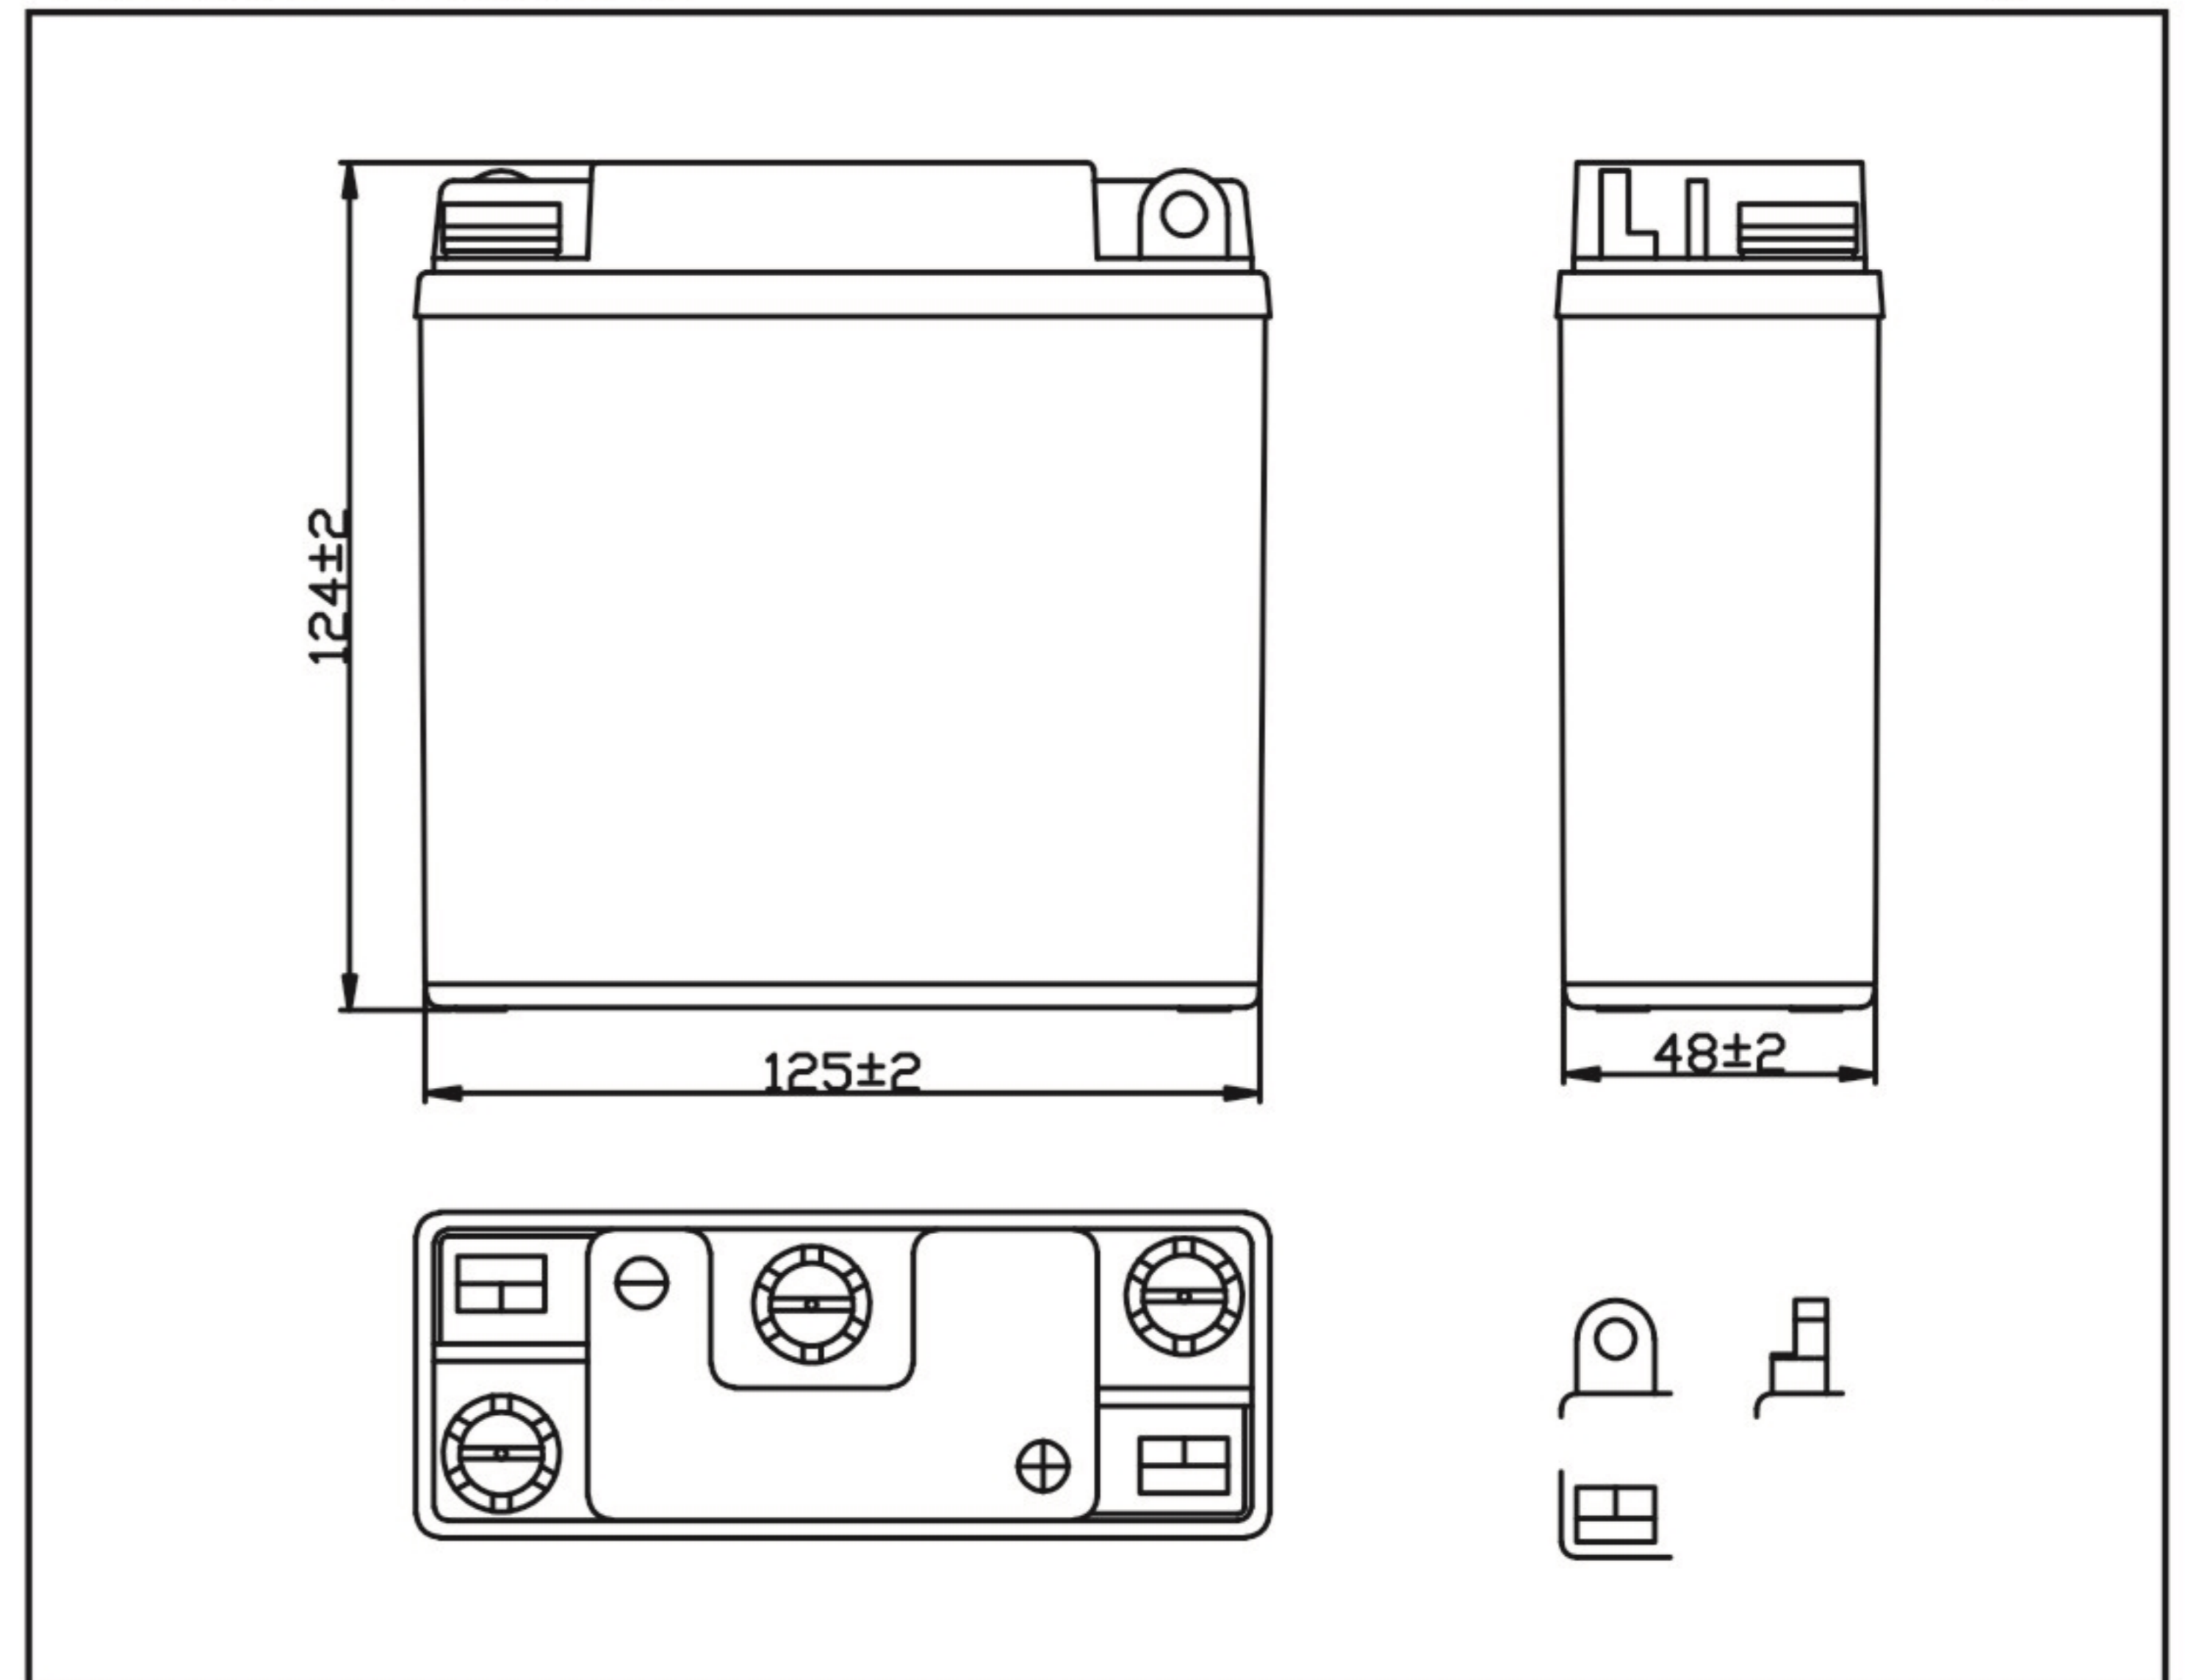

Parts:


Executed Standard: JISD 5302-2004

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safety Valve	Explosion Plate	Way of Sealing
PP	PP	Pb	PbO ₂	Pb	PE/Compound Fibre	dilute sulphuric acid	Rubber	PP	Heat Sealing


Parameter Chart:

Volts	6V		
Capacity (25°C)	10 hours rate		7Ah
Appx.Dimension (mm)	L±2		125
	W±2		48
	H±2		124
Storage Status	Dry		
Weight (Approx)	0.95Kg	Weight w/ Acid	0.47Kg
Retention of Charge Storage @25 °C			
1 month	97%	Directly Mounted	
3 month	90%	Directly Mounted	
6 month	80%	Constant Volts:7.2V Limit Current:1.4A Charging Hours:2-3H	
12 month	40%	Constant Volts:7.2V Limit Current:1.4A Charging Hours:4-6H	
CCA	Factory Standard (-10°C)	Factory Standard (-18°C)	
Discharging Current	-	-	

Discharge Current 25°C

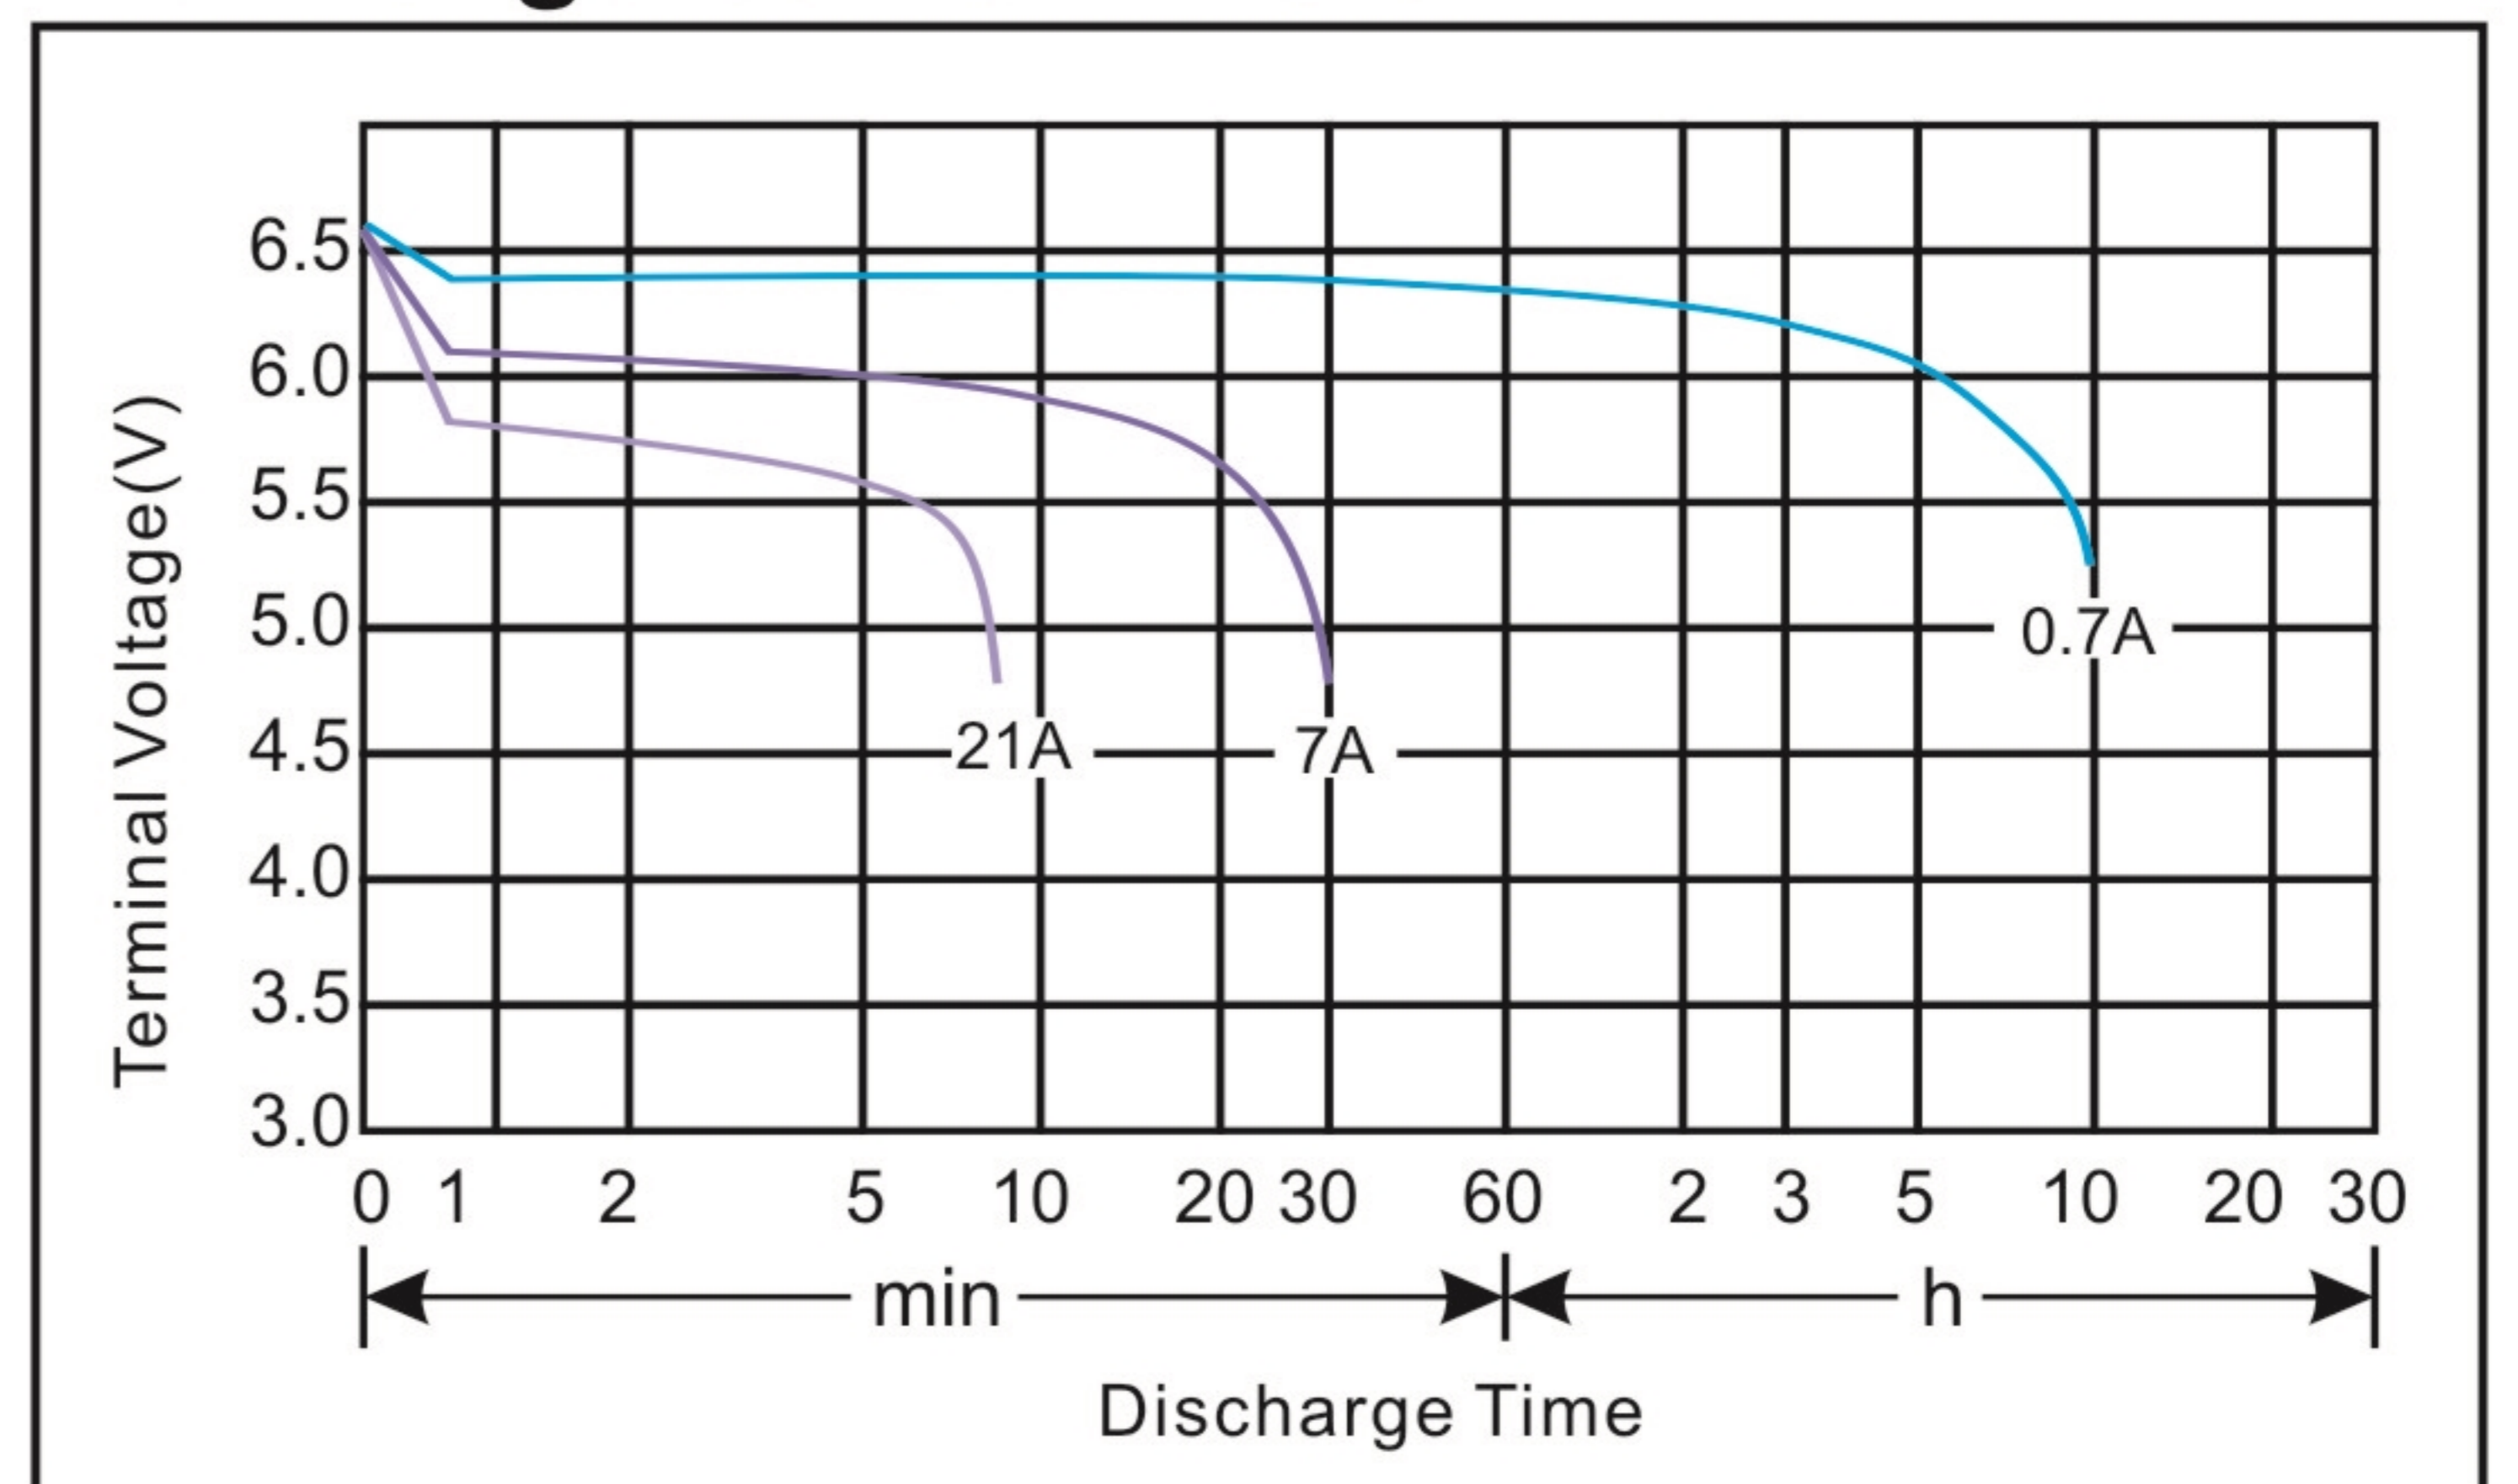

Residual Capacity

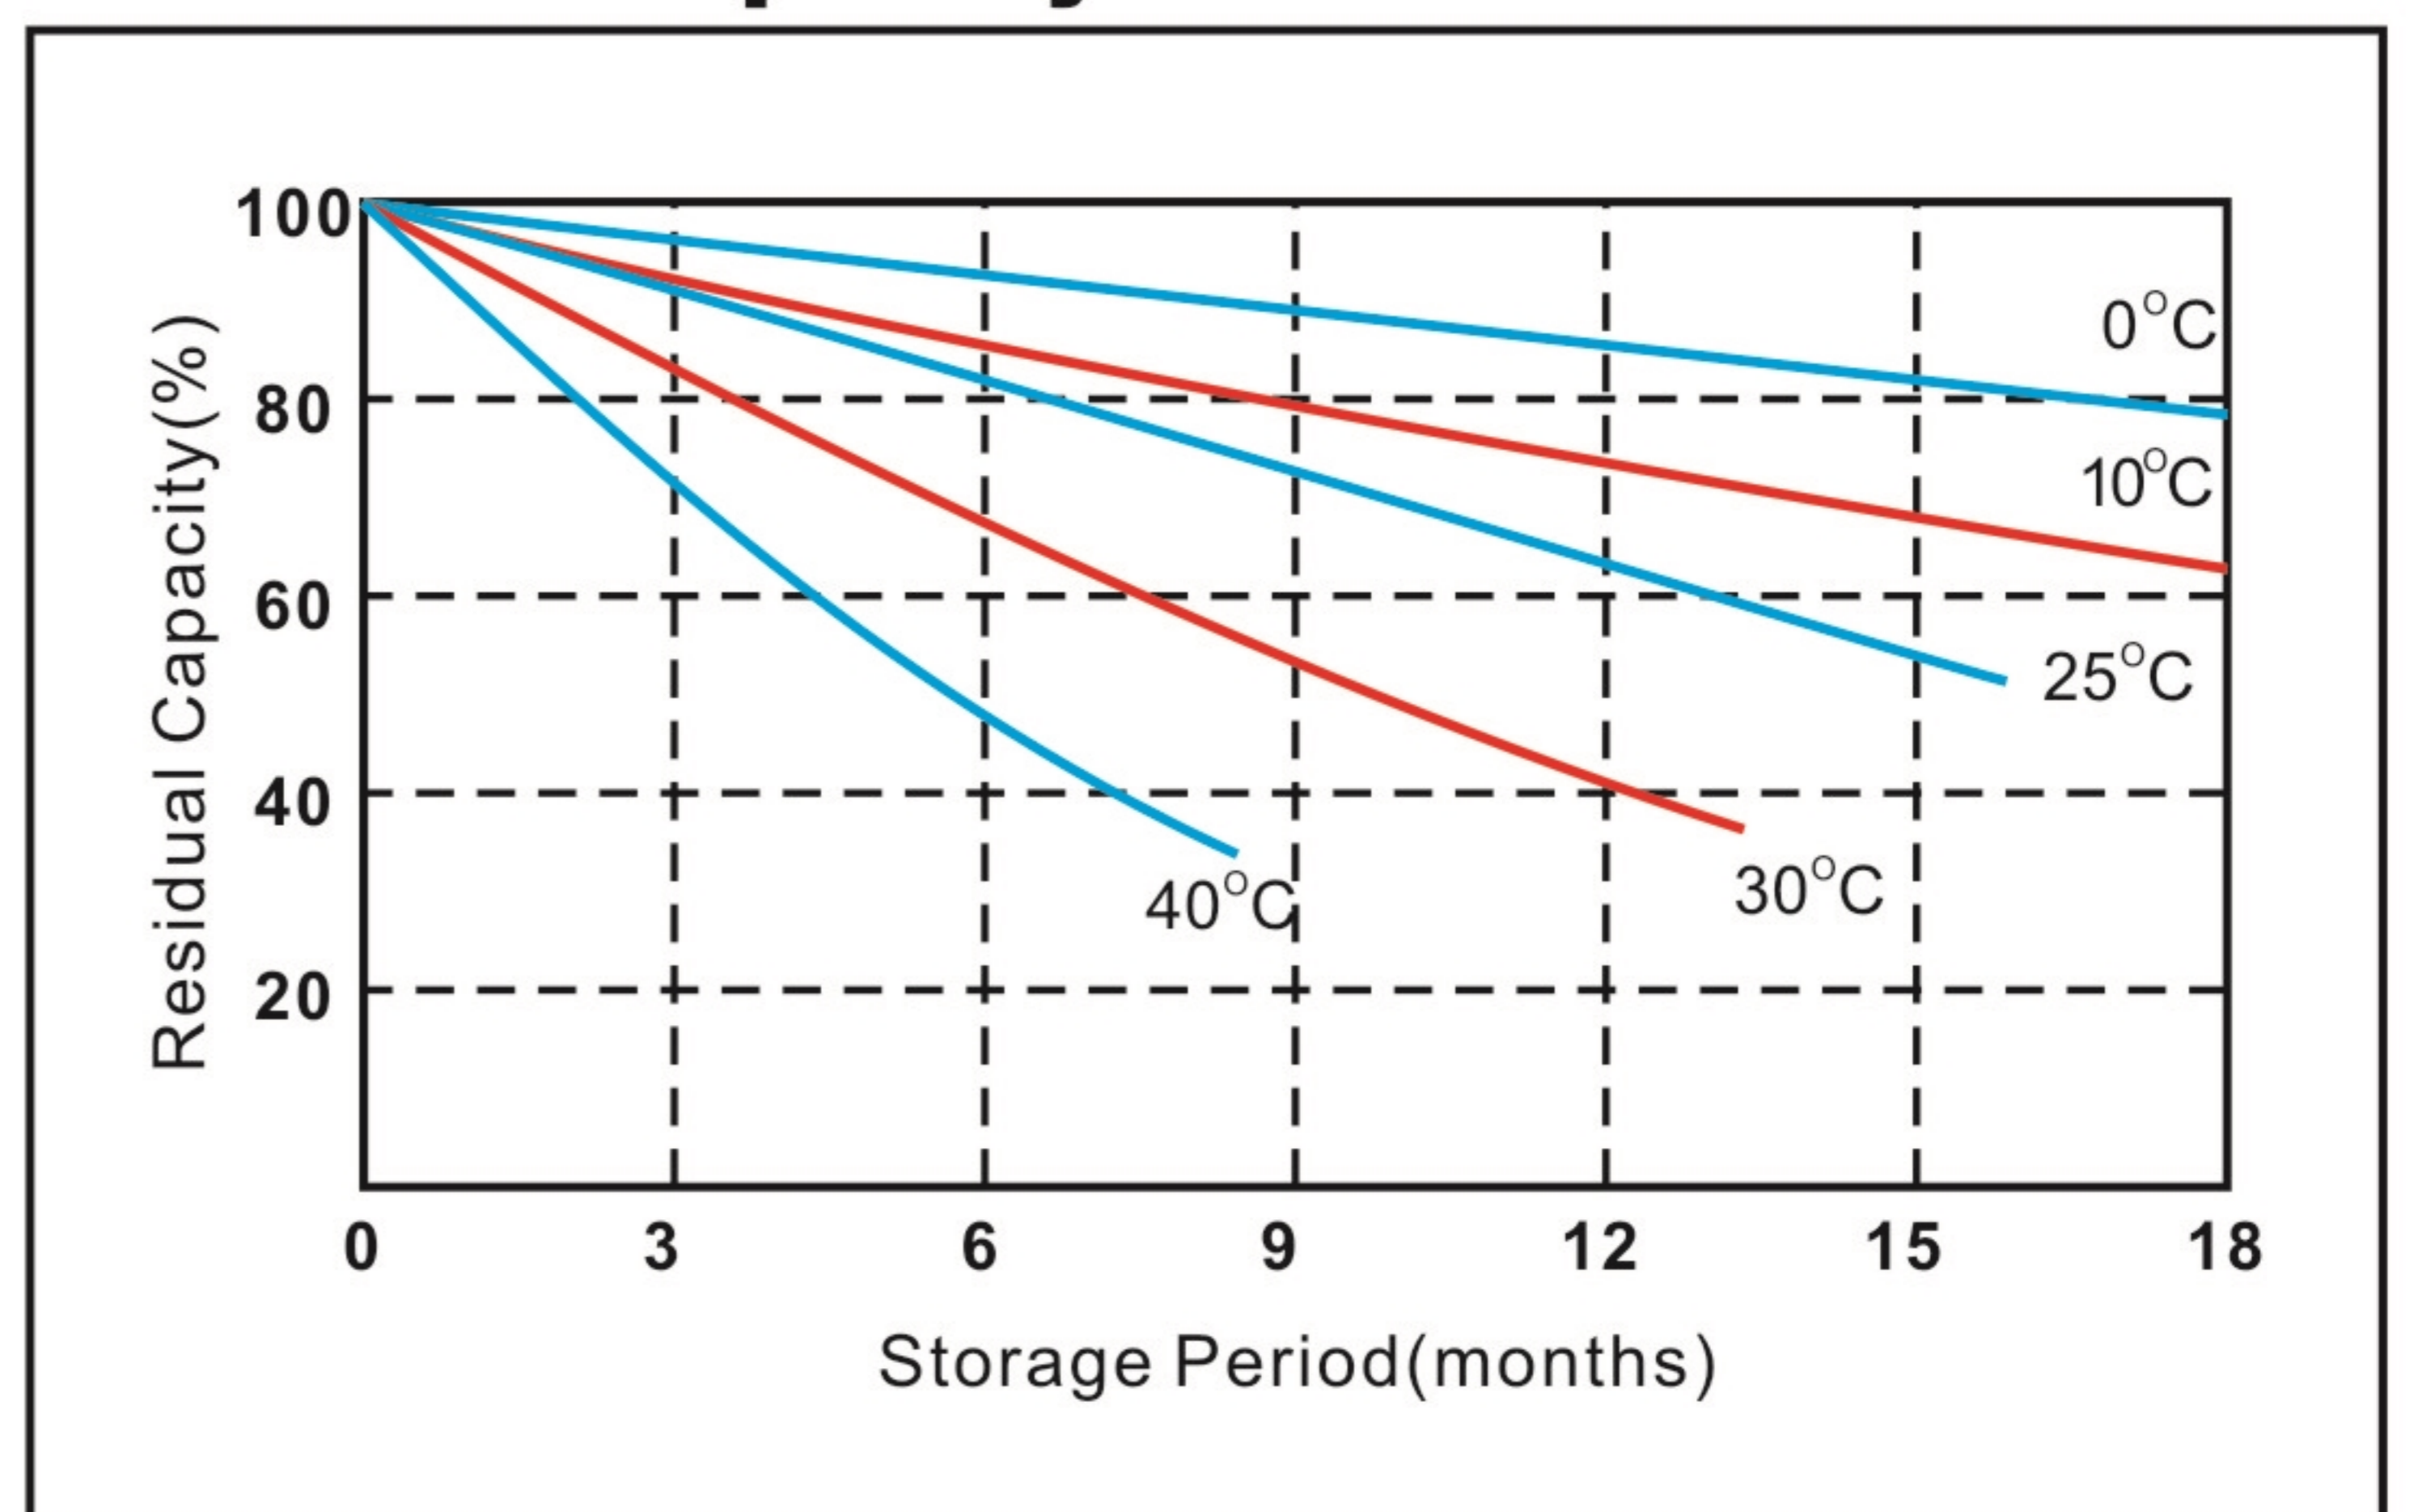

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

★The different item No. of battery can be developed according to the customer's demand.