



CHARACTERISTIC OF FLOODED RECHARGEABLE LEAD ACID BATTERY


MODEL: 6N12A-2D

NO.:301020003-00058



Plane Chart:

Unit:mm Terminal type:G1

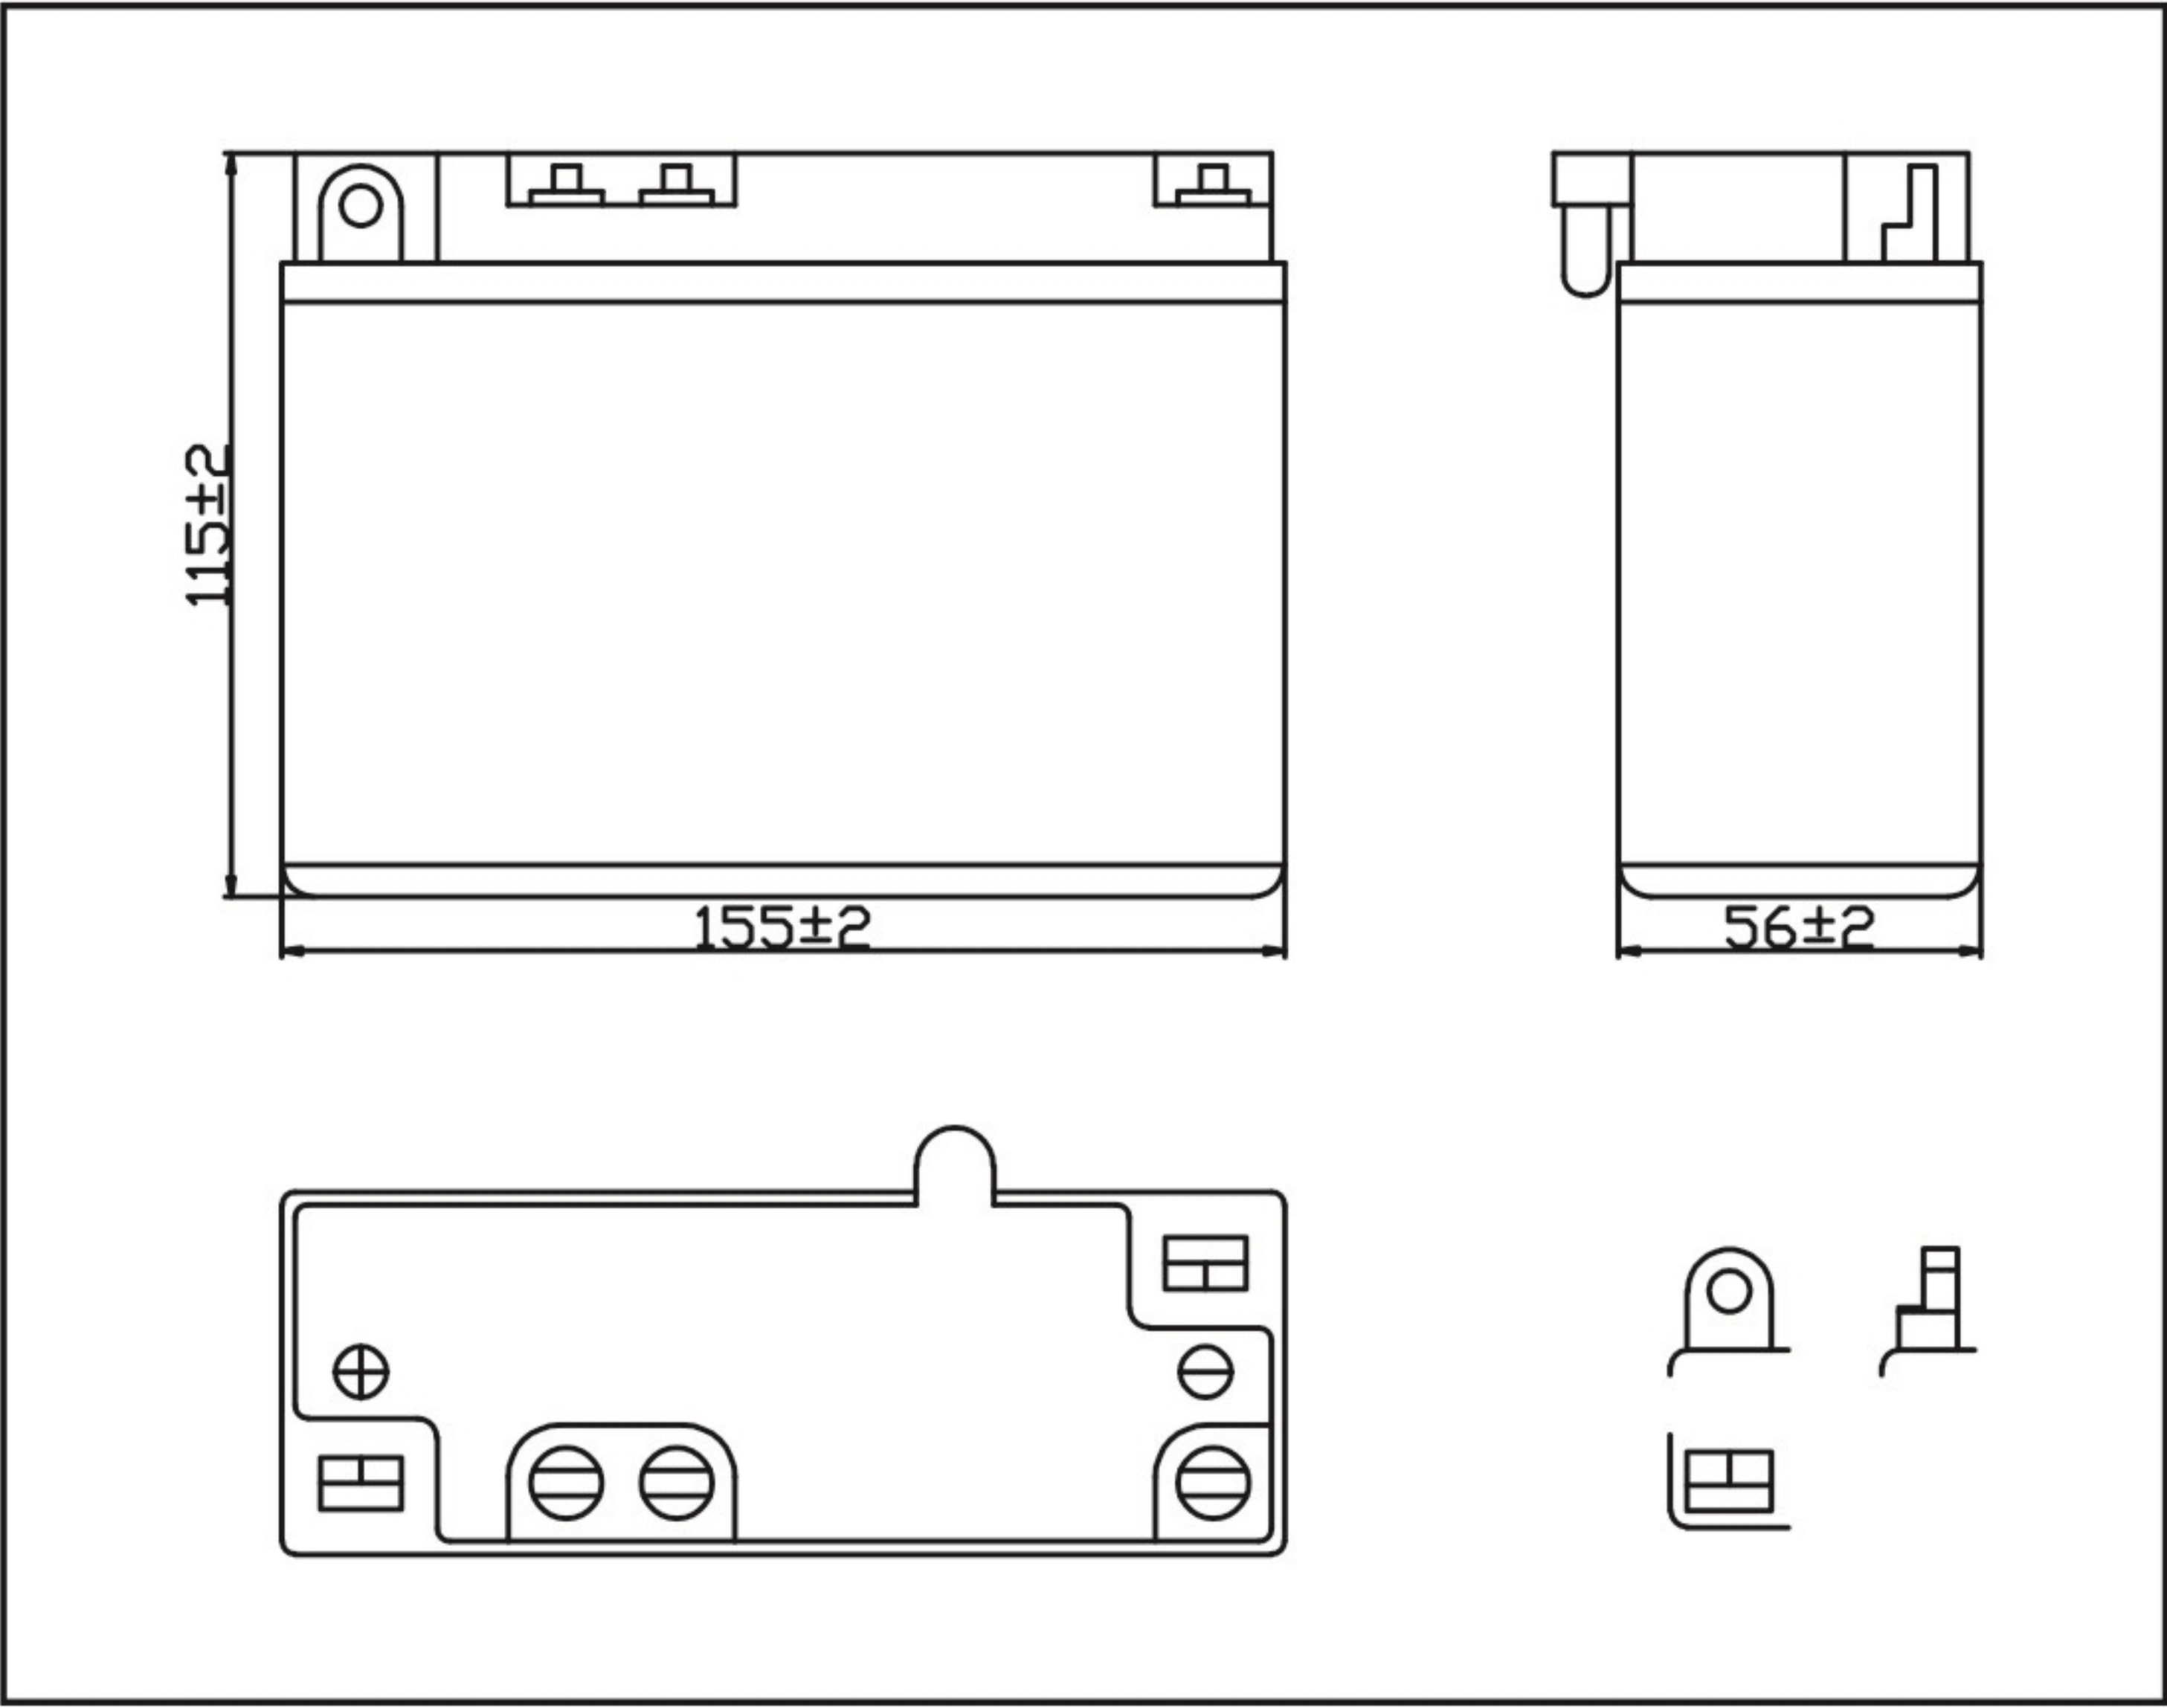

Parts:


Executed Standard:JISD 5302-2004

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safty Valve	Explosion Plate	Way of Sealing
PP	PP	Pb	PbO <sub>2</sub>	Pb	PE/ Compound Fibre	dilute sulphuric acid	Rubber	PP	Heat Sealing


Parameter Chart:

Volts		6V		
Capacity (25°C)		10 hours rate		12Ah
Appx.Dimension (mm)	L±2		155	
	W±2		56	
	H±2		115	
Storage Status		Dry		
Weight (Approx)		1.14Kg	Weight w/ Acid	0.8Kg
Retention of Charge Storage @25°C				
1 month	97%	Directly Mounted		
3 month	90%	Directly Mounted		
6 month	80%	Constant Volts:7.2V Limit Current:2.4A Charging Hours:2-3H		
12 month	40%	Constant Volts:7.2V Limit Current:2.4A Charging Hours:4-6H		
CCA		Factory Standard (-10° C)		Factory Standard (-18° C)
Discharging Current		—		—

Discharge Current 25°C

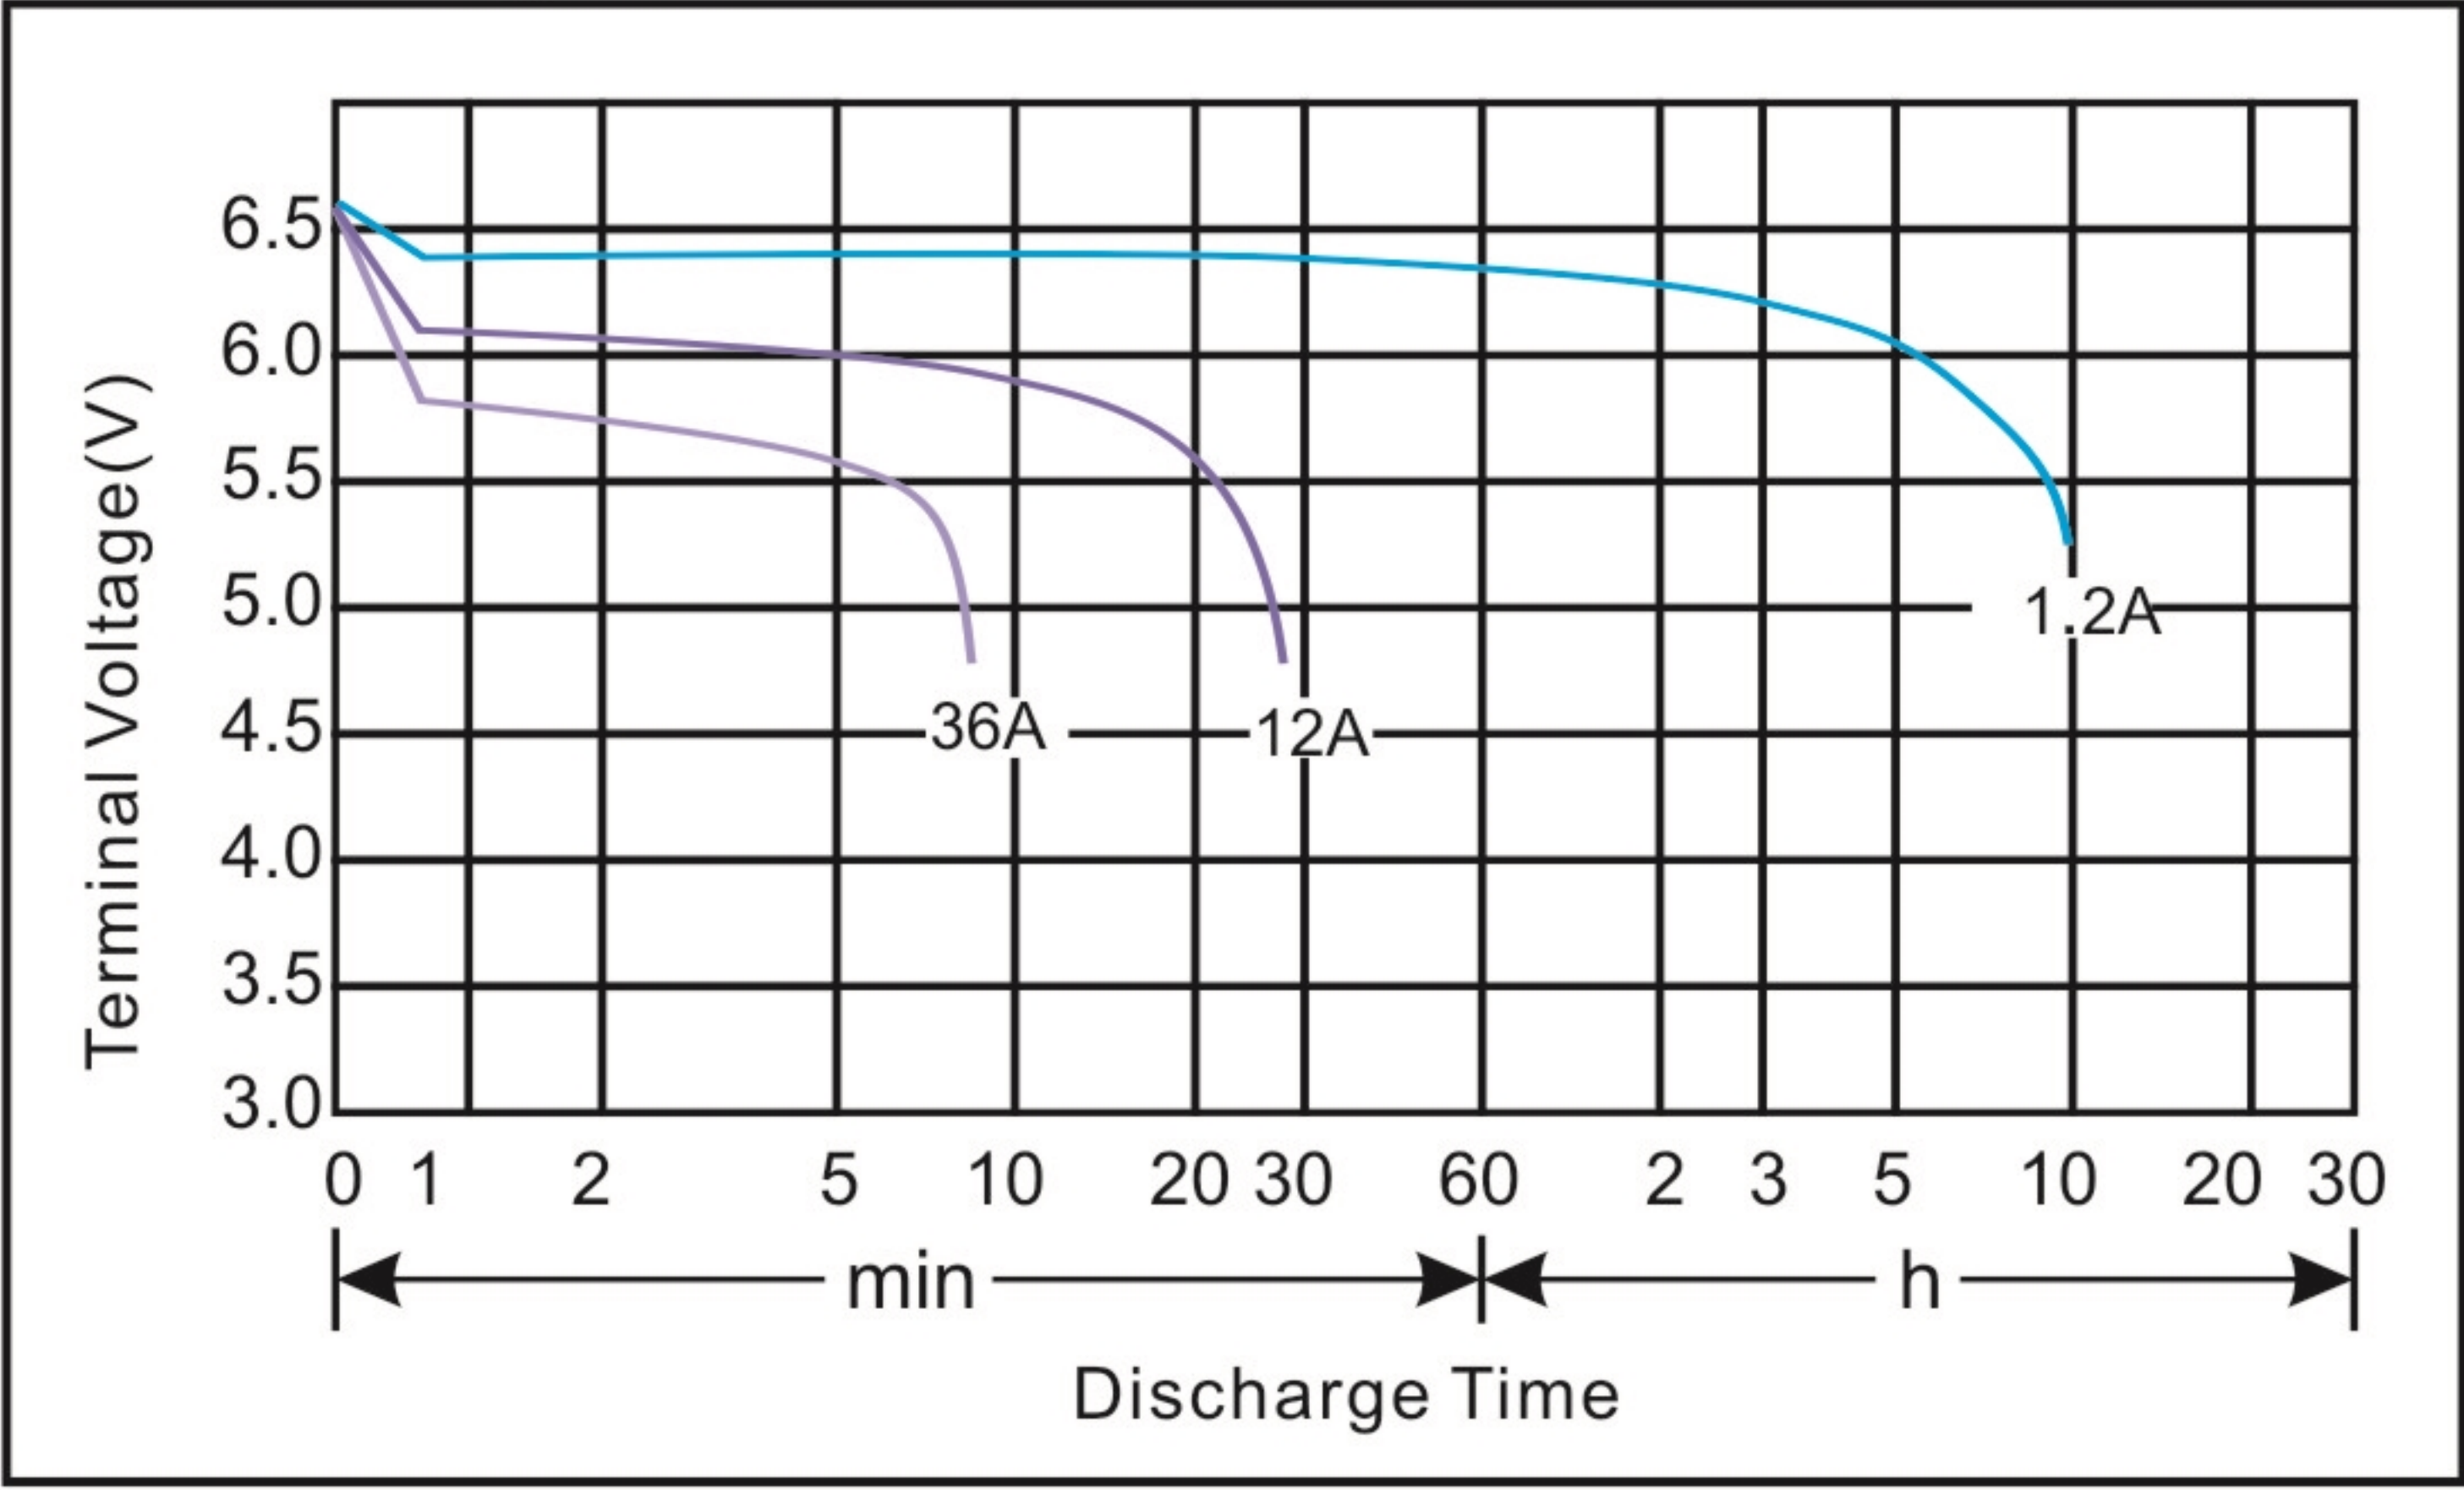

Residual Capacity

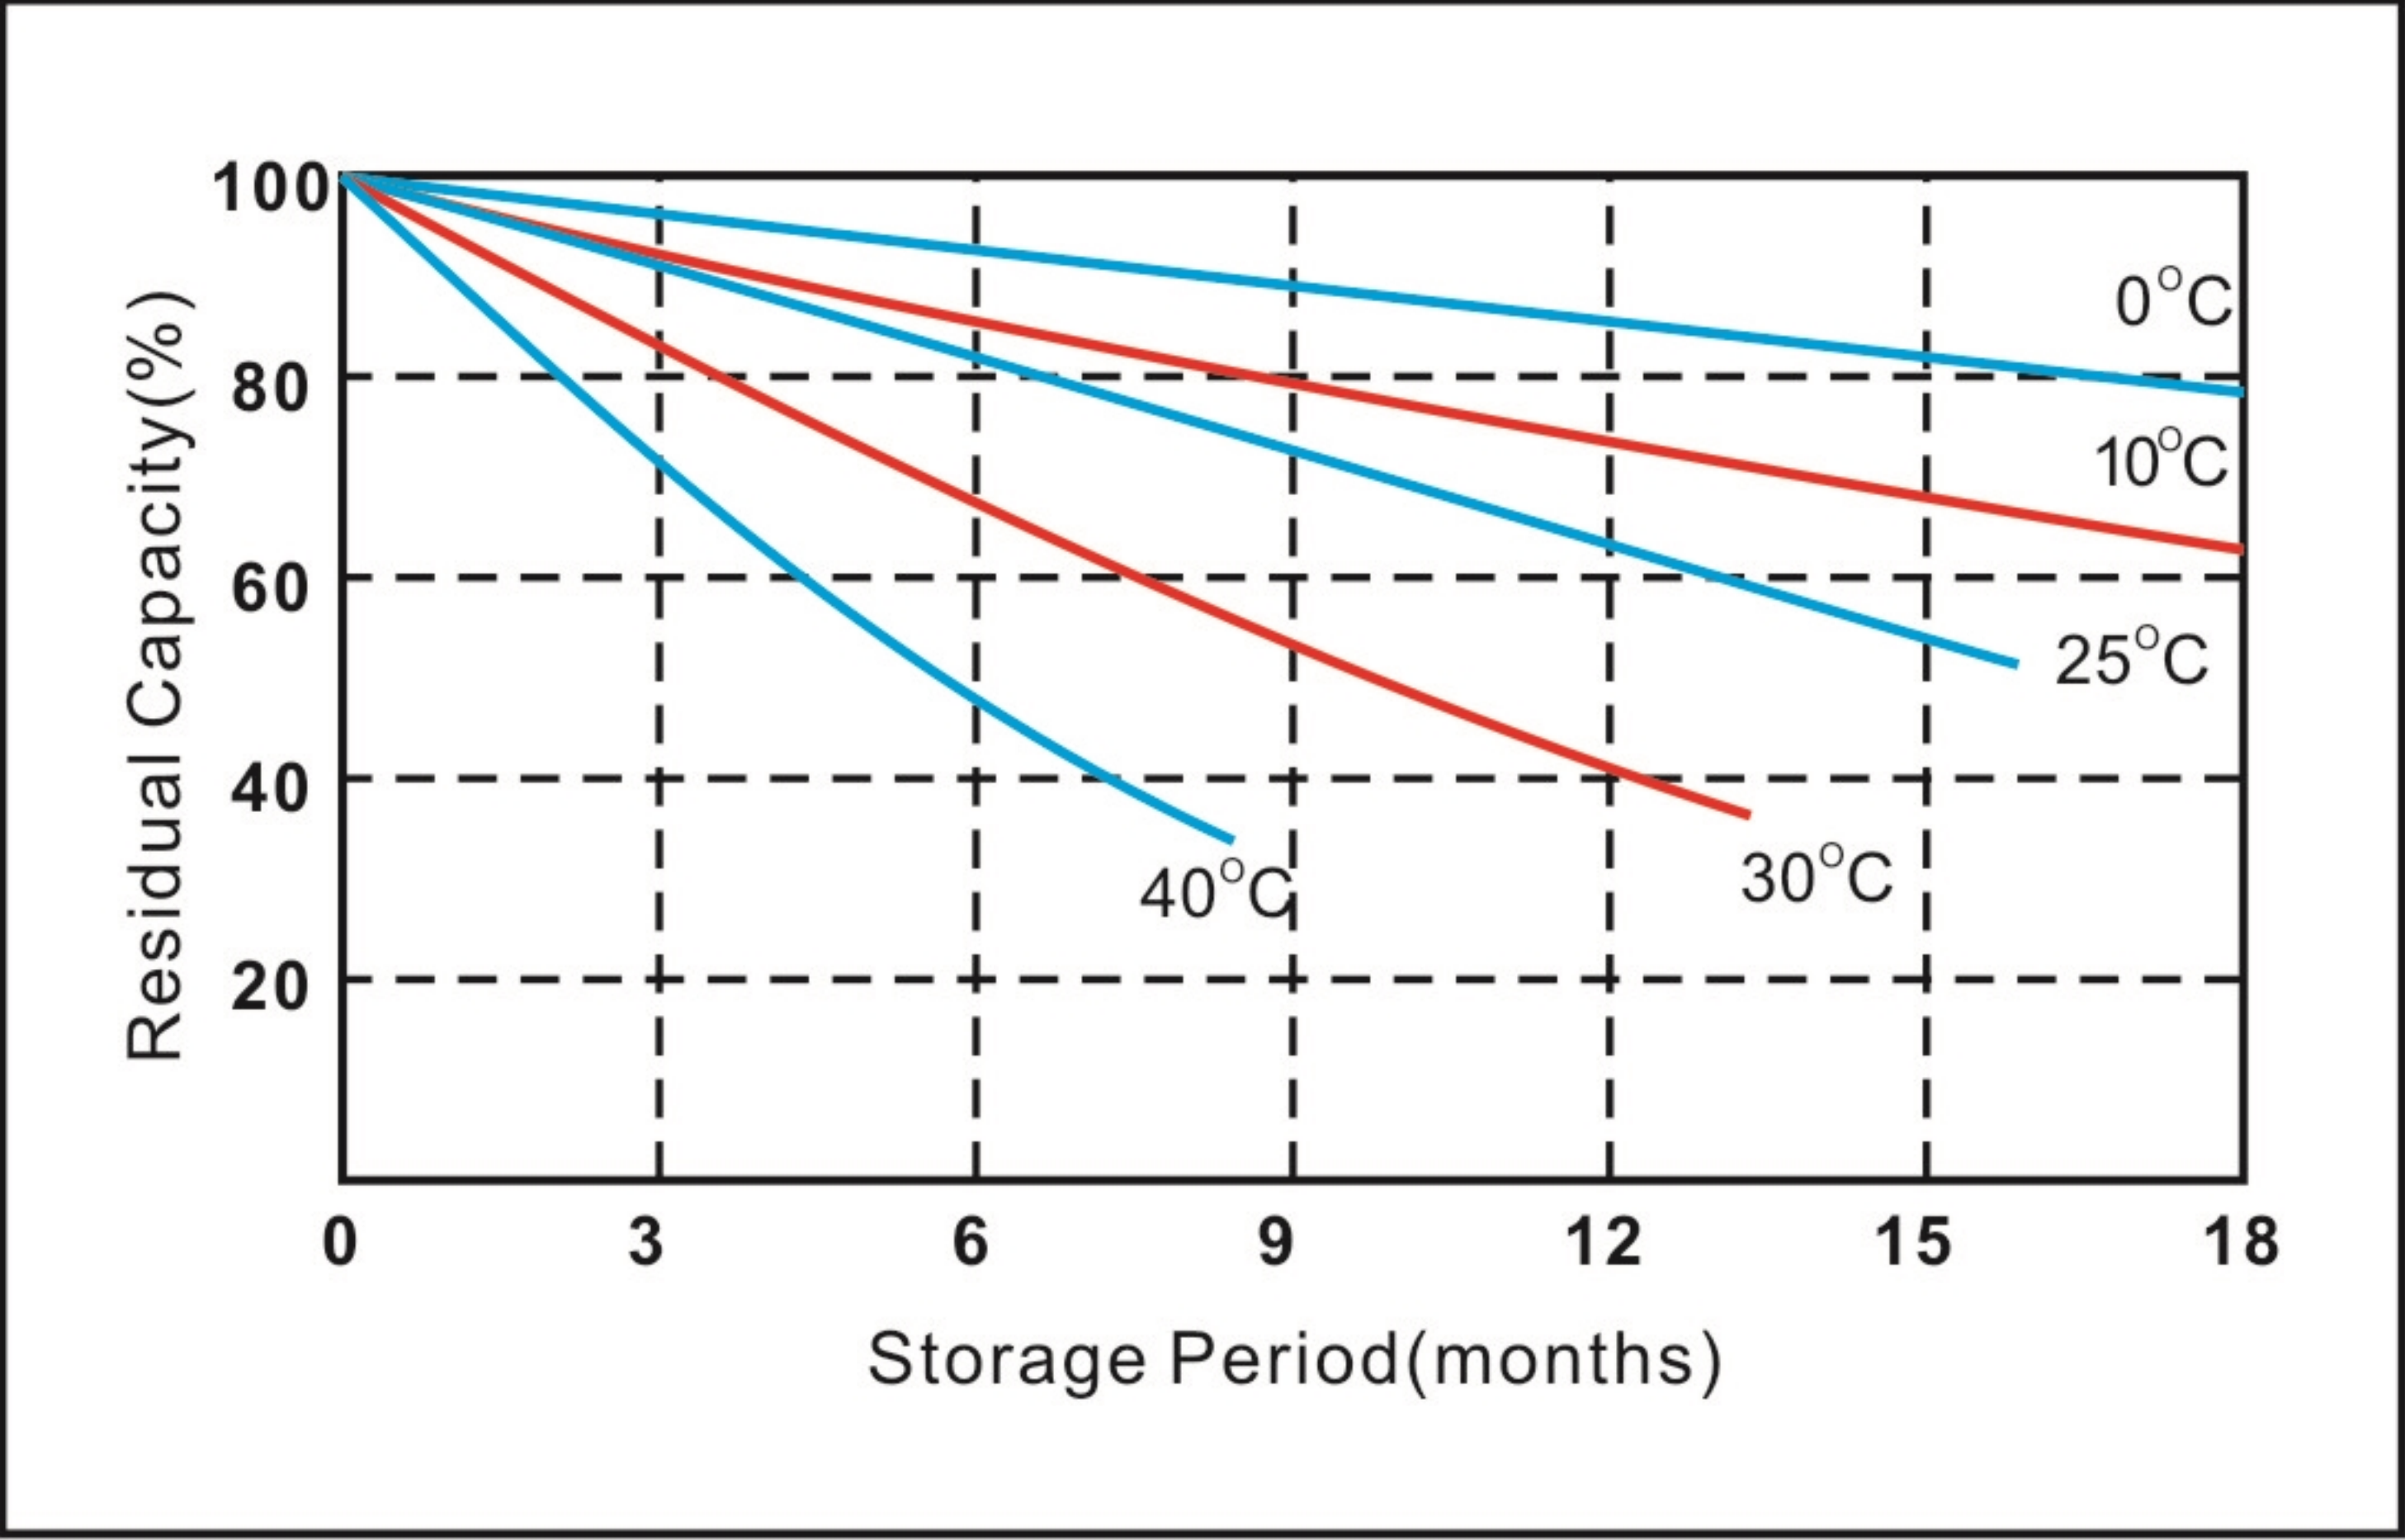

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

★The different item No. of battery can be developed according to the customer's demand.