



# CHARACTERISTIC OF FLOODED RECHARGEABLE LEAD ACID BATTERY

**MODEL: B38-6A**

**NO.:301020003-00060**

Container Color  
 ■ Cover:Black C  
 □ Bottom:White C

**Plane Chart:**

Unit:mm Terminal type:G1

**Parts:**


Executed Standard:JISD 5302-2004

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safety Valve	Explosion Plate	Way of Sealing
PP	PP	Pb	PbO <sub>2</sub>	Pb	PE/ Compound Fibre	dilute sulphuric acid	Rubber	PP	Heat Sealing


**Parameter Chart:**

Volts	6V		
Capacity (25°C)	10 hours rate		13Ah
Appx.Dimension (mm)	L±2		119
	W±2		83
	H±2		161
Storage Status	Dry		
Weight (Approx)	1.62Kg	Weight w/ Acid	0.95Kg
Retention of Charge Storage @25°C			
1 month	97%	Directly Mounted	
3 month	90%	Directly Mounted	
6 month	80%	Constant Volts:7.2V Limit Current:2.6A Charging Hours:2-3H	
12 month	40%	Constant Volts:7.2V Limit Current:2.6A Charging Hours:4-6H	
CCA	Factory Standard (-10°C)	Factory Standard (-18°C)	
Discharging Current	-	-	

**Discharge Current 25°C**

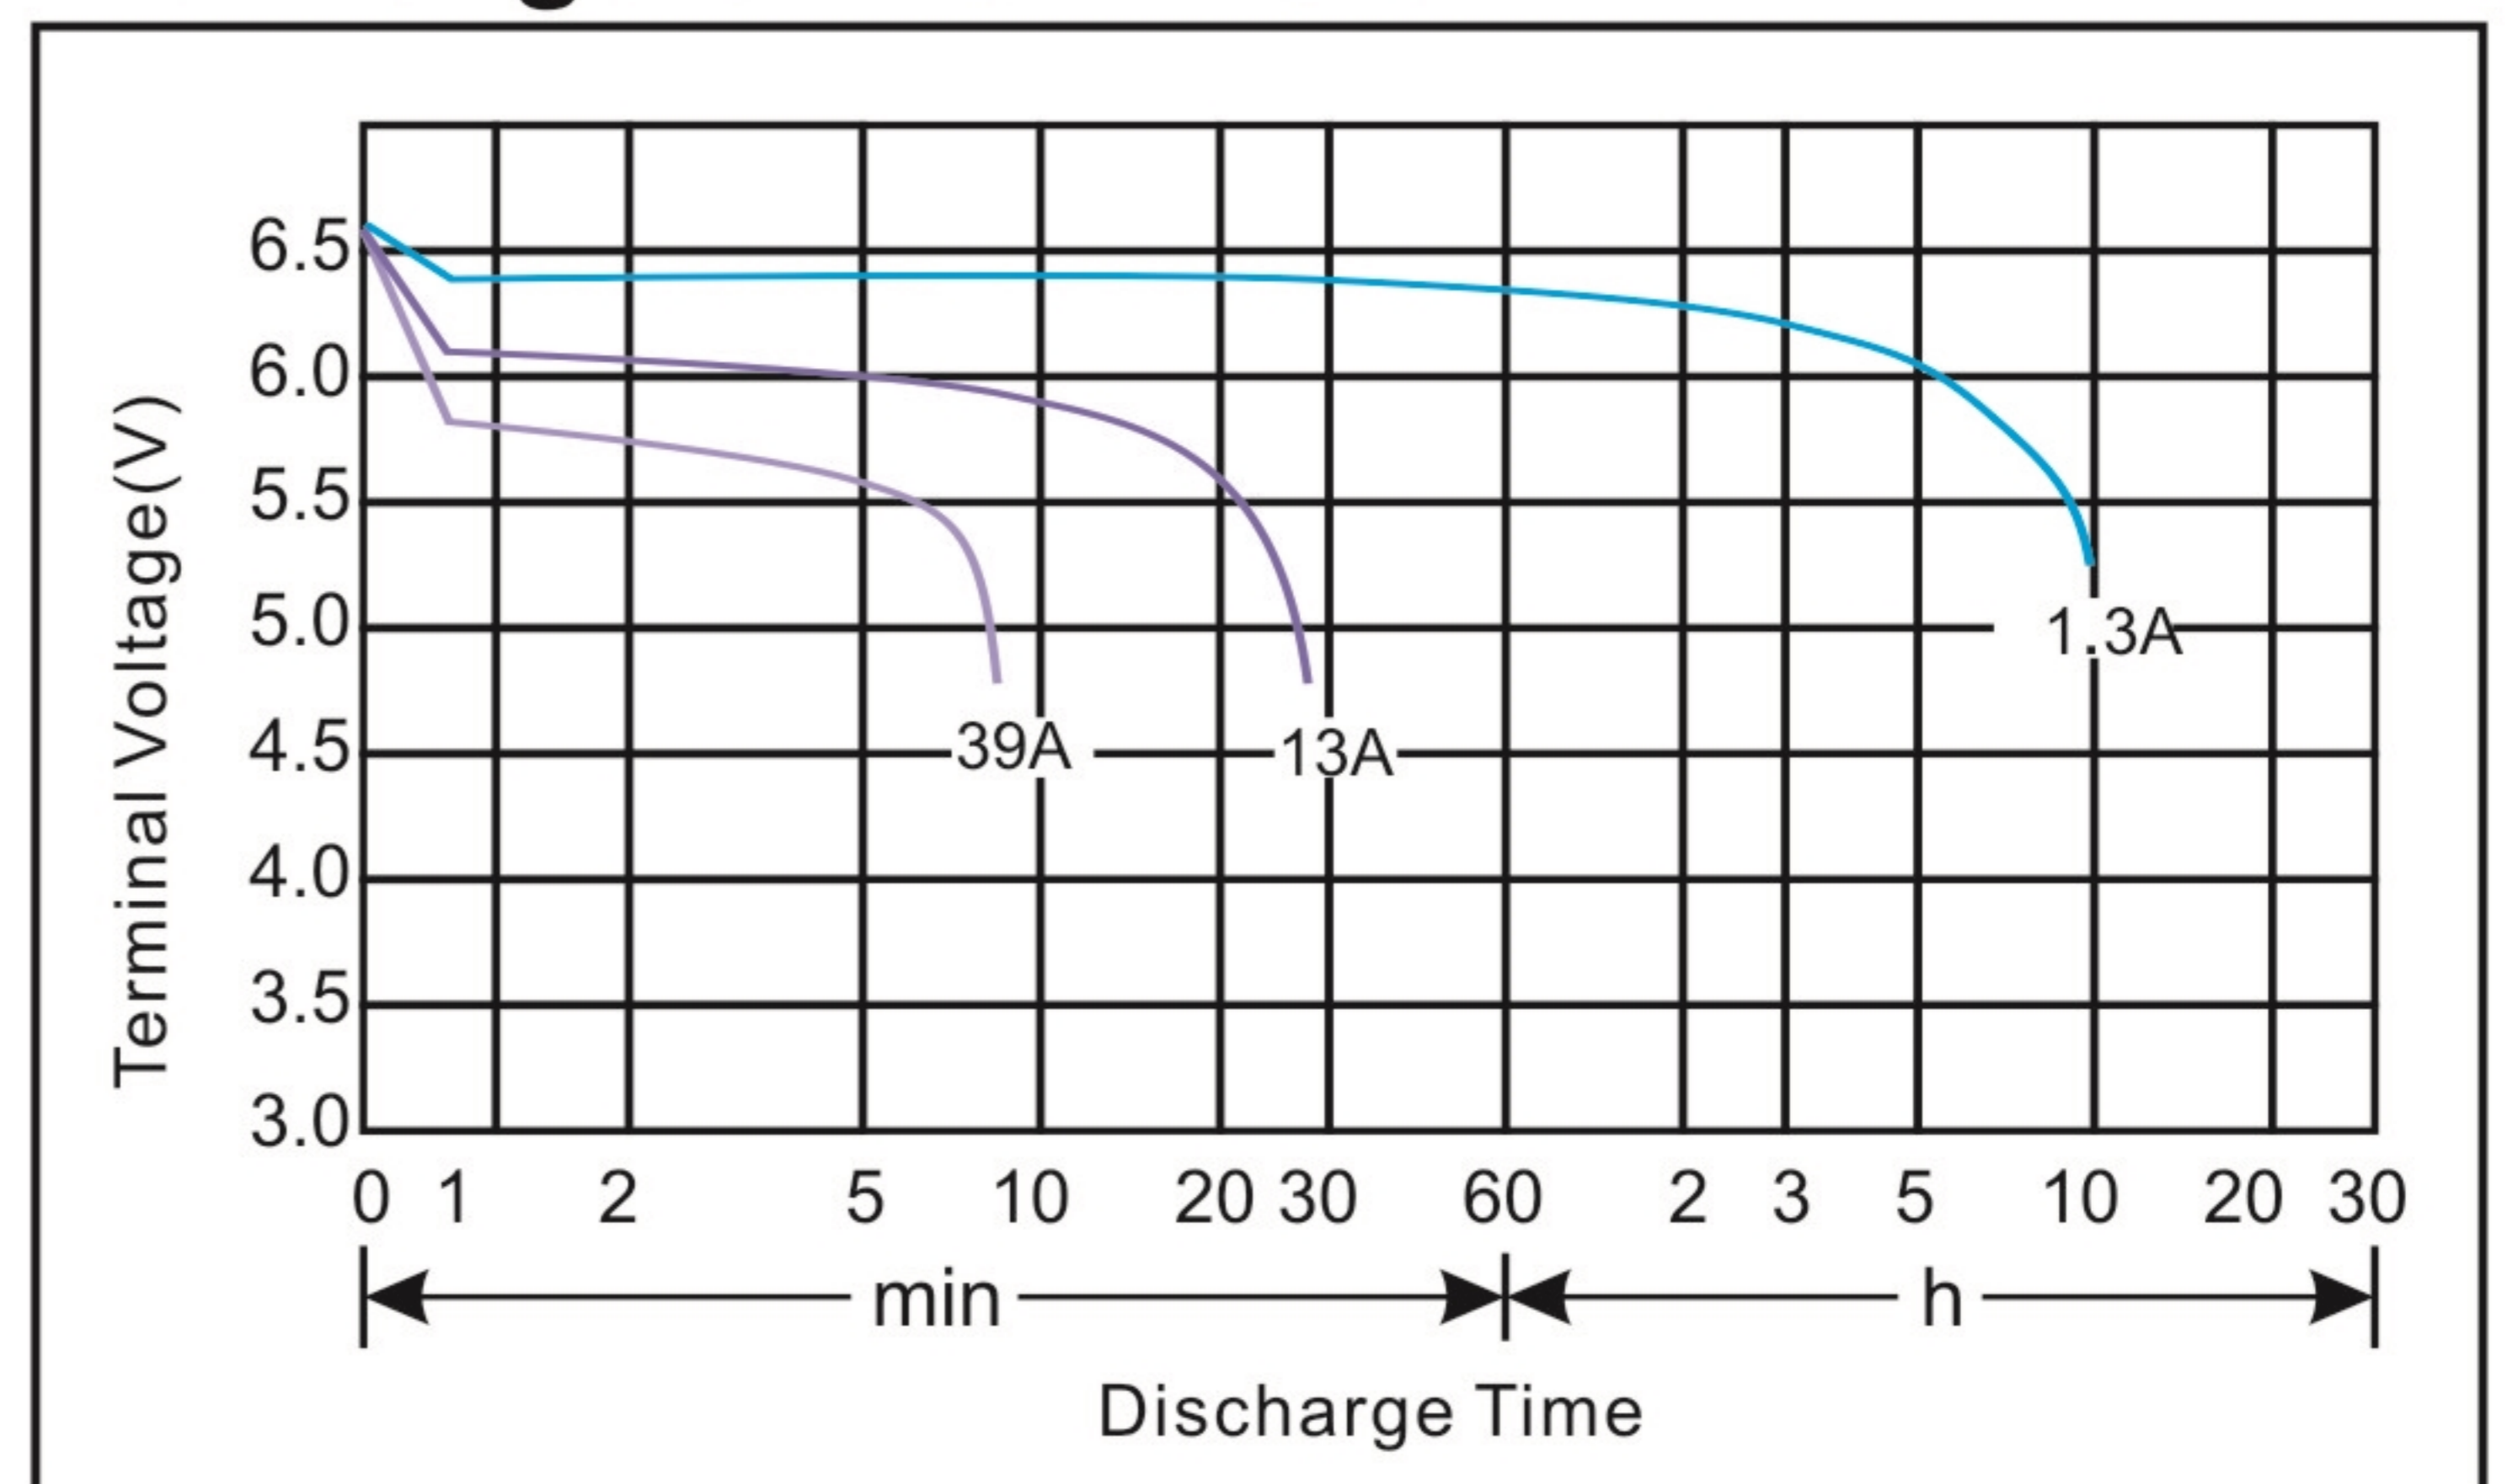

**Residual Capacity**

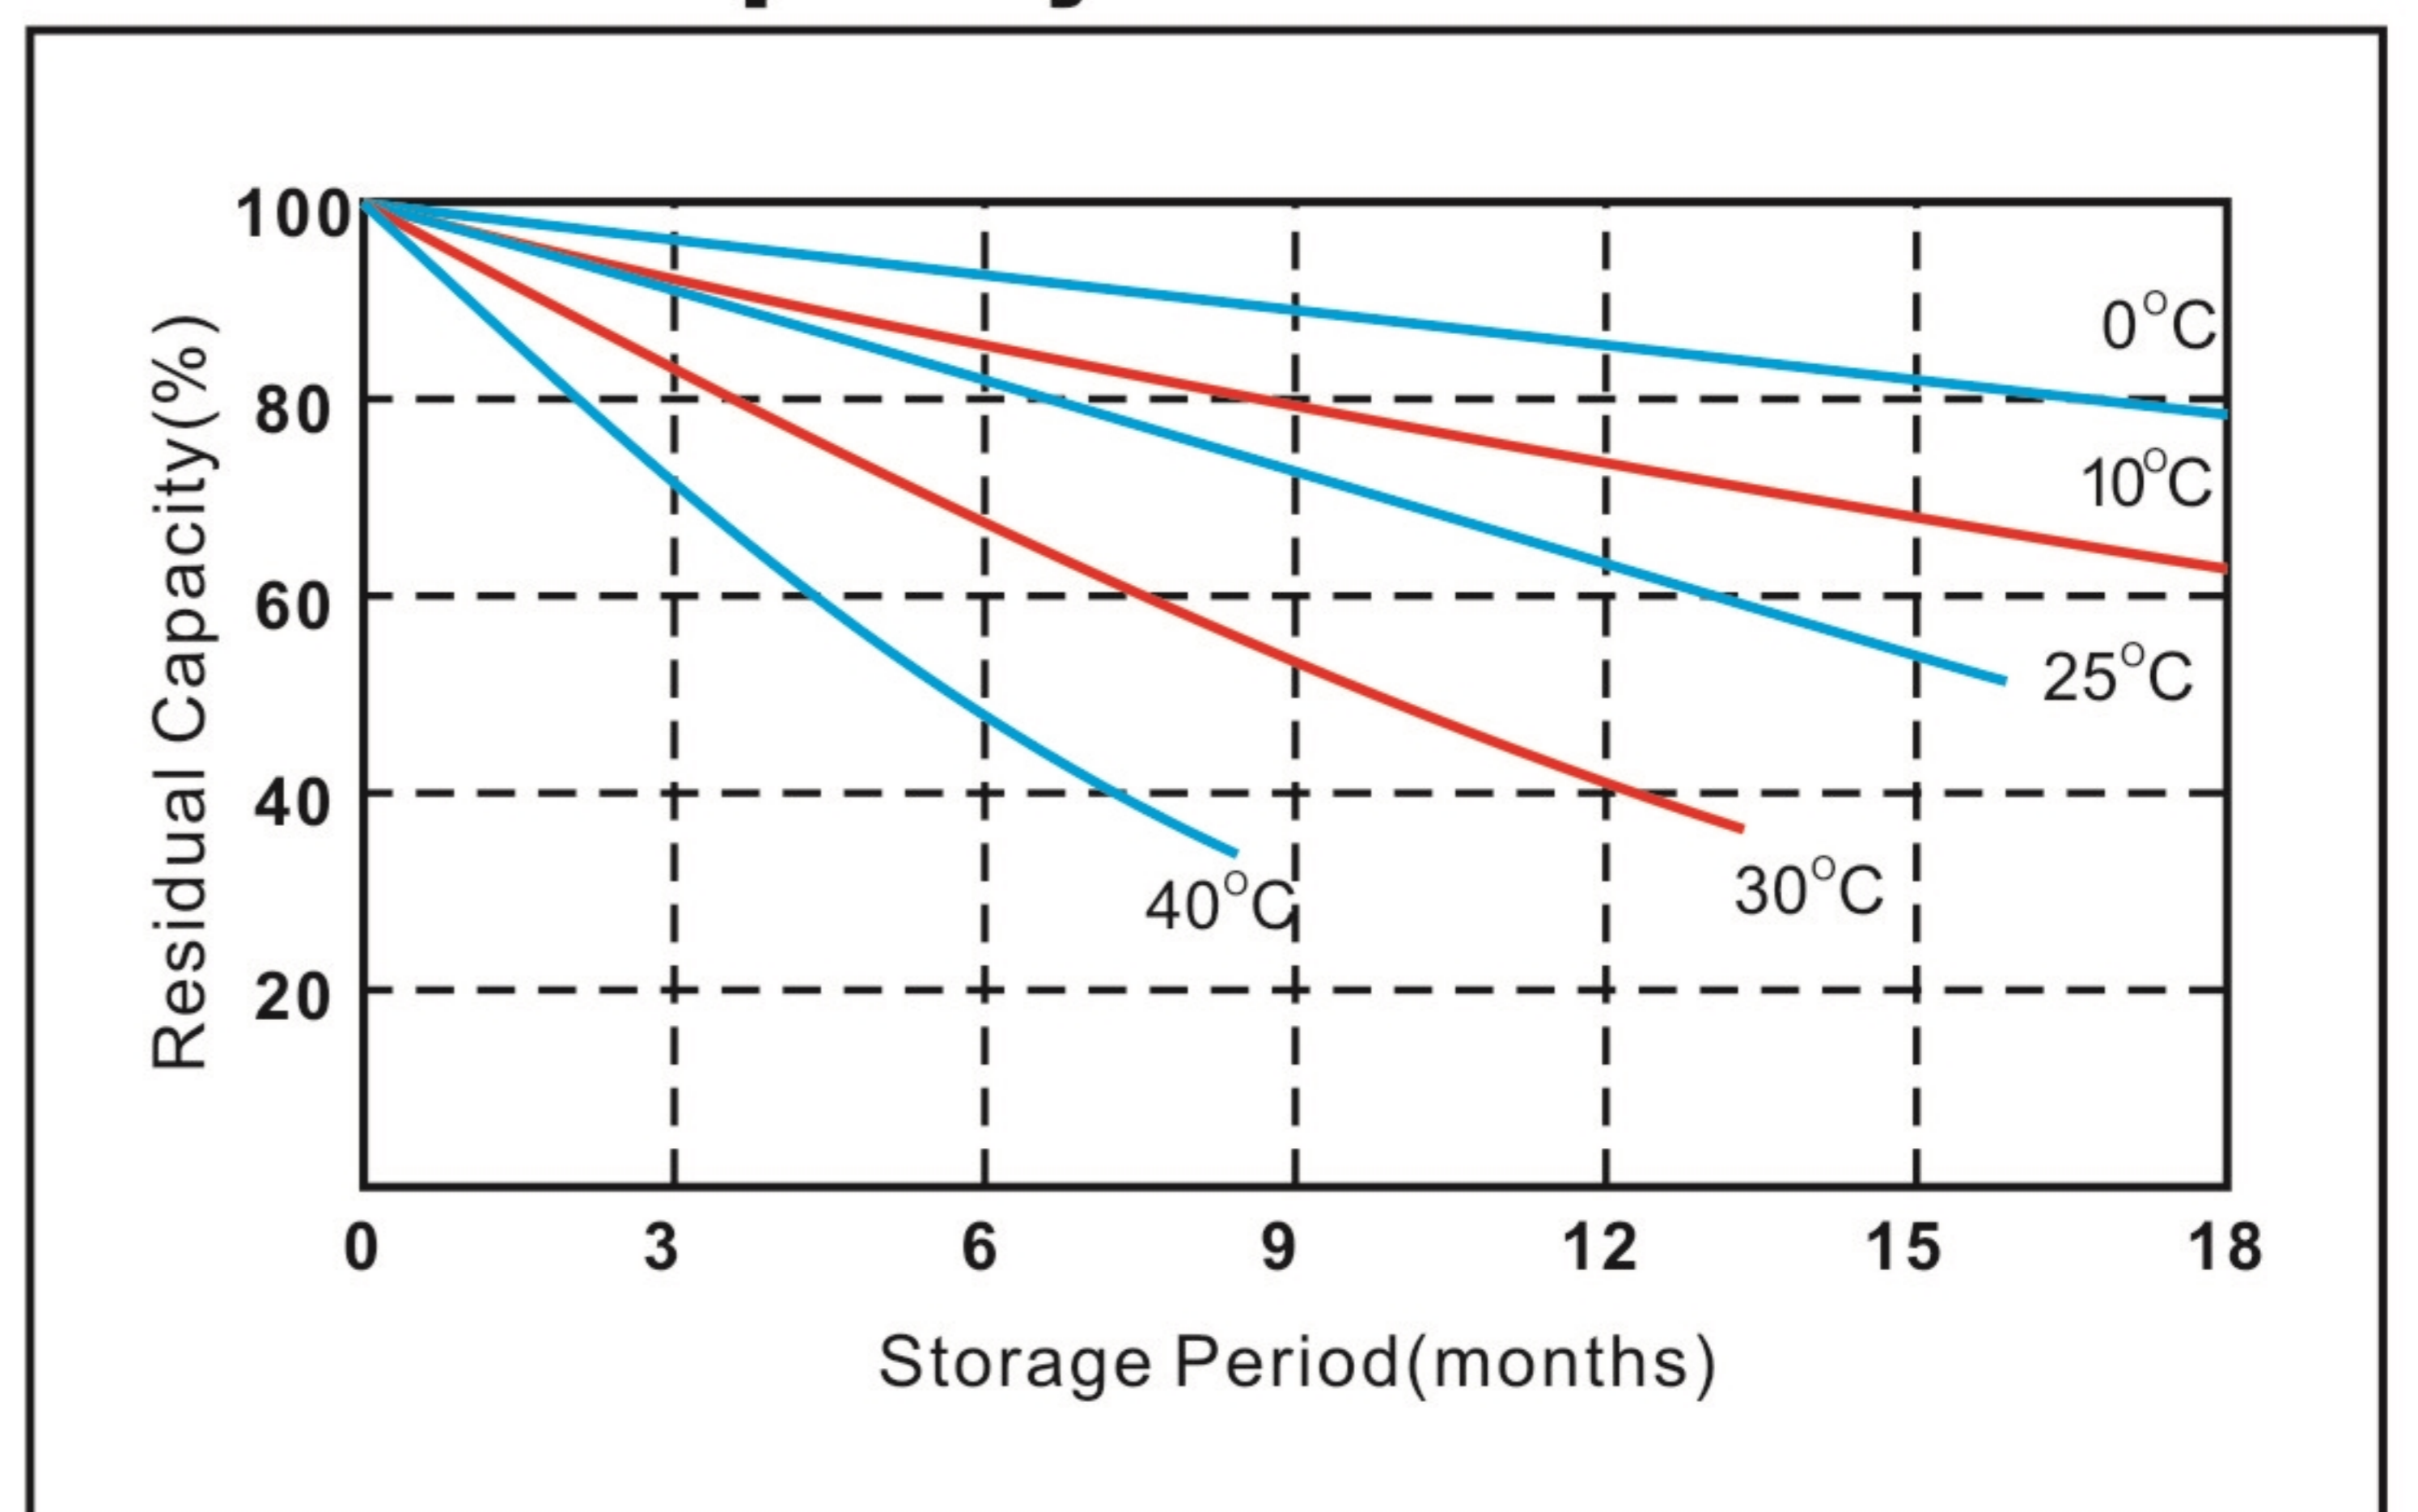

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

★The different item No. of battery can be developed according to the customer's demand.