


MODEL: UTX16L-BS(GEL)

NO.: 301040035-00104


Container Optional Color

■ Orange 021 C



Plane Chart:

Unit:(mm) Terminal type:(Z1)

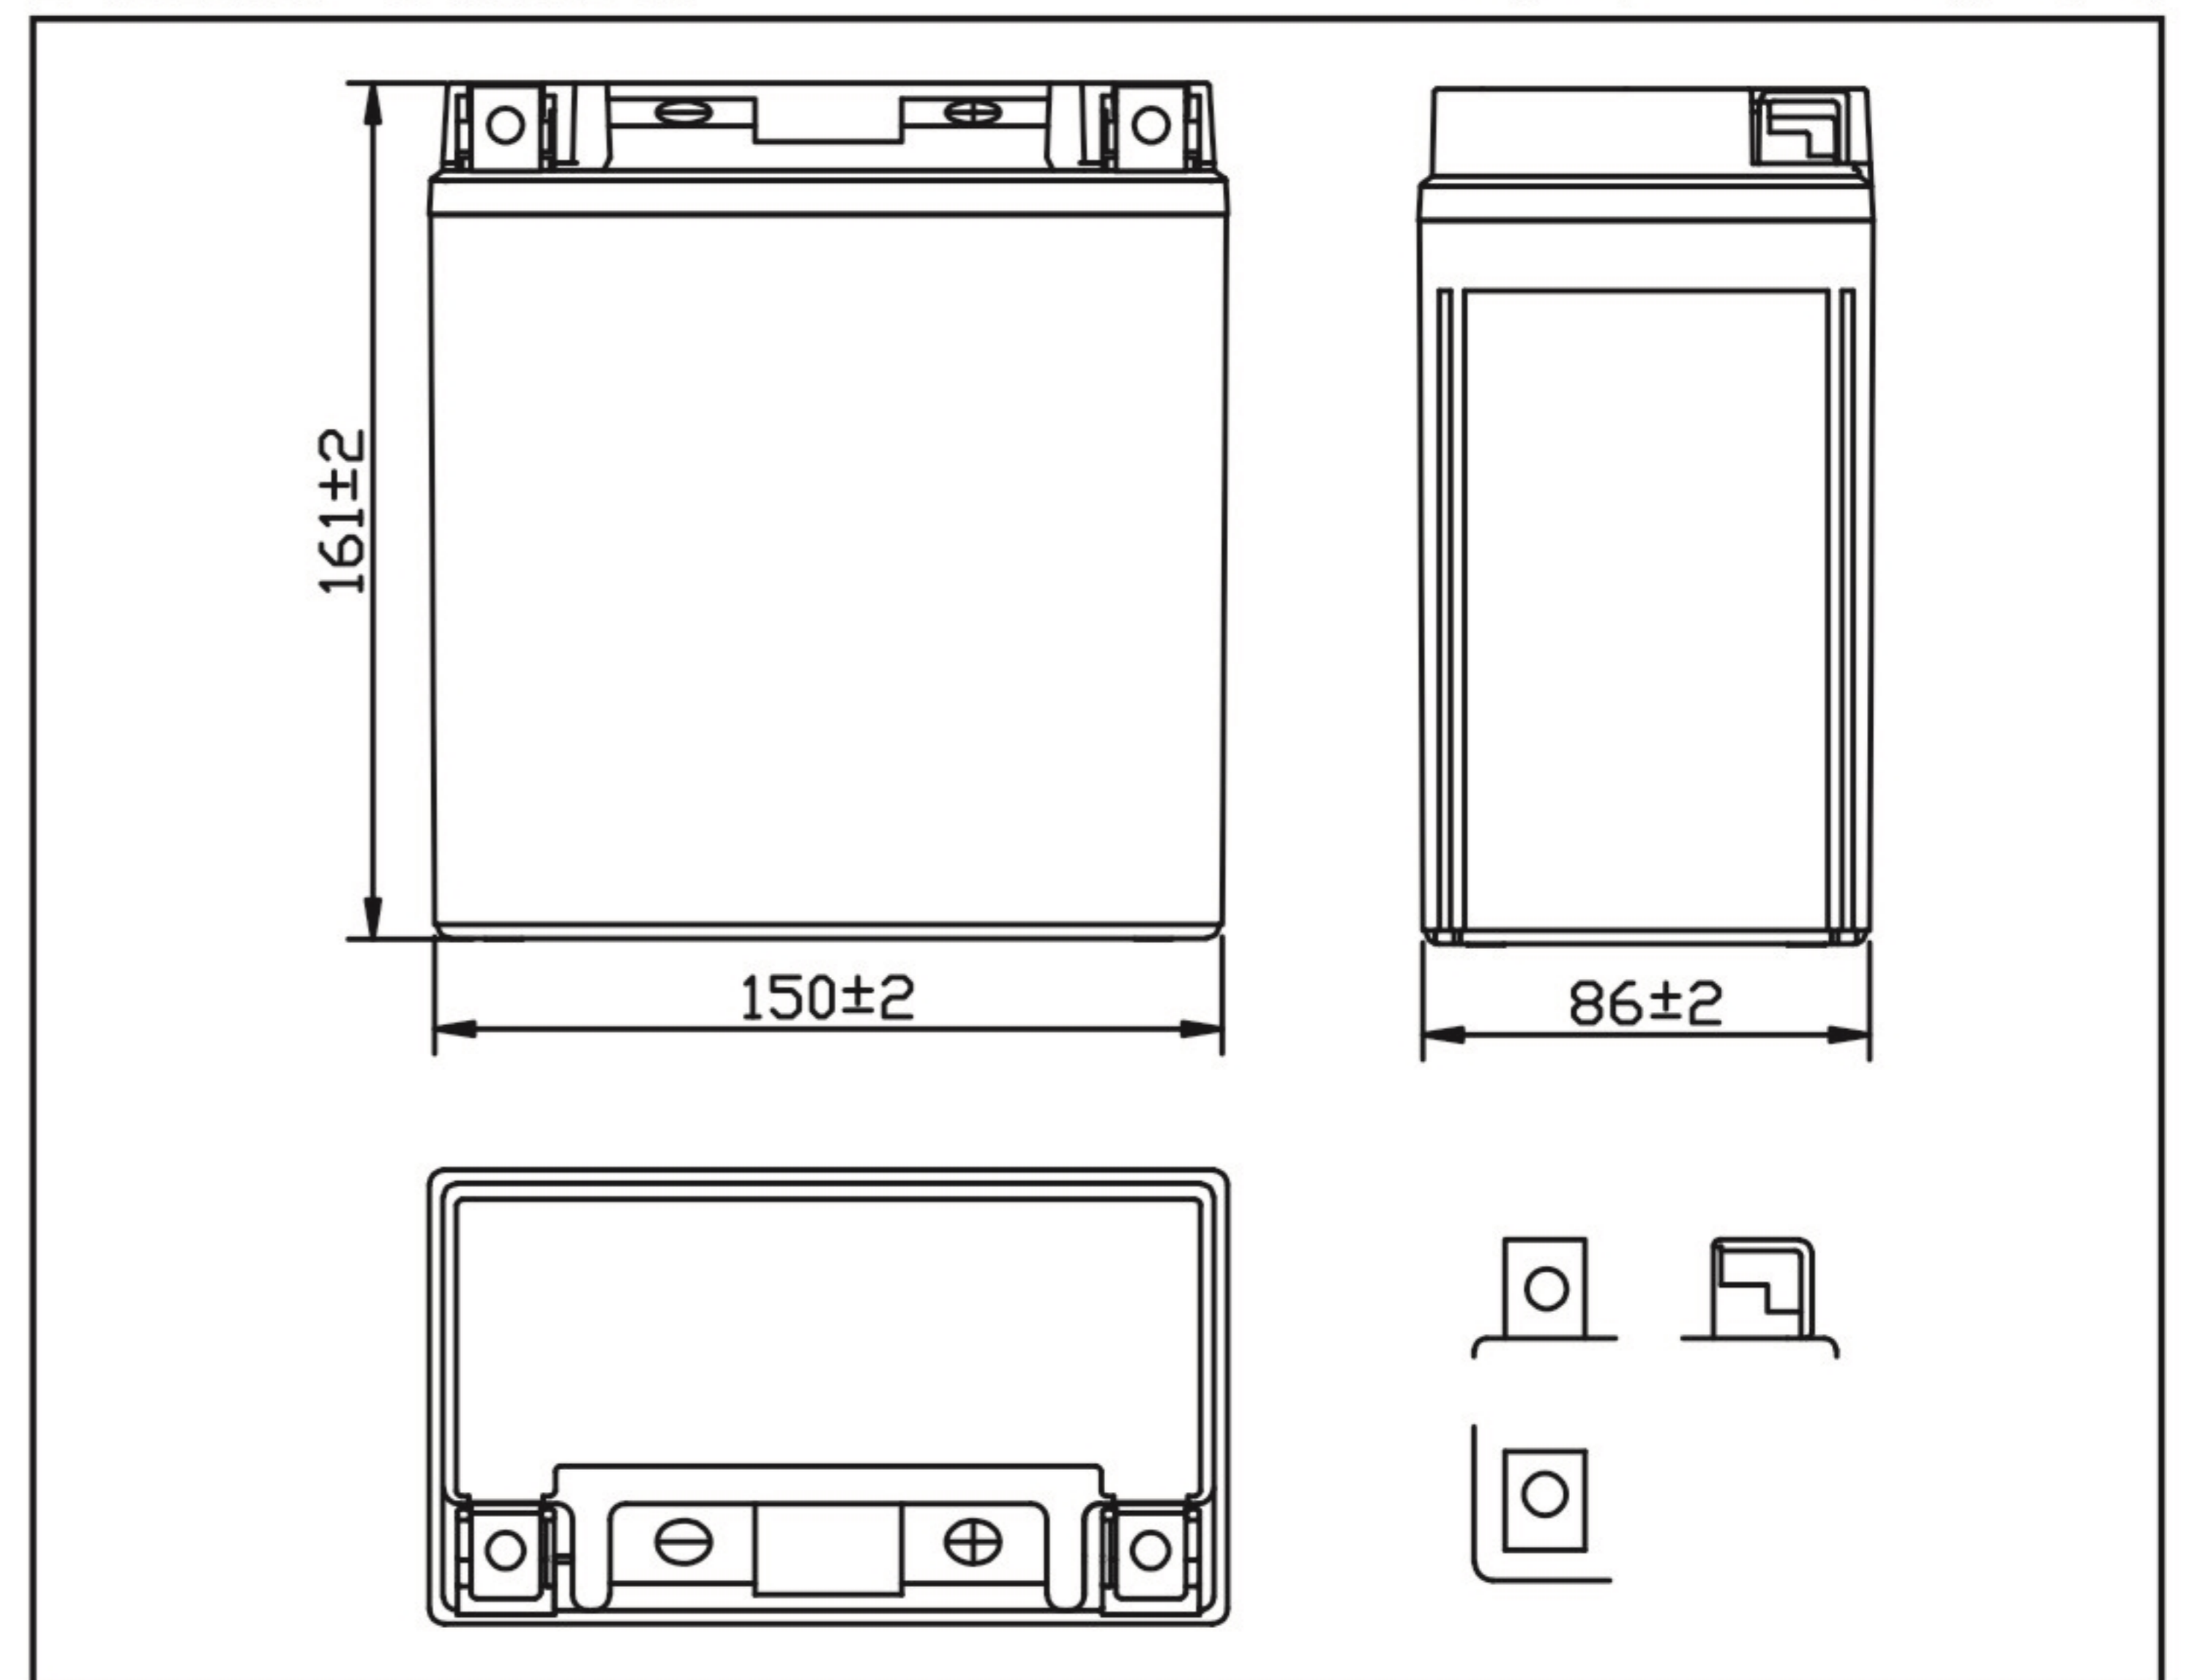

Parts:


Executed Standard: JISD 5302-2004

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Gel	Safety Valve	Seal Glue
ABS	ABS	Cu	PbO ₂	Pb	AGM	dilute sulphuric acid	Fumed Silica	Rubber	Epoxy Resin


Parameter Chart:

Volts		12V	
Capacity (25°C)	10 hours rate	16Ah	
Appx.Dimension (mm)	L±2	150	
	W±2	86	
	H±2	161	
Storage Status	Wet		
Weight (Approx)	5.3Kg		
Retention of Charge Storage @25 °C			
1 month	97%	Directly Mounted	
3 month	90%	Directly Mounted	
6 month	80%	Constant Volts:14.4V Limit Current:3.2A Charging Hours:2-3H	
12 month	40%	Constant Volts:14.4V Limit Current:3.2A Charging Hours:4-6H	
CCA	Factory Standard (-10°C)	Factory Standard (-18°C)	
Discharging Current	100A	200A	

Discharge Current 25°C

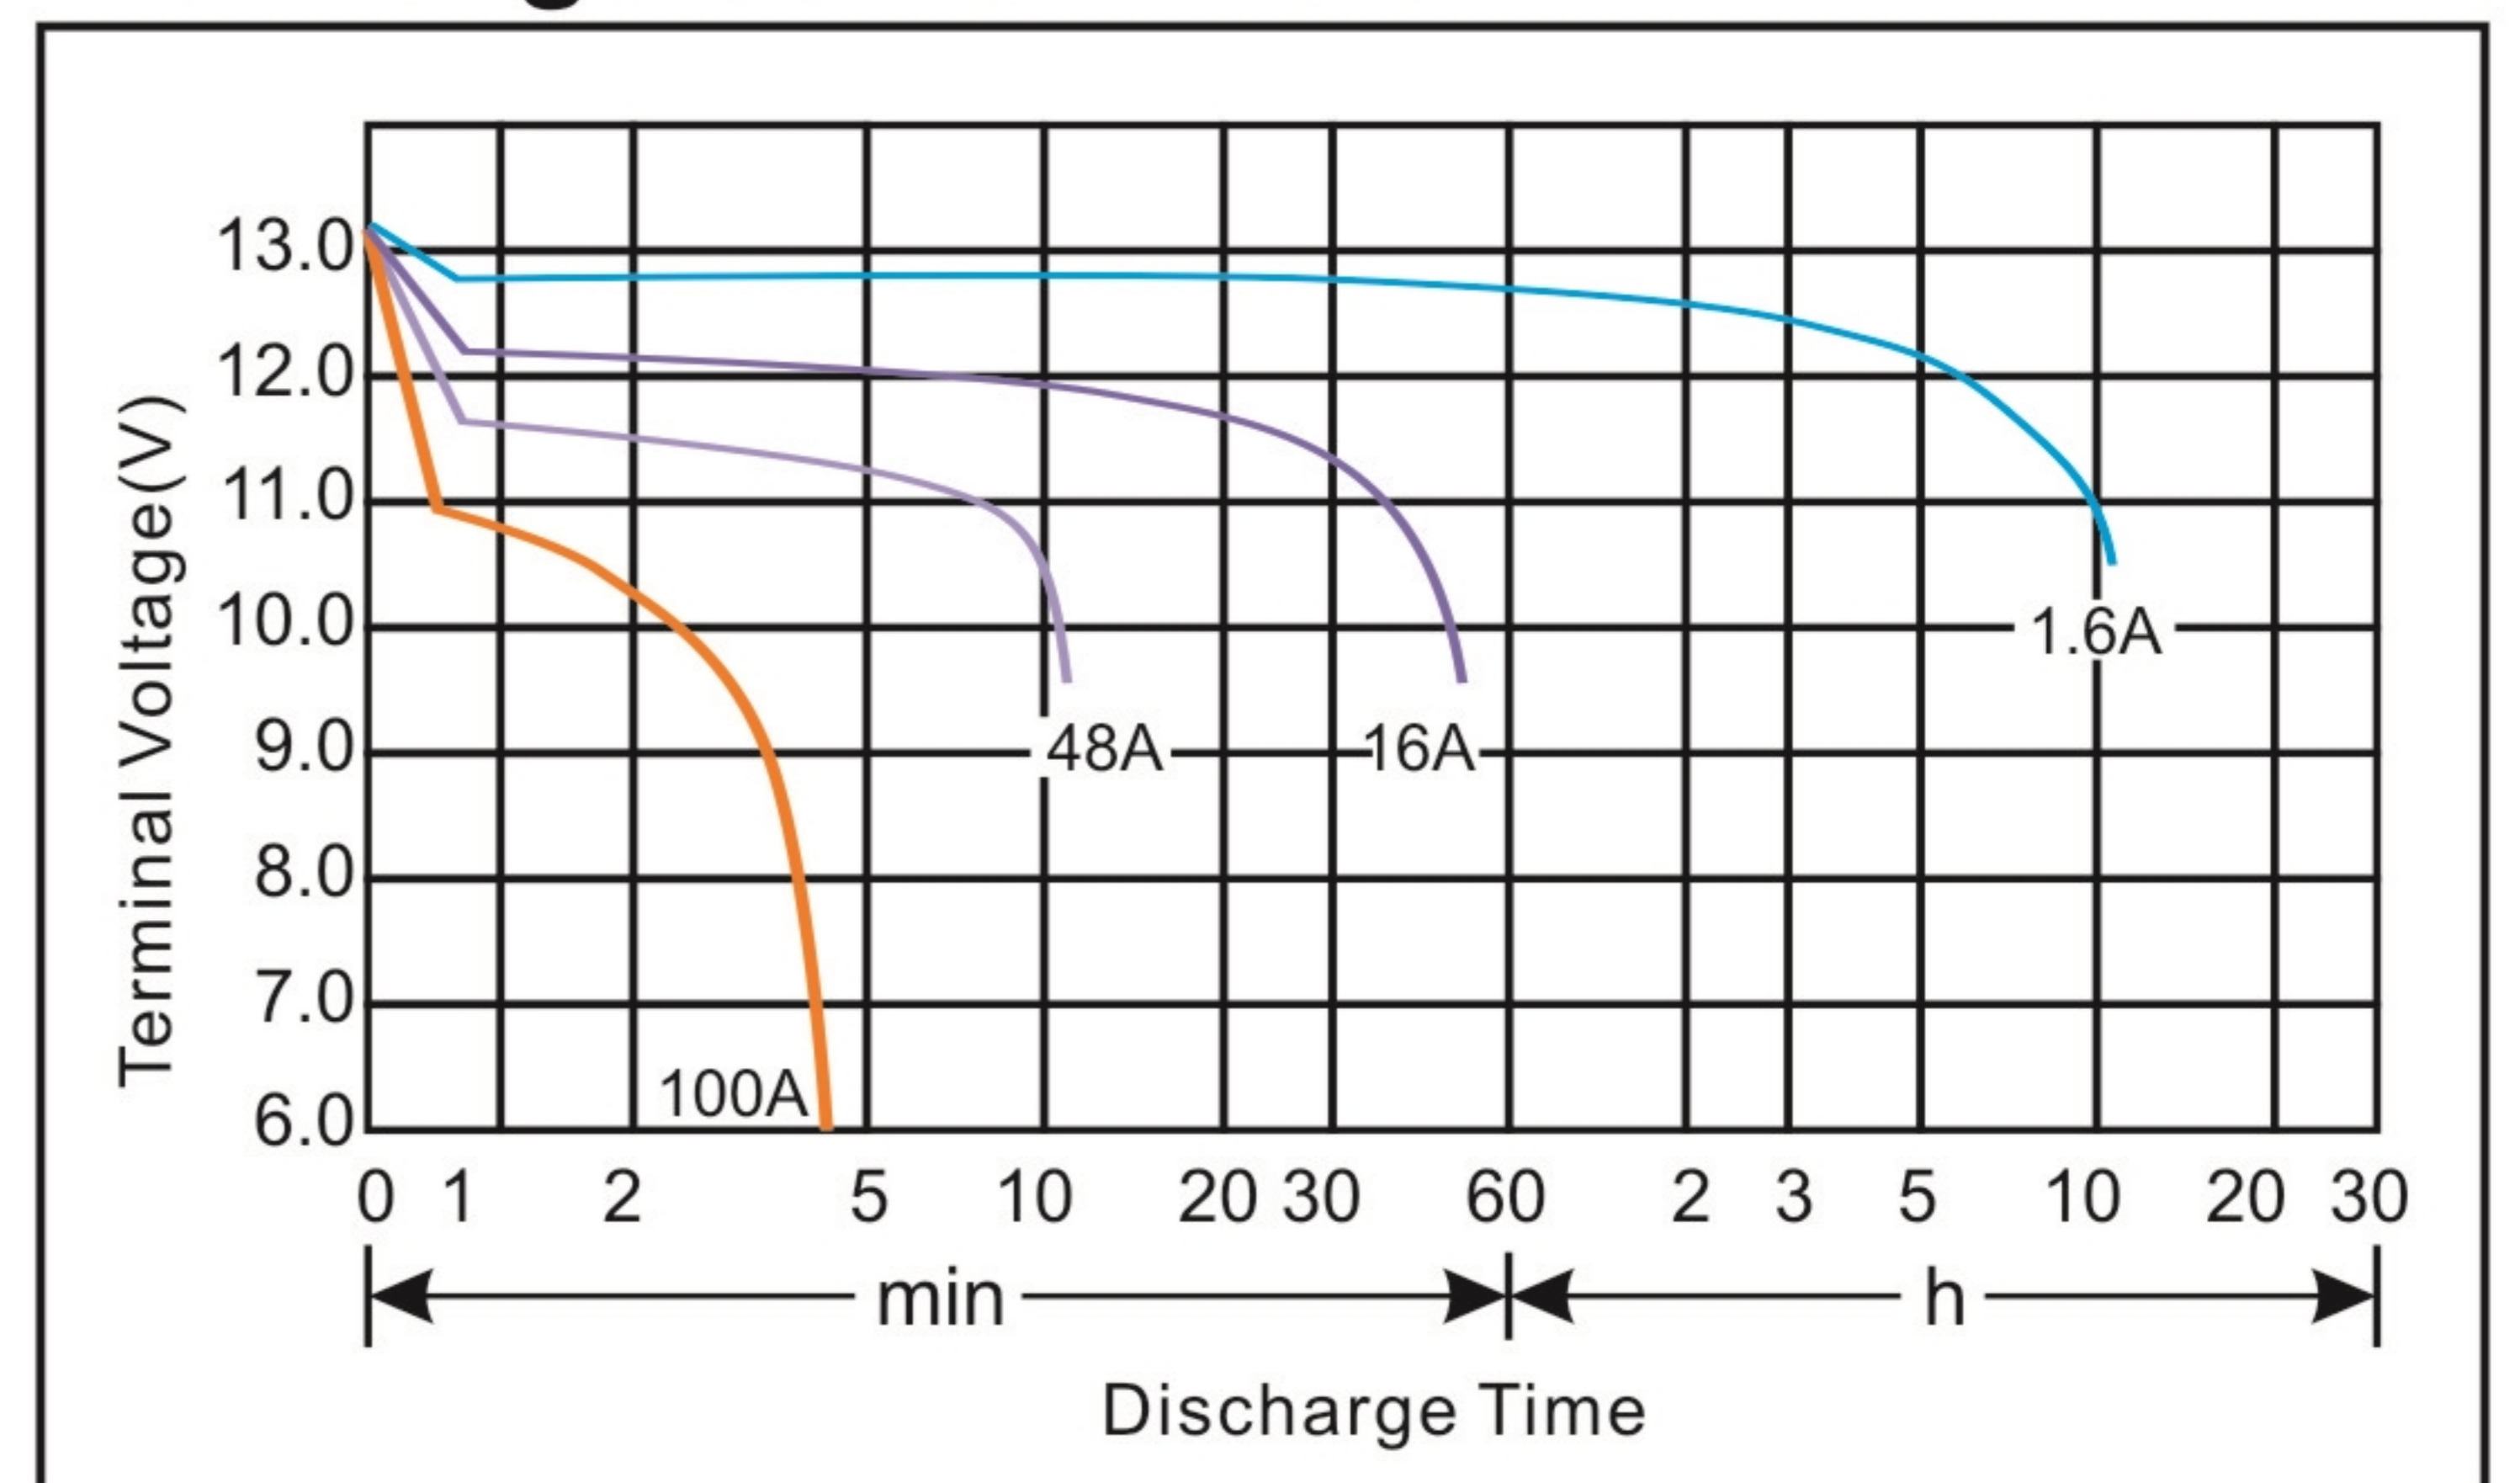

Residual Capacity

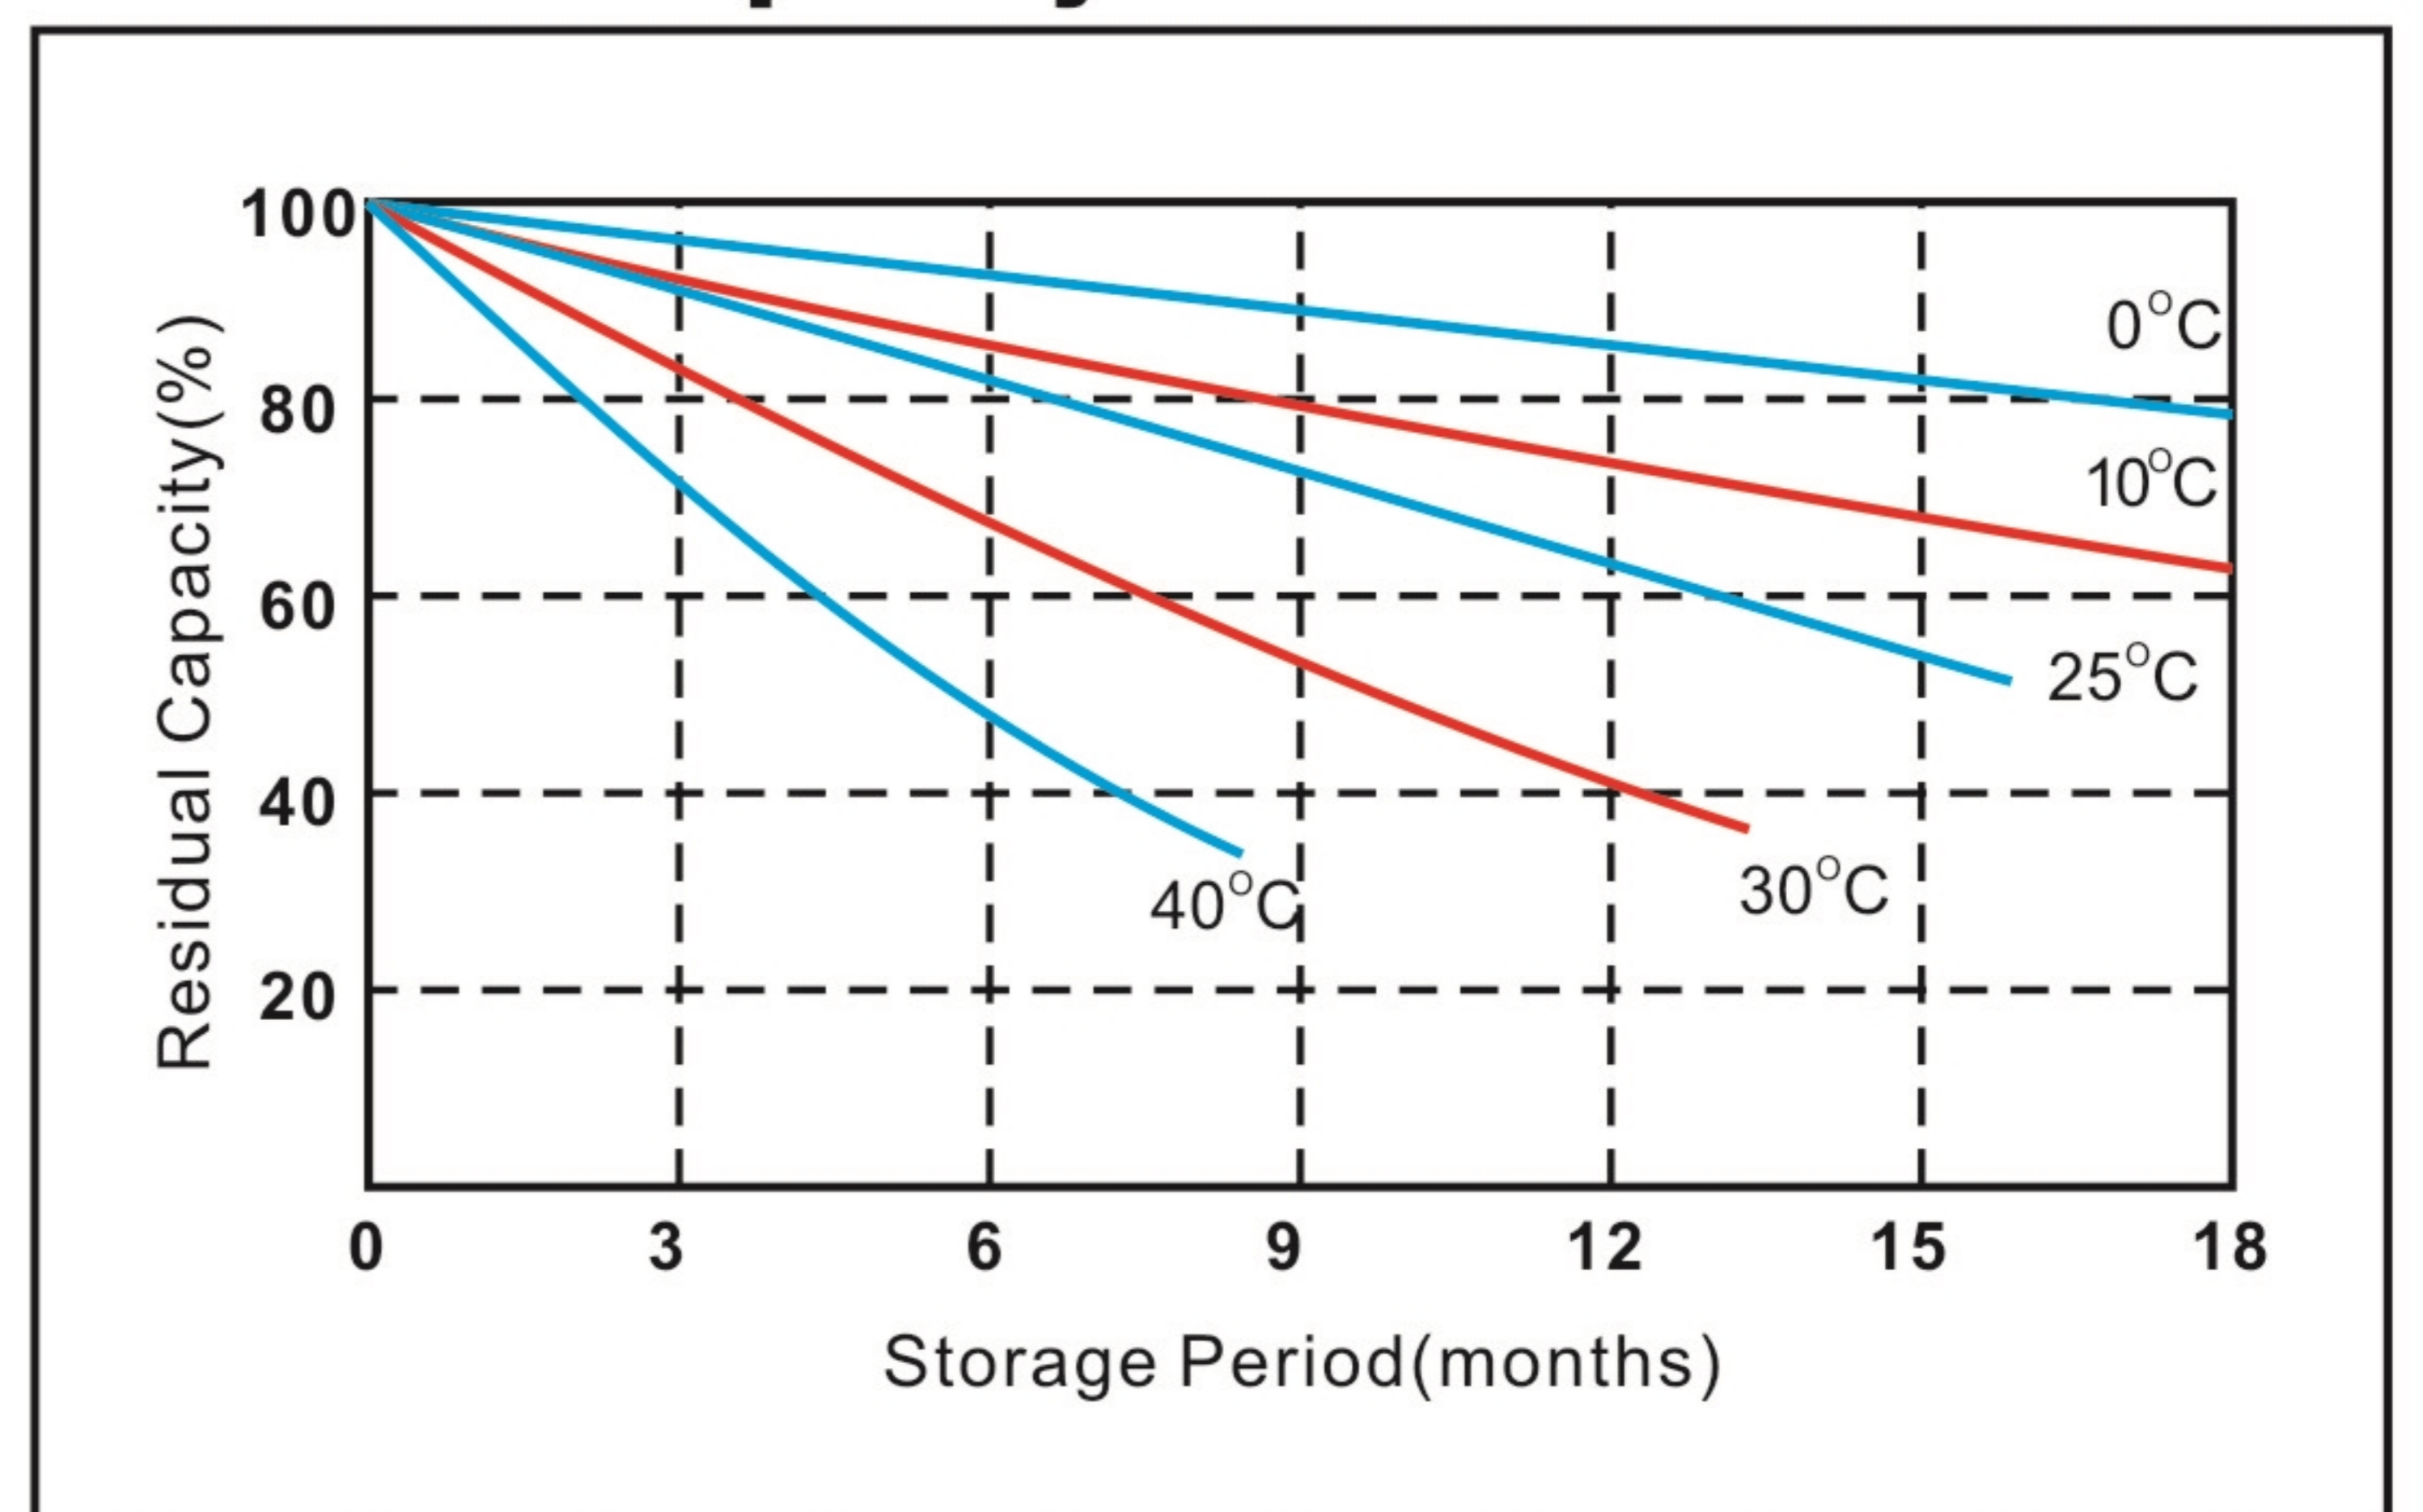

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

★The different item No. of battery can be developed according to the customer's demand.