



MODEL: OT65-12(GEL)/DS/CD

NO.: 302110066-00007

Constant voltage charging characteristics

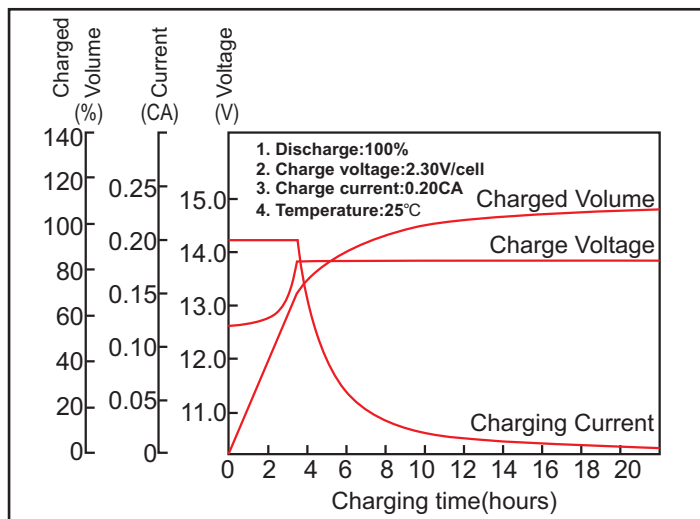

Cycle service life in relation to the depth of discharge

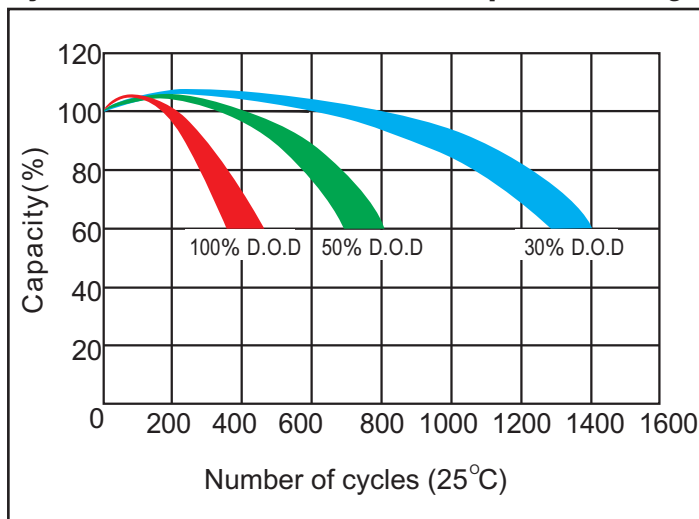

Constant Current Discharge Characteristics (A, 25°C)

| F.V/Time | 5min | 10min | 15min | 30min | 60min | 2h | 3h | 5h | 8h | 10h | 20h |
|----------|-------|-------|-------|-------|-------|------|------|------|-----|-----|-----|
| 9.60V | 207.6 | 143.3 | 110.2 | 67.1 | 41.1 | 23.7 | 16.7 | 11.7 | 7.9 | 6.7 | 3.5 |
| 10.2V | 189.7 | 136.3 | 106.2 | 64.4 | 39.5 | 23.4 | 16.5 | 11.5 | 7.9 | 6.6 | 3.5 |
| 10.5V | 173.6 | 128.9 | 103.2 | 63.1 | 38.6 | 23.2 | 16.3 | 11.4 | 7.8 | 6.5 | 3.4 |
| 10.8V | 157.6 | 120.7 | 100.2 | 61.2 | 37.5 | 22.9 | 16.2 | 11.3 | 7.7 | 6.5 | 3.4 |

Constant Power Discharge Characteristics (Watt, 25°C)

| F.V/Time | 5min | 10min | 15min | 30min | 60min | 2h | 3h | 5h | 8h | 10h | 20h |
|----------|--------|--------|--------|-------|-------|-------|-------|-------|------|------|------|
| 9.60V | 2179.8 | 1547.1 | 1210.4 | 753.5 | 467.9 | 274.5 | 196.4 | 138.3 | 94.1 | 79.6 | 41.9 |
| 10.2V | 2048.8 | 1469.9 | 1161.3 | 723.4 | 449.9 | 270.5 | 194.4 | 136.3 | 93.3 | 79.0 | 41.5 |
| 10.5V | 1909.6 | 1417.9 | 1132.3 | 707.4 | 438.9 | 268.5 | 192.4 | 135.3 | 92.8 | 78.1 | 41.1 |
| 10.8V | 1765.1 | 1351.8 | 1104.2 | 687.4 | 426.9 | 265.5 | 191.4 | 134.3 | 91.9 | 77.8 | 40.9 |

Capacity Factors With Different Temperature

| Battery Type | | -20°C | -10°C | 0°C | 5°C | 10°C | 20°C | 25°C | 30°C | 40°C | 45°C |
|--------------|-----|-------|-------|-----|-----|------|------|------|------|------|------|
| GEL Battery | 12V | 50% | 70% | 83% | 85% | 90% | 98% | 100% | 102% | 104% | 105% |

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.