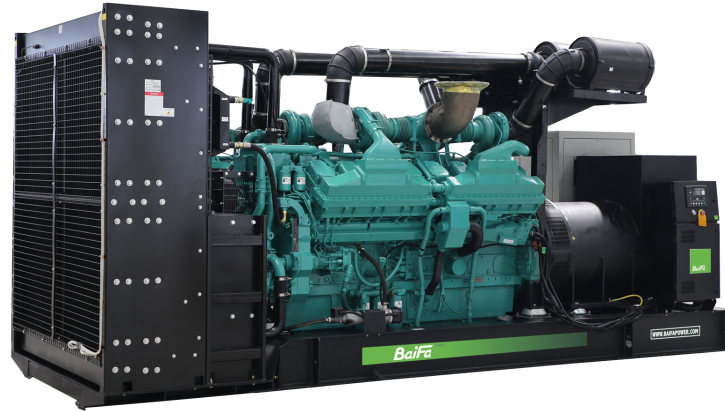


MODEL: BF-C2060Q
400V | 1500rpm | 50Hz


ESP Standby Power	2062 kVA	PRP Prime Power	1875 kVA
ENGINE	Cummins QSK60-G3	ALTERNATOR	STAMFORD PI734E1

GENERAL FEATURES

Engine: Cummins QSK60-G3

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BF-C2060Q

400V | 1500rpm | 50Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	2706	1650/2062	1500/1875
415/240	50	3	0.8	2869	1650/2062	1500/1875
400/230	50	3	0.8	2977	1650/2062	1500/1875
380/220	50	3	0.8	3133	1650/2062	1500/1875

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

**MODEL: BF-C2060Q****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Cummins QSK60-G3
----------------------	------------------

Air intake system	Turbo, Air/Water cooling
-------------------	--------------------------

Fuel system	HPI PT type fuel pump
-------------	-----------------------

Cylinder arrangement	16 in V
----------------------	---------

Displacement	60.2L
--------------	-------

Bore and stroke	159×190 (mm)
-----------------	--------------

Compression ratio	14.5
-------------------	------

Rated speed	1500rpm
-------------	---------

Max. Standby power at rated speed	1790KW/2399BHP
-----------------------------------	----------------

Governor type	Governor Control System (GCS)
---------------	-------------------------------

Exhaust System

Exhaust gas flow	331.5 m ³ /min
------------------	---------------------------

Exhaust temperature	440 °C
---------------------	--------

Max back pressure	6.7kPa
-------------------	--------

Air Intake System

Max intake restriction	6.2kPa
------------------------	--------

Combustion air flow	135.3 m ³ /min
---------------------	---------------------------

Air flow required for radiator	1920 m ³ /min
--------------------------------	--------------------------

**MODEL: BF-C2060Q****400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	191 g/kWh	366 L/h
Fuel consumption @ 75% (Prime Power) Load	190 g/kWh	275 L/h
Fuel consumption @ 50% (Prime Power) Load	200 g/kWh	198 L/h

Oil System

Total oil capacity	280L
Oil consumption	≤4g/kwh
Oil sump capacity	231~261L

Cooling System

Coolant capacity	460L
Max water temperature	104℃

**MODEL: BF-C2060Q****400V | 1500rpm | 50Hz**

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	1900kVA
Alternator Efficiency	95.8%

**MODEL: BF-C2060Q****400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
----------------------------------	----------------

Steady-state voltage deviation	$\leq \pm 1\%$
--------------------------------	----------------

Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
---	--------------

Transient voltage deviation (sudden power increase)	$\leq -15\%$
---	--------------

Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
---	-----------

Voltage recovery time (sudden power increase)	$\leq 4S$
---	-----------

Related range of frequency setting	0-5% adjustable
------------------------------------	-----------------

Steady-state frequency band	$\leq 0.5\%$
-----------------------------	--------------

Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
---	--------------

Transient frequency deviation (sudden power increase)	$\leq -7\%$
---	-------------

Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
---	-----------

Frequency recovery time (sudden power increase)	$\leq 3S$
---	-----------

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
------------------------------	--	-----------

Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	Special tools
-----------------	---	---------------

MODEL: BF-C2060Q**400V | 1500rpm | 50Hz****OPTIONS**

Daily fuel tank

Rainproof type

Remote control panel

Alternator heater

Soundproof type

Paralleling system

Spare parts

Trailer type


Switch box

Automatic transfer switch

DIMENSIONS & WEIGHT**Standard Configuration (open type)**

Overall Dimensions: 5600×2100×2600 mm

Weight: 15200 kg

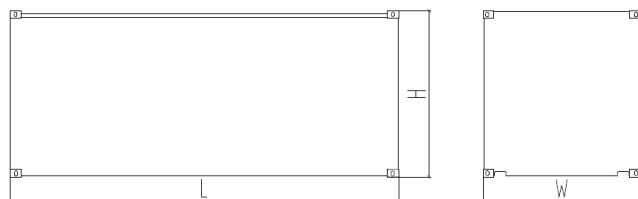**Soundproof Type (standard 40'ft HQ container)**

Overall Dimensions: 12192×2438×2896 mm

Weight: 25200 kg

*Specifications are subject to change without notice.***BAIFA POWER (WUXI) LTD.****WEBSITE: WWW.BAIFAPOWER.COM****EMAIL: MARKETING@BAIFAPOWER.COM****TEL: +86-510-85342633**

Comprehensive Solutions For

POWER GENERATION