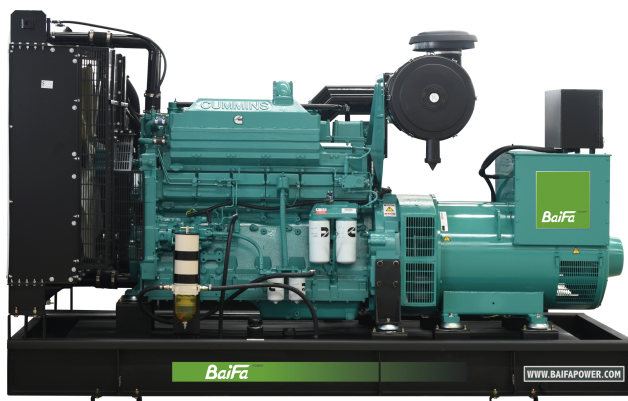


**MODEL: BF-C550**
**400V | 1500rpm | 50Hz**


<b>ESP</b> Standby Power	<b>550 kVA</b>	<b>PRP</b> Prime Power	<b>500 kVA</b>
<b>ENGINE</b>	<b>CCEC Cummins</b> <b>KTA19-G3A</b>	<b>ALTERNATOR</b>	<b>STAMFORD</b> <b>S5L1D-C4</b>

## GENERAL FEATURES

Engine: CCEC Cummins KTA19-G3A

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

**MODEL: BF-C550****400V | 1500rpm | 50Hz**

## GENERATOR RATINGS

Voltage	Hz	Phase	PF ( COS $\Phi$ )	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	722	440/550	400/500
415/240	50	3	0.8	765	440/550	400/500
400/230	50	3	0.8	794	440/550	400/500
380/220	50	3	0.8	836	440/550	400/500

**Prime Power (PRP):** Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

**Standby Power Rating (ESP):** The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

## SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

**MODEL: BF-C550****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	CCEC Cummins KTA19-G3A
----------------------	------------------------

Air intake system	Turbo, Water/Air cooling
-------------------	--------------------------

Fuel system	PT type fuel pump, EFC
-------------	------------------------

Cylinder arrangement	6 in line
----------------------	-----------

Displacement	18.9L
--------------	-------

Bore and stroke	159*159 (mm)
-----------------	--------------

Compression ratio	13.9:1
-------------------	--------

Rated speed	1500rpm
-------------	---------

Max. Standby power at rated speed	504KW/675HP
-----------------------------------	-------------

Governor type	Electronic
---------------	------------

**Exhaust System**

Exhaust gas flow	96.24 m <sup>3</sup> /min
------------------	---------------------------

Exhaust temperature	557 °C
---------------------	--------

Max back pressure	10kPa
-------------------	-------

**Air Intake System**

Max intake restriction	6.23kPa
------------------------	---------

Combustion air flow	34.74 m <sup>3</sup> /min
---------------------	---------------------------

Air flow required for radiator	900 m <sup>3</sup> /min
--------------------------------	-------------------------

**MODEL: BF-C550****400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	203 g/kWh	104.7 L/h
Fuel consumption @ 75% (Prime Power) Load	207 g/kWh	80.0 L/h
Fuel consumption @ 50% (Prime Power) Load	N/A	N/A

**Oil System**

Total oil capacity	50L
Oil consumption	≤4g/kwh
Oil sump capacity	32~38L

**Cooling System**

Coolant capacity	100L
Max water temperature	104℃

**MODEL: BF-C550****400V | 1500rpm | 50Hz**

## ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

### Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	500kVA
Alternator Efficiency	93.8%

**MODEL: BF-C550****400V | 1500rpm | 50Hz**

## GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
----------------------------------	----------------

Steady-state voltage deviation	$\leq \pm 1\%$
--------------------------------	----------------

Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
---	--------------

Transient voltage deviation (sudden power increase)	$\leq -20\%$
---	--------------

Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
---	-----------

Voltage recovery time (sudden power increase)	$\leq 6S$
---	-----------

Related range of frequency setting	0-5% adjustable
------------------------------------	-----------------

Steady-state frequency band	$\leq 1.5\%$
-----------------------------	--------------

Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
---	--------------

Transient frequency deviation (sudden power increase)	$\leq -10\%$
---	--------------

Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
---	-----------

Frequency recovery time (sudden power increase)	$\leq 5S$
---	-----------

## STANDARD FEATURES

Standard auto control system

Exhaust system (including until muffler)

Documents

Oil drain valve

Starting batteries (maintenance-free &amp; watering-free) with connective wires

Special tools

MCCB

**MODEL: BF-C550****400V | 1500rpm | 50Hz****OPTIONS**

Daily fuel tank

Rainproof type

Remote control panel

Alternator heater

Soundproof type

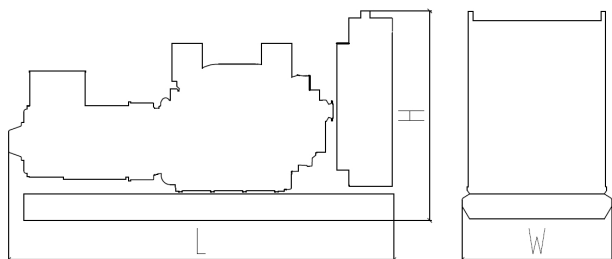
Paralleling system

Spare parts

Trailer type

Switch box

Automatic transfer switch

**DIMENSIONS & WEIGHT****Standard Configuration (open type)**

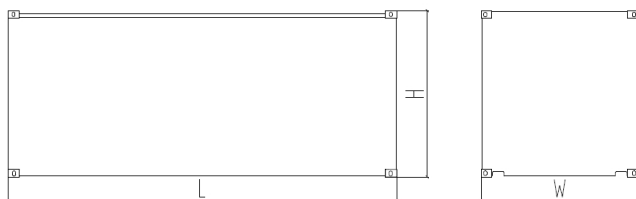
Overall Dimensions: 3450×1400×2100 mm

Weight: 4040 kg

**Standard Configuration (with base fuel tank)**

Overall Dimensions: 3450×1400×2100 mm

Weight: 4280 kg

**Soundproof Type**

Overall Dimensions: 4630×1660×2250 mm

Weight: 5700 kg

*Specifications are subject to change without notice.***BAIFA POWER (WUXI) LTD.****WEBSITE: [WWW.BAIFAPOWER.COM](http://WWW.BAIFAPOWER.COM)****EMAIL: [MARKETING@BAIFAPOWER.COM](mailto:MARKETING@BAIFAPOWER.COM)****TEL: +86-510-85342633**

Comprehensive Solutions For

**POWER GENERATION**