


**MODEL: BF-P2250(W-A)**

**400V | 1500rpm | 50Hz**

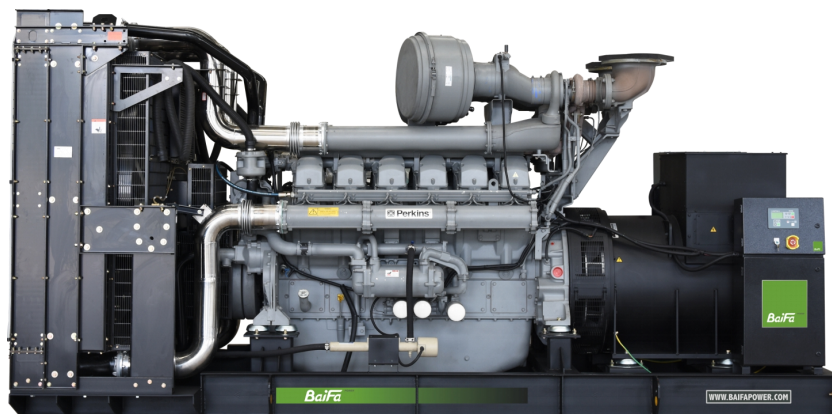

<b>ESP</b> Standby Power	<b>2250 kVA</b>	<b>PRP</b> Prime Power	<b>2050 kVA</b>
<b>ENGINE</b>	<b>Perkins</b>	<b>ALTERNATOR</b>	<b>STAMFORD</b>
	<b>4016-61TRG2</b>		<b>PI734F1</b>

**GENERAL FEATURES**

Engine: Perkins 4016-61TRG2

Alternator: single bearing, IP23, insulation class H

50°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

**MODEL: BF-P2250(W-A)**

**400V | 1500rpm | 50Hz**

**GENERATOR RATINGS**

Voltage	Hz	Phase	PF ( COSΦ )	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	2952	1800kW/2250kVA	1640kW/2050kVA
415/240	50	3	0.8	3130	1800kW/2250kVA	1640kW/2050kVA
400/230	50	3	0.8	3248	1800kW/2250kVA	1640kW/2050kVA
380/220	50	3	0.8	3419	1800kW/2250kVA	1640kW/2050kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 ( eqv ISO 8528 ) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

**SALES PROMISES**

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

**MODEL: BF-P2250(W-A)****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Perkins 4016-61TRG2
----------------------	---------------------

Air intake system	Turbocharged
-------------------	--------------

Fuel system	Direct Injection
-------------	------------------

Cylinder arrangement	16 in V
----------------------	---------

Displacement	61.123L
--------------	---------

Bore and stroke	160×190 mm
-----------------	------------

Compression ratio	13:1
-------------------	------

Rated speed	1500rpm
-------------	---------

Max. Standby power at rated speed	1985kW
-----------------------------------	--------

Governor type	Electronic
---------------	------------

**Exhaust System**

Exhaust gas flow	475 m <sup>3</sup> /min
------------------	-------------------------

Exhaust temperature	489°C
---------------------	-------

Max back pressure	4kPa
-------------------	------

**Air Intake System**

Max intake restriction	3.7kPa
------------------------	--------

Combustion air flow	175 m <sup>3</sup> /min
---------------------	-------------------------

Air flow required for radiator	2600 m <sup>3</sup> /min
--------------------------------	--------------------------

Comprehensive Solutions For

**POWER GENERATION**



**MODEL: BF-P2250(W-A)**

**400V | 1500rpm | 50Hz**

**Fuel System**

Fuel consumption @ 100% (Prime Power) Load	197 g/kWh	413 L/h
Fuel consumption @ 75% (Prime Power) Load	195 g/kWh	309 L/h
Fuel consumption @ 50% (Prime Power) Load	192 g/kWh	209 L/h

**Oil System**

Total oil capacity	213L
Oil consumption	0.52g/kWh
Oil sump capacity	157-213L

**Cooling System**

Coolant capacity	350L
Max water temperature	98°C



**MODEL: BF-P2250(W-A)****400V | 1500rpm | 50Hz****ALTERNATOR SPECIFICATION**

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

**Alternator Data**

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	2080kVA
Alternator Efficiency	96.0%

**MODEL: BF-P2250(W-A)****400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

**STANDARD FEATURES**

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	

**MODEL: BF-P2250(W-A)**

**400V | 1500rpm | 50Hz**

**OPTIONS**

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		


**DIMENSIONS & WEIGHT**



**Standard Configuration (open type)**

Overall Dimensions: 5710×2775×3350 mm

Weight: 13700 kg

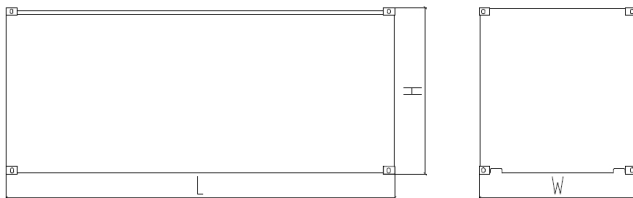

**Soundproof Type (standard 40'ft HQ container)**

Overall Dimensions: 12192×2438×2896 mm

Weight: 23700 kg

*Specifications are subject to change without notice.*

**BAIFA POWER (WUXI) LTD.**  
**WEBSITE: WWW.BAIFAPOWER.COM**  
**EMAIL: MARKETING@BAIFAPOWER.COM**  
**TEL: +86-510-85342633**

Comprehensive Solutions For  
**POWER GENERATION**

