


MODEL: BF-V550

400V | 1500rpm | 50Hz

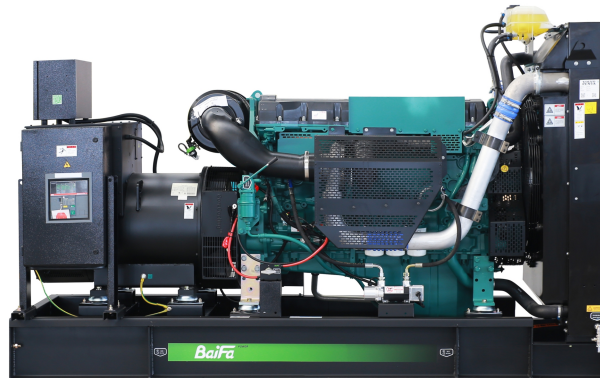

ESP Standby Power	550 kVA	PRP Prime Power	500 kVA
ENGINE	VOLVO TAD1641GE	ALTERNATOR	STAMFORD S5L1D-C4

GENERAL FEATURES

Engine: VOLVO TAD1641GE	Alternator: single bearing, IP23, insulation class H
55°C radiator, fans are driven by belt, with safety guard	Dry type air filter, fuel filter & oil filter
Vibration damper	Standard control panel
24V charging alternator	Exhaust bellows, elbows, flange & muffler
Lead-acid batteries, rack and cables	User manual

**MODEL: BF-V550****400V | 1500rpm | 50Hz****GENERATOR RATINGS**

Voltage	Hz	Phase	PF ($\cos\Phi$)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	722	440/550	400/500
415/240	50	3	0.8	765	440/550	400/500
400/230	50	3	0.8	794	440/550	400/500
380/220	50	3	0.8	836	440/550	400/500

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

**MODEL: BF-V550****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	VOLVO/TAD1641GE
Air intake system	Turbocharged, Air/Air inter cooling
Fuel system	Elec. Injection, Elec. Fuel System
Cylinder arrangement	6 in line
Displacement	16.12L
Bore and stroke	144*165 (mm)
Compression ratio	16.5
Rated speed	1500rpm
Max. Standby power at rated speed	473KW/643HP (with fan)
Governor type	EMS2

Exhaust System

Exhaust gas flow	92 m ³ / min
Exhaust temperature	455°C
Max back pressure	10 kPa

Air Intake System

Max intake restriction	5 kPa
Combustion air flow	38 m ³ /min
Air flow required for radiator	480 m ³ /min

**MODEL: BF-V550****400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	199 g/kWh	100 L/h
Fuel consumption @ 75% (Prime Power) Load	196 g/kWh	73 L/h
Fuel consumption @ 50% (Prime Power) Load	199 g/kWh	49.3 L/h

Oil System

Total oil capacity	48L
Oil consumption	0.1L/h
Oil sump capacity	32~42L

Cooling System

Coolant capacity	60 L
Max water temperature	103°C

**MODEL: BF-V550****400V | 1500rpm | 50Hz**

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	500kVA
Alternator Efficiency	93.8%

MODEL: BF-V550
400V | 1500rpm | 50Hz

GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
----------------------------------	----------------

Steady-state voltage deviation	$\leq \pm 1\%$
--------------------------------	----------------

Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
---	--------------

Transient voltage deviation (sudden power increase)	$\leq -15\%$
---	--------------

Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
---	-----------

Voltage recovery time (sudden power increase)	$\leq 4S$
---	-----------

Related range of frequency setting	0-5% adjustable
------------------------------------	-----------------

Steady-state frequency band	$\leq 0.5\%$
-----------------------------	--------------

Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
---	--------------

Transient frequency deviation (sudden power increase)	$\leq -7\%$
---	-------------

Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
---	-----------

Frequency recovery time (sudden power increase)	$\leq 3S$
---	-----------

STANDARD FEATURES

Standard auto control system	Exhaust system(including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	Special coolant
MCCB		

MODEL: BF-V550**400V | 1500rpm | 50Hz****OPTIONS**

Daily fuel tank

Rainproof type

Remote control panel

Alternator heater

Soundproof type


Paralleling system

Spare parts

Trailer type

Switch box

Automatic transfer switch

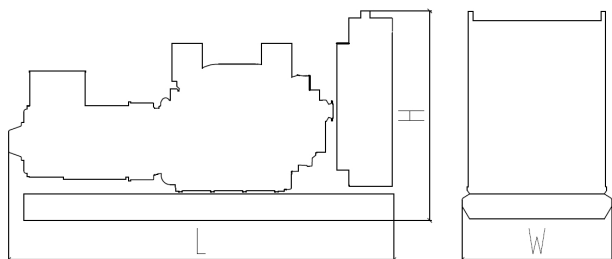DIMENSIONS & WEIGHT**Standard Configuration (open type)**

Overall Dimensions: 3350×1200×2050 mm

Weight: 3500 kg

Standard Configuration (with base fuel tank)

Overall Dimensions: 3350×1200×2050 mm

Weight: 3700 kg

Soundproof Type

Overall Dimensions: 4630×1660×2250 mm

Weight: 5200 kg

*Specifications are subject to change without notice.***BAIFA POWER (WUXI) LTD.****WEBSITE: WWW.BAIFAPOWER.COM****EMAIL: MARKETING@BAIFAPOWER.COM****TEL: +86-510-85342633**

Comprehensive Solutions For

POWER GENERATION