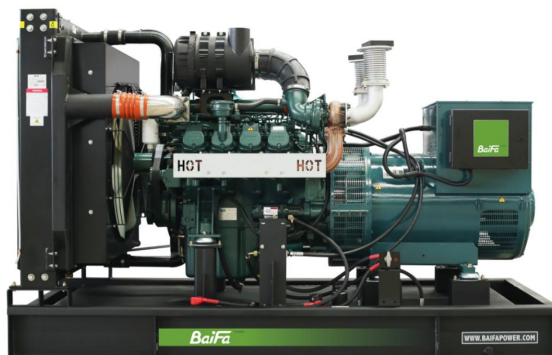


MODEL: BF-DW580
400V | 1500rpm | 50Hz


ESP Standby Power	580 kVA	PRP Prime Power	525 kVA
ENGINE	Doosan DP158LD	ALTERNATOR	STAMFORD HCI544D1

GENERAL FEATURES

Engine: Doosan DP158LD

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BF-DW580**400V | 1500rpm | 50Hz**

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COS Φ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	761	464kW/580kVA	420kW/525kVA
415/240	50	3	0.8	807	464kW/580kVA	420kW/525kVA
400/230	50	3	0.8	837	464kW/580kVA	420kW/525kVA
380/220	50	3	0.8	881	464kW/580kVA	420kW/525kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: BF-DW580
400V | 1500rpm | 50Hz

ENGINE SPECIFICATION

Manufacturer / Model	Doosan DP158LD
Air intake system	Turbo, Air/Air cooling
Fuel system	P type fuel pump
Cylinder arrangement	8 in V
Displacement	14.618L
Bore and stroke	128×142 mm
Compression ratio	15:1
Rated speed	1500rpm
Max. Standby power at rated speed	510kW
Governor type	Electronic

Exhaust System

Exhaust gas flow	98 m ³ /min
Exhaust temperature	561℃
Max back pressure	5.9kPa

Air Intake System

Max intake restriction	6.2kPa
Combustion air flow	33.1 m ³ /min
Air flow required for radiator	700 m ³ /min



MODEL: BF-DW580

400V | 1500rpm | 50Hz

Fuel System

Fuel consumption @ 100% (Prime Power) Load	115.1 L/h
--	-----------

Fuel consumption @ 75% (Prime Power) Load	83.4 L/h
---	----------

Fuel consumption @ 50% (Prime Power) Load	55.1 L/h
---	----------

Oil System

Total oil capacity	22L
--------------------	-----

Oil sump capacity	13-22L
-------------------	--------

Cooling System

Coolant capacity	79L
------------------	-----

Max water temperature	103°C
-----------------------	-------

**MODEL: BF-DW580****400V | 1500rpm | 50Hz**

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	550kVA
Alternator Efficiency	94.3%

**MODEL: BF-DW580****400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
----------------------------------	----------------

Steady-state voltage deviation	$\leq \pm 1\%$
--------------------------------	----------------

Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
---	--------------

Transient voltage deviation (sudden power increase)	$\leq -20\%$
---	--------------

Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
---	-----------

Voltage recovery time (sudden power increase)	$\leq 6S$
---	-----------

Related range of frequency setting	0-5% adjustable
------------------------------------	-----------------

Steady-state frequency band	$\leq 1.5\%$
-----------------------------	--------------

Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
---	--------------

Transient frequency deviation (sudden power increase)	$\leq -10\%$
---	--------------

Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
---	-----------

Frequency recovery time (sudden power increase)	$\leq 5S$
---	-----------

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
------------------------------	--	-----------

Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB
-----------------	---	------

MODEL: BF-DW580**400V | 1500rpm | 50Hz****OPTIONS**

Daily fuel tank

Rainproof type

Remote control panel

Alternator heater

Soundproof type

Paralleling system

Spare parts

Trailer type

Switch box

Automatic transfer switch

DIMENSIONS & WEIGHT**Standard Configuration (open type)**

Overall Dimensions: 3100×1390×1780 mm

Weight: 3335 kg

Standard Configuration (with base fuel tank)

Overall Dimensions: 3100×1390×1920 mm

Weight: 3550 kg

Soundproof Type

Overall Dimensions: 4630×1660×2250 mm

Weight: 5050 kg

*Specifications are subject to change without notice.***BAIFA POWER (WUXI) LTD.****WEBSITE: WWW.BAIFAPOWER.COM****EMAIL: MARKETING@BAIFAPOWER.COM****TEL: +86-510-85342633**

Comprehensive Solutions For

POWER GENERATION