

**MODEL: BF-P150-60**

**440V | 1800rpm | 60Hz**



<b>ESP</b> Standby Power	<b>165kVA</b>	<b>PRP</b> Prime Power	<b>150kVA</b>
<b>ENGINE</b>	<b>Perkins</b>	<b>ALTERNATOR</b>	<b>STAMFORD</b>
	<b>1106A-70TG1</b>		<b>UCI274E1</b>

**GENERAL FEATURES**

Engine: Perkins 1106A-70TG1

Alternator: single bearing, IP23, insulation class H

50°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

**MODEL: BF-P150-60**

**440V | 1800rpm | 60Hz**

### GENERATOR RATINGS

Voltage	Hz	Phase	PF ( COSΦ )	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
480/277	60	3	0.8	198	132kW/165kVA	120kW/150kVA
460/266	60	3	0.8	207	132kW/165kVA	120kW/150kVA
440/254	60	3	0.8	217	132kW/165kVA	120kW/150kVA
416/240	60	3	0.8	229	132kW/165kVA	120kW/150kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

### SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

**MODEL: BF-P150-60****440V | 1800rpm | 60Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Perkins 1106A-70TG1
Air intake system	Turbocharged
Fuel system	Direct Injection
Cylinder arrangement	6 in line
Displacement	7.01L
Bore and stroke	105×135 mm
Compression ratio	18.2
Rated speed	1800rpm
Max. Standby power at rated speed	155.4kW
Governor type	Electronic

**Exhaust System**

Exhaust gas flow	29.7 m <sup>3</sup> /min
Exhaust temperature	526°C
Max back pressure	6kPa

**Air Intake System**

Max intake restriction	5kPa
Combustion air flow	11.9 m <sup>3</sup> /min
Air flow required for radiator	182 m <sup>3</sup> /min

**MODEL: BF-P150-60****440V | 1800rpm | 60Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	210.9 g/kWh	34.2 L/h
Fuel consumption @ 75% (Prime Power) Load	210.8 g/kWh	25.8 L/h
Fuel consumption @ 50% (Prime Power) Load	209.3 g/kWh	17.6 L/h

**Oil System**

Total oil capacity	18L
Oil sump capacity	12.5-16.1L
Oil consumption at full load as a % of fuel consumption	< 0.1%

**Cooling System**

Coolant capacity	21L
Max water temperature	110°C

**MODEL: BF-P150-60****440V | 1800rpm | 60Hz****ALTERNATOR SPECIFICATION**

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

**Alternator Data**

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	167.5kVA
Alternator Efficiency	91.7%

**MODEL: BF-P150-60****440V | 1800rpm | 60Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

**STANDARD FEATURES**

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB

Base fuel tank


**MODEL: BF-P150-60**

**440V | 1800rpm | 60Hz**

**OPTIONS**

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

**DIMENSIONS & WEIGHT**

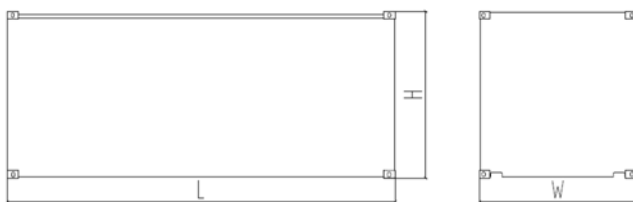

**Standard Configuration (open type)**

Overall Dimensions: 2410×930×1650 mm

Weight: 1600kg

**Soundproof Type**

Overall Dimensions: 3250×1170×1800 mm

Weight: 2400kg

*Specifications are subject to change without notice.*

**BAIFA POWER (WUXI) LTD.**  
**WEBSITE: WWW.BAIFAPOWER.COM**  
**EMAIL: MARKETING@BAIFAPOWER.COM**  
**TEL: +86-510-85342633**

Comprehensive Solutions For  
**POWER GENERATION**

