

MODEL: BF-P230-60 (T3)

440V | 1800rpm | 60Hz



ESP Standby Power	250kVA	PRP Prime Power	228kVA
ENGINE	Perkins	ALTERNATOR	STAMFORD
	1106D-E70TAG5		UCI274H1

GENERAL FEATURES

Engine: Perkins 1106D-E70TAG5	Alternator: single bearing, IP23, insulation class H
50°C radiator, fans are driven by belt, with safety guard	Dry type air filter, fuel filter & oil filter
Vibration damper	Standard control panel
24V charging alternator	Exhaust bellows, elbows, flange & muffler
Lead-acid batteries, rack and cables	User manual

MODEL: BF-P230-60 (T3)

440V | 1800rpm | 60Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
480/277	60	3	0.8	301	200kW/250kVA	182kW/228kVA
460/266	60	3	0.8	314	200kW/250kVA	182kW/228kVA
440/254	60	3	0.8	328	200kW/250kVA	182kW/228kVA
416/240	60	3	0.8	347	200kW/250kVA	182kW/228kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: BF-P230-60 (T3)**440V | 1800rpm | 60Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Perkins 1106D-E70TAG5
Air intake system	Turbocharged and Air Charge Cooled
Fuel system	Direct Injection
Cylinder arrangement	6 in line
Displacement	7.01L
Bore and stroke	105×135 mm
Compression ratio	16.8
Rated speed	1800rpm
Max. Standby power at rated speed	234.5kW
Governor type	ECM

Exhaust System

Exhaust gas flow	38.5 m ³ /min
Exhaust temperature	553°C
Max back pressure	10kPa

Air Intake System

Max intake restriction	8kPa
Combustion air flow	18.5 m ³ /min
Air flow required for radiator	343 m ³ /min

MODEL: BF-P230-60 (T3)**440V | 1800rpm | 60Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	214.9 g/kWh	51.5 L/h
Fuel consumption @ 75% (Prime Power) Load	229.1 g/kWh	41.6 L/h
Fuel consumption @ 50% (Prime Power) Load	233.4 g/kWh	28.9 L/h

Oil System

Total oil capacity	17.5L
Oil sump capacity	12.5-15.5L
Oil consumption at full load as a % of fuel consumption	< 0.1%

Cooling System

Coolant capacity	21L
Max water temperature	108°C

MODEL: BF-P230-60(T3)**440V | 1800rpm | 60Hz****ALTERNATOR SPECIFICATION**

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	245kVA
Alternator Efficiency	93.2%

MODEL: BF-P230-60 (T3)**440V | 1800rpm | 60Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
Transient voltage deviation (sudden power increase)	$\leq -15\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
Voltage recovery time (sudden power increase)	$\leq 4S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 0.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
Transient frequency deviation (sudden power increase)	$\leq -7\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
Frequency recovery time (sudden power increase)	$\leq 3S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB

Base fuel tank



MODEL: BF-P230-60 (T3)

440V | 1800rpm | 60Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

DIMENSIONS & WEIGHT

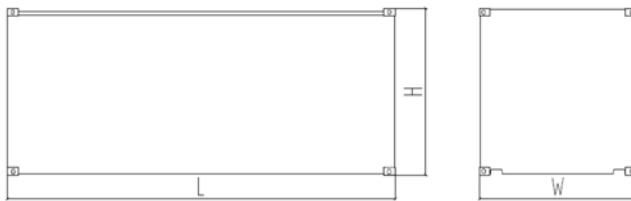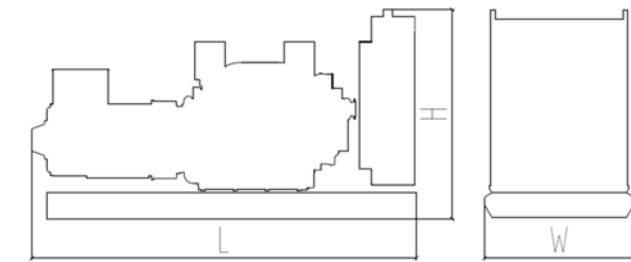

Standard Configuration (open type)
Overall Dimensions: 2550×930×1670 mm
Weight: 1750kg
Soundproof Type
Overall Dimensions: 3590×1150×2050 mm
Weight: 2650kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.
WEBSITE: WWW.BAIFAPOWER.COM
EMAIL: MARKETING@BAIFAPOWER.COM
TEL: +86-510-85342633

Comprehensive Solutions For
POWER GENERATION

