



RECOMMEND PCB LAYOUT COMPONENT SIDE (YX125-XX2)

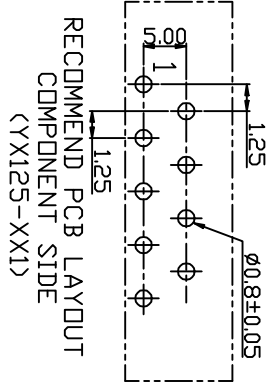

RECOMMEND PCB LAYOUT COMPONENT SIDE (YX125-XX1)



FPC/FPC DIMENSION THICKNESS 0.3±0.05mm

- NOTES
1. MATERIALS:
HOUSING-PBT UL 94V-0,
TERMINAL-PHOSPHOR BRONZE.
 2. ORDER INFORMATION:
AFD4-XX X X A X
- CKT SIZE
03 TO 32.
- 0: TOP ENTRY
1: SIDE ENTRY
- PLATING:
0: Sn/Pb 90/10 120u"
OVER 50u" NICKEL.
G: LEAD-FREE
- 空白:
W: REVERSE

CKT	A	B
3	9.55	5.20
4	10.80	6.45
5	12.05	7.70
6	13.30	8.95
7	14.55	10.20
8	15.80	11.45
9	17.05	12.70
10	18.30	13.95
11	19.55	15.20
12	20.80	16.45
13	22.05	17.70
14	23.30	18.95
15	24.55	20.20
16	25.80	21.45
17	27.05	22.70
18	28.30	23.95
19	29.55	25.20
20	30.80	26.45
21	32.05	27.70
22	33.30	28.95
23	34.55	30.20
24	35.80	31.45
25	37.05	32.70
26	38.30	33.95
27	39.55	35.20
28	40.80	36.45
29	42.05	37.70
30	43.30	38.95
31	44.55	40.20
32	45.80	41.45

ENGINEERING DRAWING UNIT: mm		Date: 04/07/05 Sheet: 1 of 1	
		Title: FPC 1.25 NP 90DIP	
General Tolerances: Angles: 3°		Drawn by: _____ Appr'd by: _____	
DIM: 0.0 ±0.30 0.00 ±0.25 0.000 ±0.15		Checked by: _____ Scale: 3 : 1	
Revision Record REV A RELEASE 04/07/05		Reverse Dwg. On Cad System	

深圳扬讯电子有限公司