環保物料

Number Of Contact

Polarization Mark

(0.95)

4.40±0.05
1.40±0.05
B±0.05
0.52±0.05
1.20±0.05
0.50±0.03 A±0.05
0.30±0.03

0.12±0.03
0.15±0.03 0.50±0.05
C±0.08 D±0.10
A±0.08
B±0.10

Silk Line
FPC Silk Line Stiffener Side

3.50Min. (Stiffener Side)
(3.9) (Silk Line)
(1.0)

0.08 +0.05 −0.02
0.55
(3.0)
(2.4)(Insertion Depth)
3.20±0.10
(1.15)
(1.00)
1.00±0.10
0.70±0.10
□ 0.10

APPLICABLE FFC/FPC
Project View

1.25 +0.30 −0.00
0.80±0.05
R0.20Max.
R0.20±0.10
(A+1)±0.05
(A+0.3)±0.05
A±0.05
0.50±0.03
0.30±0.03
0.30±0.03
2.60
3.5Min.
0.20±0.03
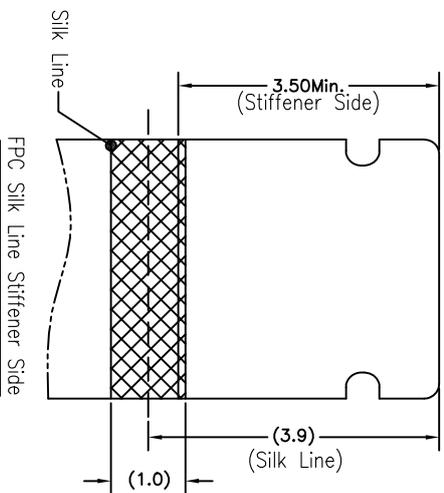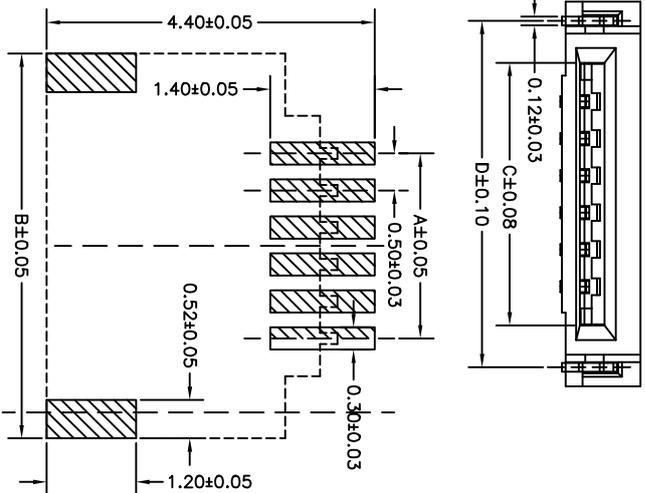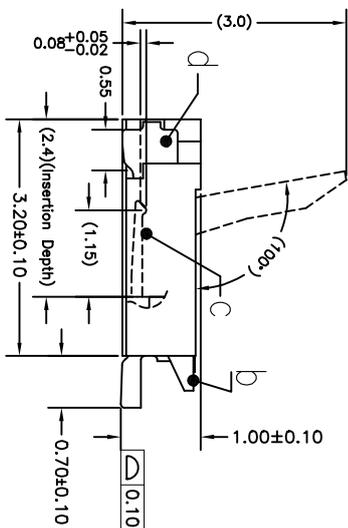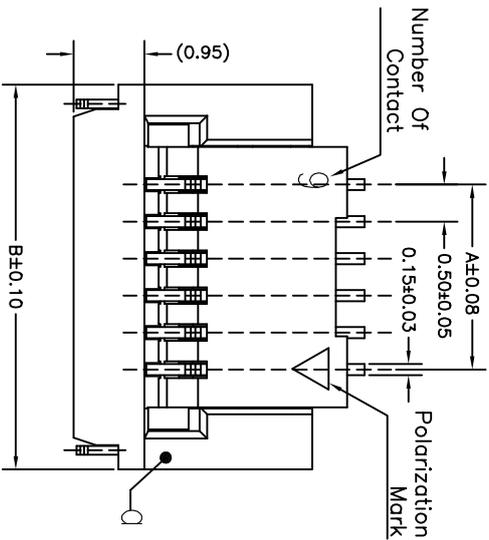
Note:
1. Material:
1.1 Housing: thermoplastic high temp.UL94V-0; Color: black.
1.2 Latch: thermoplastic high temp.UL94V-0; Color: natural.
1.3 Terminal: copper alloy.
1.4 Fitting Nail: copper alloy.
2. Finish:
2.1 Terminal:
   Underplating: Au/matt Tin overall.
2.2 Fitting Nail:
   Underplating: matt Tin overall.
3. Product must comply HF RoHS specification.
4. Product No:

AFC49-S **
CKTS
CONTACTS TYPE
F:Lower
H:Double Lower
PLATING
1:Gold flash 1u"
2:Gold flash 2u"
3:Gold flash 3u"
6:Half Gold Tin
7:Half Gold Tin 3u"
B:Bright-Tin 80-150u"
C:Matt-Tin 80-150u"
PACKING
A:Tape&Reel
C:Tube
REMARKS
HF:Halogen

Dimension				
Number of Contacts	A	B	C	D
4	1.50	4.20	2.55	3.68
6	2.50	5.20	3.55	4.68
10	4.50	7.20	5.55	6.68

CUSTOMER DRAWING
Tolerance Unspecified (未注公差)
0.0 ±0.15 0° ±5°
0.00 ±0.10 0°0' ±3°
0.000 ±0.05 0°00' ±1°
Size(图幅): A4
Unit(单位): MM
Scale(比例): 1:1
Page(页数): 1 0F 1
Rev(版本): A
Product Name(产品名称):
0.5Pitch H=1.0
FPC Easy-on R/A Type1 SMT CONN
Product No(产品料号):
AFC49-S**F**-**

Designer(设计): Allan 02/10/15'
Checked(审核): Allan 02/10/15'
Approved(核准): Chu. 02/12/15'

Rev 版本	Change Description 变更内容	Date 日期	Revisor 制/修订人
A	初版发行	2015/02/14	Allan

Project View (投影视角)