
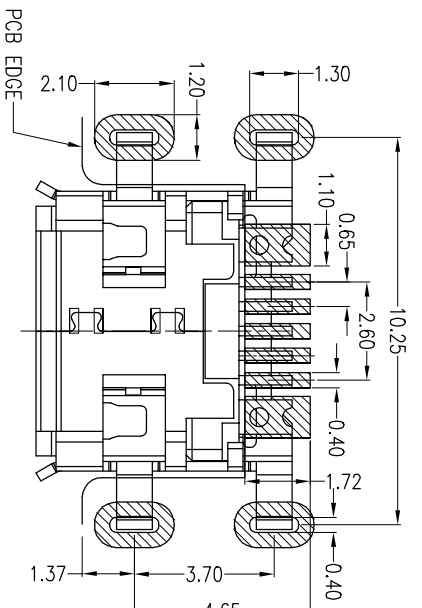
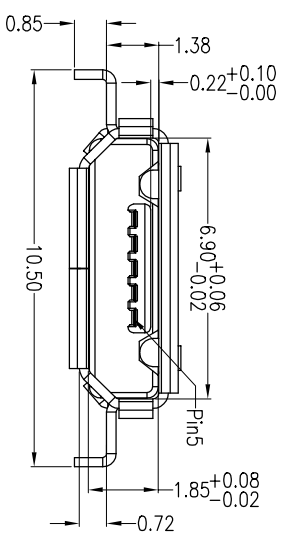
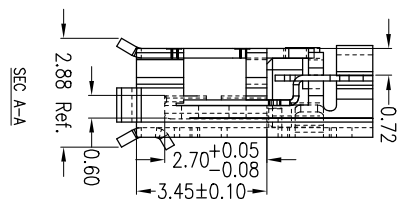
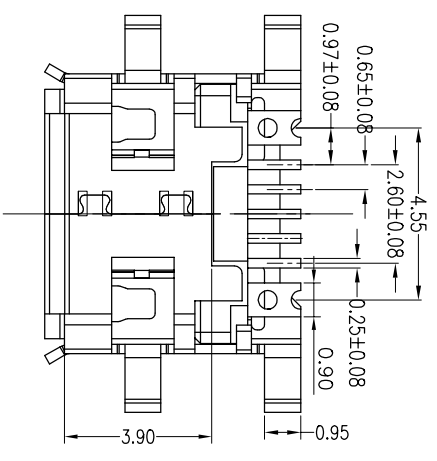

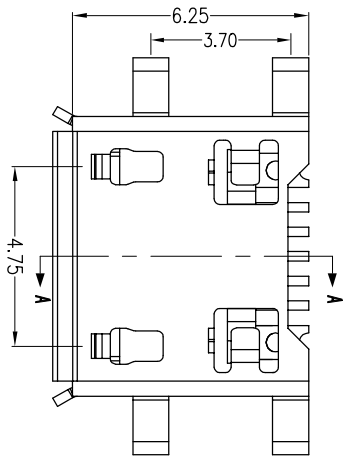


REV.	EON NO	LOCATIONS	DESCRIPTION	DATE

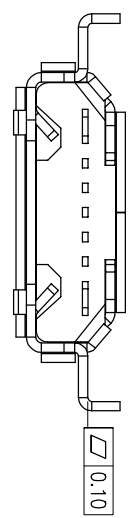

RECOMMENDED PCB LAYOUT
PCB图仅供参考

- Note:
1. Material:
 - 1.1 Housing: High temperature thermoplastic with g.f.Ul94V-0
 - 1.2 Contact: copper alloy,t=0.15mm
 - 1.3 Shell: copper alloy,t=0.25mm
- *2.Specification:
- 2.1 Current rating:1.5PIN 1.8A Max/2,3,4PIN 1A Max voltage: 100 V(ac) for 1 min.
 - 2.2 Dielectric withstanding
 - 2.3 Contact resistance: 30 mΩ Max.
 - 2.4 Insulation resistance: 100 MΩ Min.
 - 2.5 Total mating force: 3.57 Kgf Max.
 - 2.6 Total unmating force: 1.0 Kgf Min.
 - 2.7 Temperature range: -30°C~80°C

A 01 S B X X X X X X X X X X XX-051

① 外壳材质
② 1:02890R-H
③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

外壳电镀
1:180A'
2:雾150A'
3:4Au1U'
4:4Au1U'

端子电镀
01:4Au1U'
02:4Au1.5U'
03:4Au1U'
05:4Au1U'
10:4Au10U'
15:4Au15U'
30:4Au30U'

主体颜色
B:黑色

主体材质
1:1CP
端子材质
4:05191R-EH

深圳扬讯电子有限公司

TITLE: Micro usb 5s B Type Smt(沉板式)四脚全插

PART NO:	A01SBXXXXXXX-051	MATERIAL:	SEE NOTE
MODEL NO:	XX	FINISH:	SEE NOTE
UNIT:	MM	SIZE:	A4
TOLERANCE UNSPECIFIED	.x	DR:	xiaoyulong
	.xx	CHK:	
	.xxx	APP:	
	Ang.		
DWG NO:	A051	SCALE:	5:1
REV:	A	DATE:	2012.05.22