REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE

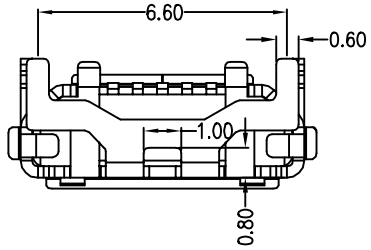





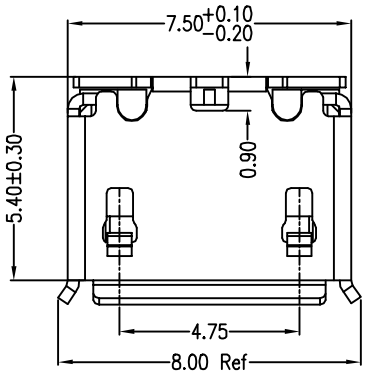



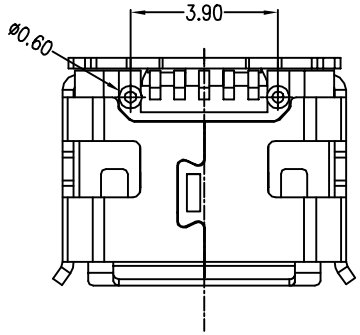

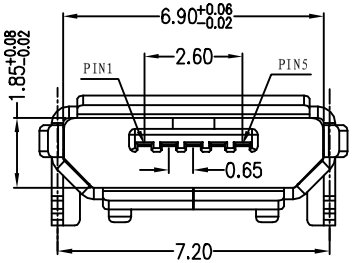

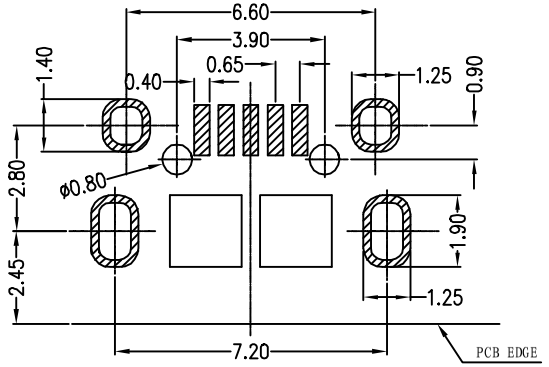

RECOMMAND PCB LAYOUT

Note:
1.Material:
- 1.1 Housing: LCP High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.15mm
- 1.3 Shell: SUS304,t=0.30mm

2.Specification:
- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 50 mW Max.
- 2.4 Insulation resistance: 100 MW Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.after 10000 insertion/extration cycles
- 2.7 Temperature range: -30°C~80°C

A 01 S B X X X X X X X 1-184
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬

① 产品代号 A:成品
② 产品系列 01:micro usb 5pos
③ 产品类别 S:母头
④ 产品类型 B:B TYPE
⑤ 外壳材质 7:SUS304R-1/2H
⑥ 外壳电镀 0:素材；1：Sn100u''
⑦ 端子材质 4:C5191R-EH
⑧ 端子电镀 0:素材;1:全Au1u'';2:全Au1.5u'';3:全Au3u'';4:全Au10u'';5:全Au15u'';6:全Au30u'';7:全Sn+Au1u'';8:全Sn+Au3u'';A:雾锡+Au1u'';B:雾镍Au1.5u'';C:雾镍Au3u'';D:雾镍Au5u''
⑨ 主体材质 1:LCP
⑩ 主体颜色 B:黑色
⑪ 包装方式 1:吸塑管；2:卷带
⑫ 下板类型 1:dip
⑬ 细节流水 184:MICRO USB 5S B TYPE牛角型前脚缺口全插6.60/7.2有柱短针新模

PART NO: A01SBXXXXXX1-184		MATERAL: SEE NOTE	深圳扬讯电子有限公司
MODEL NO: XX		FINSH: SEE NOTE	TITLE: MICRO USB 5S B TYPE牛角型前脚缺口全插6.60/7.2有柱短针新模
UNIT: MM	SIZE: A4	COLOR: SEE NOTE	
TOLERANCE UNSPECIFIED .x ±0.15 .xx ±0.10 .xxx ±0.05 Ang. ±1°		DR: 夏友红	DWG NO: A184 REV: A
		CHK:	SCALE: 5:1 DATE: 2012.07.13
		APP:	