

规格说明: Specifications:

电气特性: Electrical:


- 1. 额定电流: Current Rating
1.0A/contact terminal
- 2. 额定电压: Voltage Rating
30V DC
- 3. 接触阻抗: Contact Resistance
50 milliohms MAX
- 4. 耐电压: Dielectric Withstanding Voltage:
300 V AC At Sea Level
- 5. 绝缘阻抗: Insulation Resistance:
100MΩCA ohms MIN

物理性能: Mechanical:


- 1. 插拔力: Connector Mate and Umate Force
Mate force: 3.0kgf (MAX)
Umate force: 0.7kgf (MIN)
- 2. 端子保持力: Terminal Retention
0.5kgf (MIN)

原材料: Material:

- 1. 塑胶: Housing:
Hing Temperature Thermoplastics,
UL 94V-0 LCP Black
 - 2. 端子: Contact: Copper Alloy C5191/C2680
 - 3. 外壳: Shell: Copper Alloy C2680
- 电镀: Finish:**
- 1. 端子: Contact: Plated Gold in Mating Area:
Tin On Solder Tails
 - 2. 外壳: Shell:
Nickel Plating

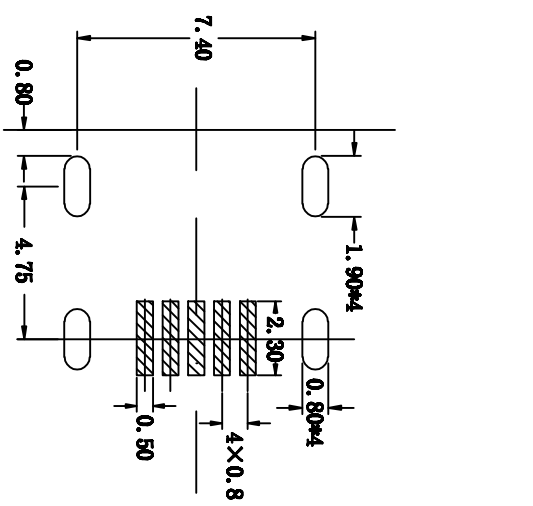

RECOMMENDED PCB LAYOUT



深圳扬讯电子有限公司

TOLERANCE:		DESIGN BY :		DATE :		PART NAME:	
X	±0.00	阮闪闪		2009-04-28		MINI USB BP 90° SMT 母	
X.X	±0.30	CHECKED BY:		DATE :		PART NO.	
X.XX	±0.20	杨冬梅		2009-04-28		YY-02-04-A-19	
X.XXX	±0.15	APPROVED BY:		DATE :		MOLD NO.	
X.±1	X.X ±0.05	胡超		2009-04-28		DRAW NO.	
UNIT: mm [inch]		SCALE:1:1		SIZE:A4		SHEET NO.	