


Thyristor Surge Suppressors(TSS)

●General description

P series is designed to protect low voltage or signal line, as well as power line communication circuit interface from damaging over-voltage transients .

The series provides a surface mount solution that enables equipment to comply with global regulatory standards.



●Features

- Low voltage overshoot.
- Low on-state voltage.
- Does not degrade surge capability after multiple surge within limit.
- Fails short circuit when surged in excess of ratings.
- Low Capacitance.

●Electrical characteristics

Part number	Type	V_{DRM}	I_{DRM}	V_S	I_S	I_H	V_T	I_T	C_o
		(V) Min	(μA) Max	(V) Max	(mA)Max	(mA) Min	(V) Max	(A)	(pF) Max
P0080XXX	A	6	5	25	800	50	4	2.2	80
P0300XXX	A	25	5	40	800	50	4	2.2	40
P0640XXX	A	58	5	77	800	120	4	2.2	65
P0720XXX	A	65	5	88	800	120	4	2.2	65
P0900XXX	A	75	5	98	800	120	4	2.2	50
P1100XXX	A	90	5	130	800	120	4	2.2	50
P1300XXX	A	120	5	160	800	120	4	2.2	50
P1500XXX	A	140	5	180	800	120	4	2.2	50
P1800XXX	A	170	5	220	800	120	4	2.2	60
P2100XXX	A	180	5	240	800	120	4	2.2	60
P2300XXX	A	190	5	260	800	120	4	2.2	60
P2600XXX	A	220	5	300	800	120	4	2.2	50
P3100XXX	A	275	5	350	800	120	4	2.2	40/20
P3500XXX	A	320	5	400	800	120	4	2.2	40/20
P0080XXX	B	6	5	25	800	50	4	2.2	100
P0300XXX	B	25	5	40	800	50	4	2.2	50
P0640XXX	B	58	5	77	800	120	4	2.2	80
P0720XXX	B	65	5	88	800	120	4	2.2	80
P0900XXX	B	75	5	98	800	120	4	2.2	70
P1100XXX	B	90	5	130	800	120	4	2.2	65
P1300XXX	B	120	5	160	800	120	4	2.2	60
P1500XXX	B	140	5	180	800	120	4	2.2	60

Part number	Type	V _{DRM}	I _{DRM}	V _S	I _S	I _H	V _T	I _T	C _o 1MHz,2V
		(V) Min	(μ A) Max	(V) Max	(mA)Max	(mA) Min	(V) Max	(A)	(pF) Max
P1800XXX	B	170	5	220	800	120	4	2.2	80
P2100XXX	B	180	5	240	800	120	4	2.2	80
P2300XXX	B	190	5	260	800	120	4	2.2	80
P2600XXX	B	220	5	300	800	120	4	2.2	70
P3100XXX	B	275	5	350	800	120	4	2.2	50/30
P3500XXX	B	320	5	400	800	120	4	2.2	45/30
P0080XXX	C	6	5	25	800	50	4	2.2	120
P0300XXX	C	25	5	40	800	50	4	2.2	60
P0640XXX	C	58	5	77	800	120	4	2.2	100
P0720XXX	C	65	5	88	800	120	4	2.2	100
P0900XXX	C	75	5	98	800	120	4	2.2	100
P1100XXX	C	90	5	130	800	120	4	2.2	90
P1300XXX	C	120	5	160	800	120	4	2.2	90
P1500XXX	C	140	5	180	800	120	4	2.2	90
P1800XXX	C	170	5	220	800	120	4	2.2	100
P2100XXX	C	180	5	240	800	120	4	2.2	100
P2300XXX	C	190	5	260	800	120	4	2.2	100
P2600XXX	C	220	5	300	800	120	4	2.2	80
P3100XXX	C	275	5	350	800	120	4	2.2	70/40
P3500XXX	C	320	5	400	800	120	4	2.2	65/35

●Surge ratings

	IPP						ITSM	di/dt
	2/10 μ s	8/20 μ s	10/160 μ s	10/560 μ s	5/310 μ s	10/1000 μ s	60 Hz	Amps/ μ s
	Amps	Amps	Amps	Amps	Amps	Amps	Amps	
A	150	150	90	50	75	50	20	500
B	250	250	150	100	100	80	25	500
C	500	400	200	150	150	100	30	500

●Thermal considerations

Package	Symbol	Parameter	Value	Unit
DO-214AC DO-214AA DO-15	T _j	Operating junction temperature range	-40 to 150	°C
	T _{stg}	Storage temperature range	-65 to 150	°C
	R _{th(j-a)}	Junction to ambient on printed circuit on recommended pad layout	90	°C/W

●I-V Curve Characteristics

I_S **Switching Current**

I_{DRM} **Leakage Current**

I_H **Holding Current**


I_T **On-state Current**

V_S **Switching Voltage**


V_{DRM} **Peak Off-state Voltage**

V_T **On-state Voltage**

C_o **Off-state Capacitance**

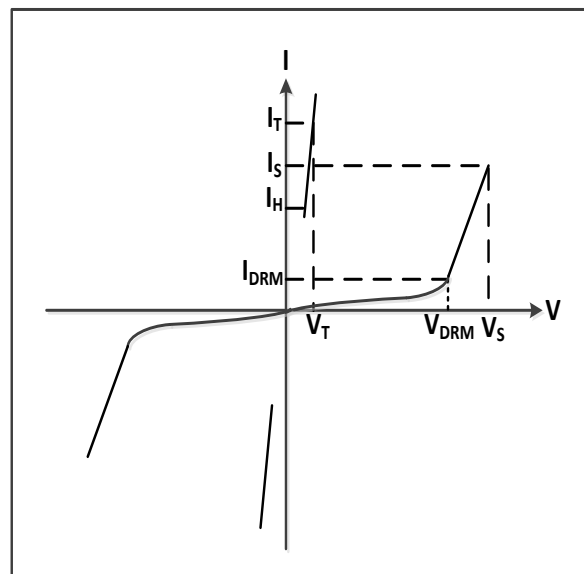


●Name rule

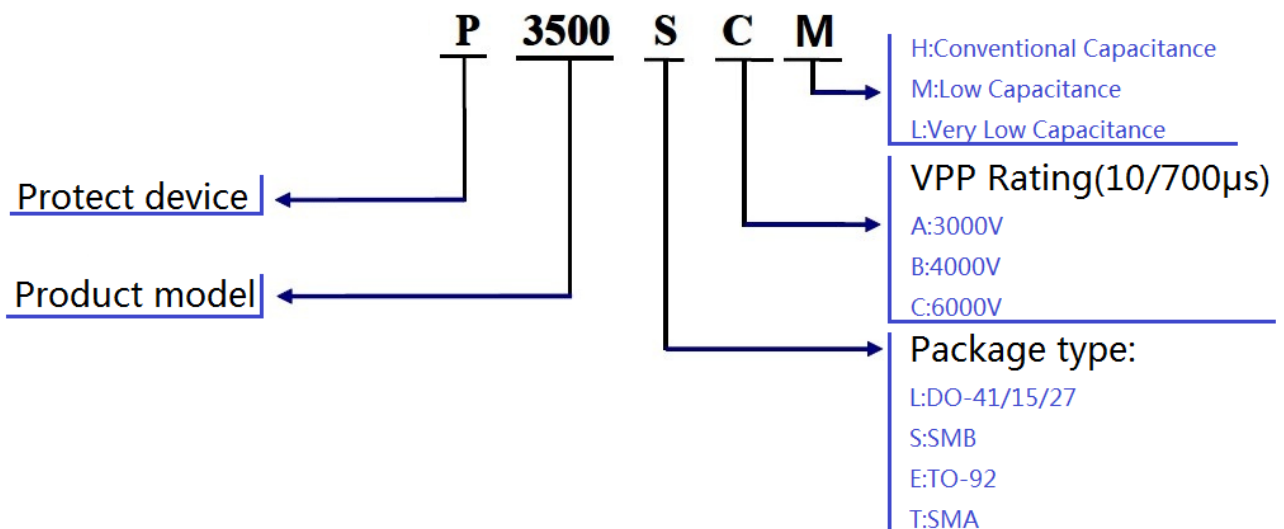


●Ratings and characteristic curves (T_A=25°C unless otherwise noted)


Tr x Td Pulse waveform

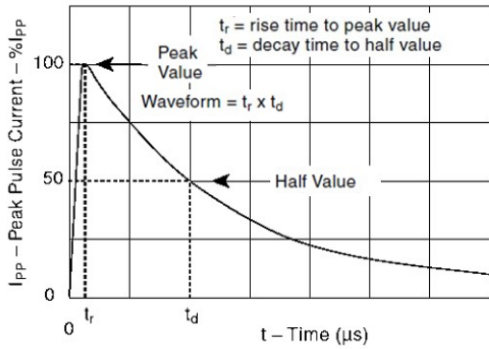


Normalized DC holding current vs. case temperature

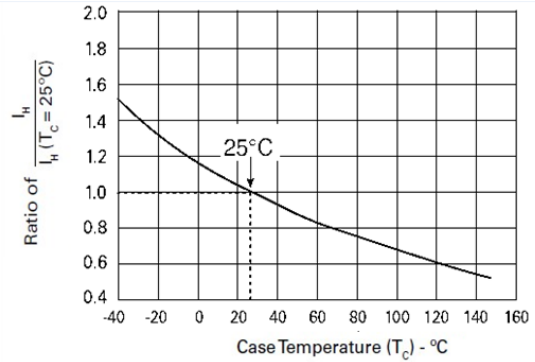

V_s change vs. junction temperature

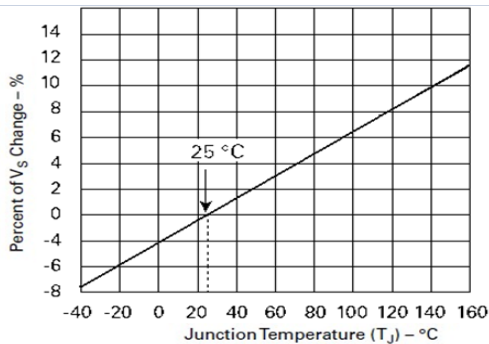


Co change vs. bias voltage (V_R=1V)

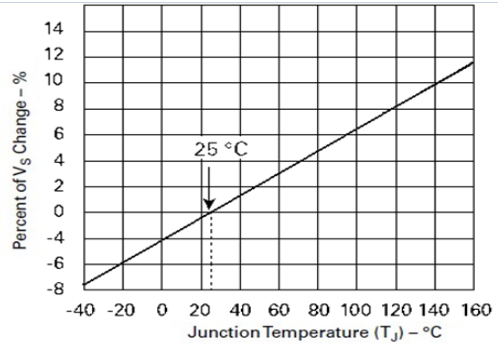

●Soldering Parameters

Reflow Condition	Pb-Free assembly (see Fig. 1)	
Pre Heat	-Temperature Min (T _{s(min)})	+150°C
	-Temperature Max (T _{s(max)})	+200°C
	-Time (Min to Max) (t _s)	60-180 secs.
Average ramp up rate (Liquidus Temp (T _L) to peak)		3°C/sec. Max.
T _{S(max)} to T _L - Ramp-up Rate		3°C/sec. Max.
Reflow	-Temperature (T _L) (Liquidus)	+217°C
	-Temperature (t _i)	60-150 secs.
Peak Temp (T _p)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t _p)		30 secs. Max.
Ramp-down Rate		6°C/sec. Max.
Time 25°C to Peak Temp (T _p)		8 min. Max.
Do not exceed		+260°C

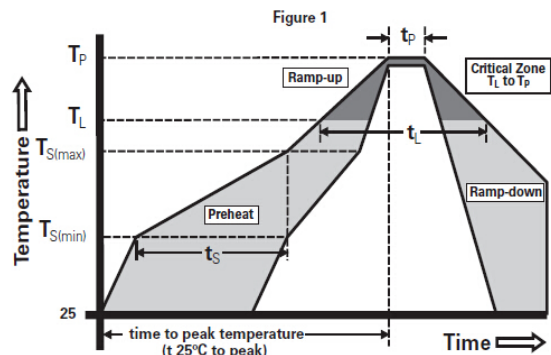

• Dimensions

DO-15

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	6.05	6.75	0.238	0.266
B	2.95	3.53	0.116	0.139
C	26	31	1.024	1.220
D	0.71	0.88	0.028	0.035

SMA
(DO-214AC)

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A1	1.90	2.45	0.075	0.094
A2	0.05	0.20	0.002	0.008
b	1.25	1.65	0.049	0.065
c	0.15	0.40	0.006	0.016
D	2.25	2.90	0.089	0.114
E	4.80	5.35	0.189	0.211
E1	3.95	4.60	0.156	0.181
L	0.75	1.50	0.030	0.059


SMB
(DO-214AA)

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A1	1.90	2.45	0.075	0.096
A2	0.05	0.20	0.002	0.008
b	1.95	2.20	0.077	0.087
c	0.15	0.40	0.006	0.016
E	5.10	5.60	0.201	0.220
E1	4.05	4.60	0.159	0.181
D	3.30	3.95	0.130	0.156
L	0.75	1.50	0.030	0.059

•Tape and reel specification

Package Type	Quantity
SMA	5000

Symbol	Spec	Symbol	Spec
W	12.00±0.10	A ₀	2.79±0.10
E	1.75±0.10	B ₀	5.33±0.10
F	5.50±0.05	K ₀	2.36±0.10
D ₀	1.55±0.10		
D ₁	1.50±0.10		
P ₀	4.00±0.10		
P ₁	4.00±0.10		
P ₂	2.00±0.10		
t	0.25±0.05		
t1	0.05以上		

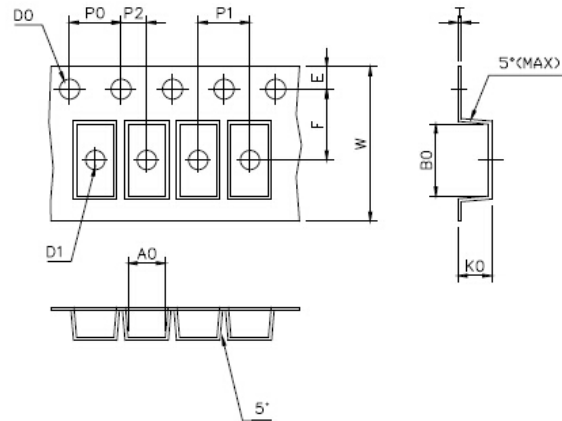

Package Type	Quantity
SMB	3000

Symbol	Spec	Symbol	Spec
W	12.00±0.10	A ₀	3.76±0.10
E	1.75±0.10	B ₀	5.69±0.10
F	5.50±0.05	K ₀	2.67±0.10
D ₀	1.55±0.10		
D ₁	1.50±0.10		
P ₀	4.00±0.10		
P ₁	8.00±0.10		
P ₂	2.00±0.10		
t	0.23±0.05		
t1	0.05以上		

