


MODEL: BF-C660

400V | 1500rpm | 50Hz

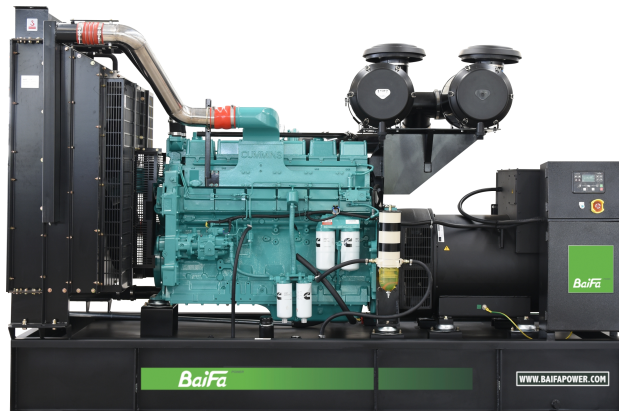

ESP Standby Power	650 kVA	PRP Prime Power	575 kVA
ENGINE	CCEC Cummins KTAA19-G6	ALTERNATOR	STAMFORD HCI544E1

GENERAL FEATURES

Engine: CCEC Cummins KTAA19-G6

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BF-C660

400V | 1500rpm | 50Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	852	520/650	460/575
415/240	50	3	0.8	904	520/650	460/575
400/230	50	3	0.8	938	520/650	460/575
380/220	50	3	0.8	987	520/650	460/575

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

**MODEL: BF-C660****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	CCEC Cummins KTAA19-G6
Air intake system	Turbo, Air/Air cooling
Fuel system	PT type fuel pump, EFC
Cylinder arrangement	6 in line
Displacement	18.9L
Bore and stroke	159*159 (mm)
Compression ratio	13.5:1
Rated speed	1500rpm
Max. Standby power at rated speed	570KW/775HP
Governor type	Electronic

Exhaust System

Exhaust gas flow	119.52 m ³ /min
Exhaust temperature	490 °C
Max back pressure	10kPa

Air Intake System

Max intake restriction	6.23kPa
Combustion air flow	45 m ³ /min
Air flow required for radiator	900 m ³ /min

**MODEL: BF-C660****400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	215 g/kWh	126.7 L/h
Fuel consumption @ 75% (Prime Power) Load	213 g/kWh	94.5 L/h
Fuel consumption @ 50% (Prime Power) Load	215 g/kWh	65.0 L/h

Oil System

Total oil capacity	50L
Oil consumption	≤4g/kwh
Oil sump capacity	32~38L

Cooling System

Coolant capacity	116L
Max water temperature	104℃



**MODEL: BF-C660****400V | 1500rpm | 50Hz**

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	610kVA
Alternator Efficiency	94.9%

**MODEL: BF-C660****400V | 1500rpm | 50Hz**

GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
----------------------------------	----------------

Steady-state voltage deviation	$\leq \pm 1\%$
--------------------------------	----------------

Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
---	--------------

Transient voltage deviation (sudden power increase)	$\leq -20\%$
---	--------------

Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
---	-----------

Voltage recovery time (sudden power increase)	$\leq 6S$
---	-----------

Related range of frequency setting	0-5% adjustable
------------------------------------	-----------------

Steady-state frequency band	$\leq 1.5\%$
-----------------------------	--------------

Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
---	--------------

Transient frequency deviation (sudden power increase)	$\leq -10\%$
---	--------------

Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
---	-----------

Frequency recovery time (sudden power increase)	$\leq 5S$
---	-----------

STANDARD FEATURES

Standard auto control system

Exhaust system (including until muffler)

Documents

Oil drain valve

Starting batteries (maintenance-free & watering-free) with connective wires

Special tools

MCCB

MODEL: BF-C660**400V | 1500rpm | 50Hz****OPTIONS**

Daily fuel tank

Rainproof type

Remote control panel

Alternator heater

Soundproof type

Paralleling system

Spare parts

Trailer type

Switch box

Automatic transfer switch

DIMENSIONS & WEIGHT**Standard Configuration (open type)**

Overall Dimensions: 3650×1450×2200 mm

Weight: 4550 kg

Standard Configuration (with base fuel tank)

Overall Dimensions: 3650×1450×2200 mm

Weight: 4820 kg

Soundproof Type

Overall Dimensions: 5030×1860×2550 mm

Weight: 6500 kg

*Specifications are subject to change without notice.***BAIFA POWER (WUXI) LTD.****WEBSITE: WWW.BAIFAPOWER.COM****EMAIL: MARKETING@BAIFAPOWER.COM****TEL: +86-510-85342633**

Comprehensive Solutions For

POWER GENERATION