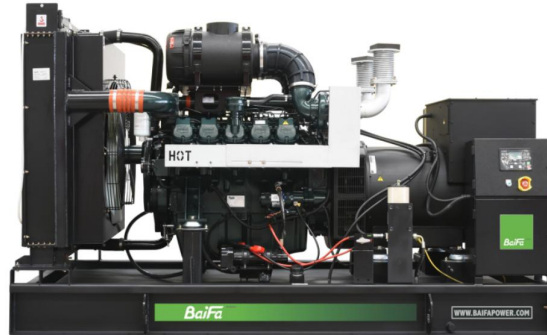


MODEL: BF-DW825

400V | 1500rpm | 50Hz



ESP Standby Power	825 kVA	PRP Prime Power	750 kVA
ENGINE	Doosan DP222LC	ALTERNATOR	STAMFORD S5L1D-H4

GENERAL FEATURES

Engine: Doosan DP222LC

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BF-DW825**400V | 1500rpm | 50Hz**

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COS Φ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	1083	660kW/825kVA	600kW/750kVA
415/240	50	3	0.8	1148	660kW/825kVA	600kW/750kVA
400/230	50	3	0.8	1191	660kW/825kVA	600kW/750kVA
380/220	50	3	0.8	1253	660kW/825kVA	600kW/750kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

Comprehensive Solutions For

POWER GENERATION

**MODEL: BF-DW825****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Doosan DP222LC
----------------------	----------------

Air intake system	Turbo, Air/Air cooling
-------------------	------------------------

Fuel system	P type fuel pump
-------------	------------------

Cylinder arrangement	12 in V
----------------------	---------

Displacement	21.927L
--------------	---------

Bore and stroke	128×142 mm
-----------------	------------

Compression ratio	15:1
-------------------	------

Rated speed	1500rpm
-------------	---------

Max. Standby power at rated speed	723kW
-----------------------------------	-------

Governor type	Electronic
---------------	------------

Exhaust System

Exhaust gas flow	108 m ³ /min
------------------	-------------------------

Exhaust temperature	502℃
---------------------	------

Max back pressure	5.9kPa
-------------------	--------

Air Intake System

Max intake restriction	6.23kPa
------------------------	---------

Combustion air flow	45 m ³ /min
---------------------	------------------------

Air flow required for radiator	860 m ³ /min
--------------------------------	-------------------------



MODEL: BF-DW825

400V | 1500rpm | 50Hz

Fuel System

Fuel consumption @ 100% (Prime Power) Load	161 L/h
Fuel consumption @ 75% (Prime Power) Load	119.1 L/h
Fuel consumption @ 50% (Prime Power) Load	79.3 L/h

Oil System

Total oil capacity	40L
Oil sump capacity	27-40L

Cooling System

Coolant capacity	114L
Max water temperature	103°C



**MODEL: BF-DW825****400V | 1500rpm | 50Hz**

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	750kVA
Alternator Efficiency	94.6%

**MODEL: BF-DW825****400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
----------------------------------	----------------

Steady-state voltage deviation	$\leq \pm 1\%$
--------------------------------	----------------

Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
---	--------------

Transient voltage deviation (sudden power increase)	$\leq -20\%$
---	--------------

Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
---	-----------

Voltage recovery time (sudden power increase)	$\leq 6S$
---	-----------

Related range of frequency setting	0-5% adjustable
------------------------------------	-----------------

Steady-state frequency band	$\leq 1.5\%$
-----------------------------	--------------

Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
---	--------------

Transient frequency deviation (sudden power increase)	$\leq -10\%$
---	--------------

Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
---	-----------

Frequency recovery time (sudden power increase)	$\leq 5S$
---	-----------

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
------------------------------	--	-----------

Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB
-----------------	---	------

MODEL: BF-DW825**400V | 1500rpm | 50Hz****OPTIONS**

Daily fuel tank

Rainproof type

Remote control panel

Alternator heater

Soundproof type

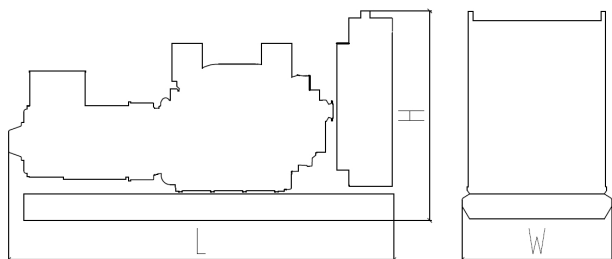
Paralleling system

Spare parts

Trailer type

Switch box

Automatic transfer switch

DIMENSIONS & WEIGHT**Standard Configuration (open type)**

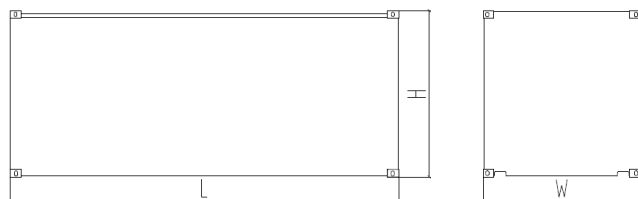
Overall Dimensions: 3480×1390×1820 mm

Weight: 4600 kg

Standard Configuration (with base fuel tank)

Overall Dimensions: 3480×1390×1950 mm

Weight: 4700 kg

**Soundproof Type**

Overall Dimensions: 5030×1660×2250 mm

Weight: 6000 kg

*Specifications are subject to change without notice.***BAIFA POWER (WUXI) LTD.****WEBSITE: WWW.BAIFAPOWER.COM****EMAIL: MARKETING@BAIFAPOWER.COM****TEL: +86-510-85342633**

Comprehensive Solutions For

POWER GENERATION