


MODEL: BF-SC350

400V | 1500rpm | 50Hz

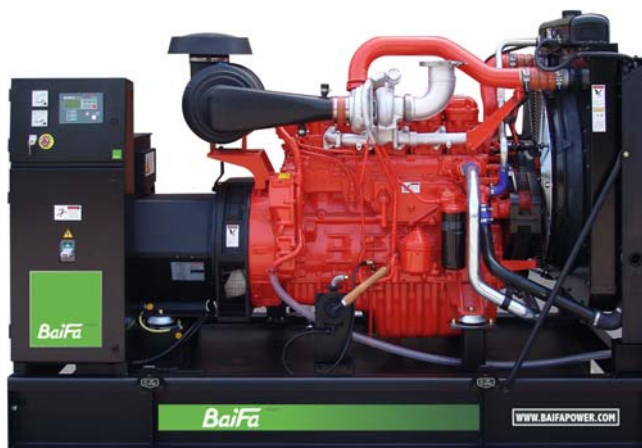

ESP Standby Power	330kVA	PRP Prime Power	300kVA
ENGINE	Scania	ALTERNATOR	STAMFORD
	DC09 072A 02-13		S4L1D-D41

GENERAL FEATURES

Engine: Scania DC09 072A 02-13

Alternator: single bearing, IP23, insulation class H

50°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BF-SC350

400V | 1500rpm | 50Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	433	264kW/330kVA	240kW/300kVA
415/240	50	3	0.8	459	264kW/330kVA	240kW/300kVA
400/230	50	3	0.8	476	264kW/330kVA	240kW/300kVA
380/220	50	3	0.8	501	264kW/330kVA	240kW/300kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: BF-SC350**400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Scania DC09 072A 02-13
----------------------	------------------------

Air intake system	Turbo, Air/Air Cooling
-------------------	------------------------

Fuel system	Electronic Injection
-------------	----------------------

Cylinder arrangement	5 in line
----------------------	-----------

Displacement	9.3L
--------------	------

Bore and stroke	130×140 mm
-----------------	------------

Compression ratio	16:1
-------------------	------

Rated speed	1500rpm
-------------	---------

Max. Standby power at rated speed	294kW
-----------------------------------	-------

Governor type	EMS
---------------	-----

Exhaust System

Exhaust gas flow	24kg/min
------------------	----------

Exhaust temperature	506°C
---------------------	-------

Max back pressure	10kPa
-------------------	-------

Air Intake System

Max intake restriction	6.5kPa
------------------------	--------

Combustion air flow	23kg/min
---------------------	----------

Air flow required for radiator	180kg/min
--------------------------------	-----------

MODEL: BF-SC350**400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	194g/kWh	60L/h
Fuel consumption @ 75% (Prime Power) Load	188g/kWh	44L/h
Fuel consumption @ 50% (Prime Power) Load	192g/kWh	30L/h

Oil System

Total oil capacity	36L
Oil consumption ratio based on fuel consumption data	≤0.2g/kwh
Oil sump capacity	31-36L

Cooling System

Coolant capacity	37L
Max water temperature	95°C

MODEL: BF-SC350**400V | 1500rpm | 50Hz****ALTERNATOR SPECIFICATION**

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	310kVA
Alternator Efficiency	92.9%

MODEL: BF-SC350**400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
Transient voltage deviation (sudden power increase)	$\leq -15\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
Voltage recovery time (sudden power increase)	$\leq 4S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 0.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
Transient frequency deviation (sudden power increase)	$\leq -7\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
Frequency recovery time (sudden power increase)	$\leq 3S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB

MODEL: BF-SC350

400V | 1500rpm | 50Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

DIMENSIONS & WEIGHT



Standard Configuration (open type)
Overall Dimensions: 2840×1270×1790 mm
Weight: 2360 kg
Standard Configuration (with base fuel tank)
Overall Dimensions: 2840×1270×1795 mm
Weight: 2385 kg
Soundproof Type
Overall Dimensions: 3890×1460×2150 mm
Weight: 3275 kg

Specifications are subject to change without notice.

BAIFA POWER (WUXI) LTD.
WEBSITE: WWW.BAIFAPOWER.COM
EMAIL: MARKETING@BAIFAPOWER.COM
TEL: +86-510-85342633